

Order at 訂貨熱線 :

香港批發/分銷 T (852) 2781 2855

澳門批發/分銷 T (853) 2822 2751

工程/商業項目 T (852) 2691 9166

E enquiry@supermoon.hk

www.supermoon.hk



# 2016/2017 LED LIGHTING CATALOG

INTERNATIONAL

# CONTENTS

## The Cree Advantage

|                                  |    |                                  |    |
|----------------------------------|----|----------------------------------|----|
| Proven, Revolutionary Technology | 3  | Colorfast DeltaGuard® Finish     | 13 |
| Better Light                     | 4  | A Total Systems Approach         | 14 |
| Cree WaveMax™ Technology         | 7  | Benefits at Every Turn           | 16 |
| Cree SmartCast® Technology       | 8  | Cree Quick Ship Program          | 17 |
| Cree TrueWhite® Technology       | 11 | Industry-Leading Limited Warrant | 17 |
| NanoOptic® Technology            | 12 |                                  |    |

## Indoor LED Products


|                              |           |                                       |           |
|------------------------------|-----------|---------------------------------------|-----------|
| Indoor Product Overview      | 18        | <b>LED HIGH-BAY/LOW-BAY</b>           | <b>58</b> |
| Indoor Applications          | 20        | CXB Series                            | 60        |
| <b>LED DOWNLIGHTS</b>        | <b>22</b> | Cree Edge™ Series High Output         | 62        |
| LR Series                    | 24        | 304 Series™                           | 64        |
| CR Series                    | 26        | Cree Edge™ Series                     | 66        |
| <b>LED TROFFERS</b>          | <b>32</b> | <b>LED LAMPS &amp; ACCENTS</b>        | <b>68</b> |
| LR Series                    | 34        | MR16 Series                           | 70        |
| CR Series                    | 36        | <b>INTELLIGENT LIGHTING SOLUTIONS</b> | <b>72</b> |
| LE Series Light Engine       | 38        | Cree SmartCast® Technology - Wireless | 74        |
| ZR Series                    | 40        |                                       |           |
| <b>LED UPGRADE SOLUTIONS</b> | <b>42</b> |                                       |           |
| UR Series                    | 44        |                                       |           |
| <b>LED SUSPENDED AMBIENT</b> | <b>46</b> |                                       |           |
| LN Series                    | 48        |                                       |           |
| CS Series                    | 50        |                                       |           |
| <b>LED SUSPENDED AMBIENT</b> | <b>52</b> |                                       |           |
| LS Series                    | 54        |                                       |           |
| WS Series                    | 56        |                                       |           |



The all-new RSW Series LED street light luminaire

## Outdoor LED Products

|  |            |                                |            |
|--|------------|--------------------------------|------------|
| Outdoor Product Overview                   | 76         |                                |            |
| Outdoor Applications                       | 78         |                                |            |
| <b>LED AREA</b>                            | <b>80</b>  |                                |            |
| OSQ Series                                 | 82         |                                |            |
| XSP Series                                 | 84         |                                |            |
| XSP Series High Output                     | 86         |                                |            |
| Cree Edge™ Series Pole                     | 88         |                                |            |
| Cree Edge™ Series High Output              | 90         |                                |            |
| Cree Edge™ Series Pathway                  | 92         |                                |            |
| <b>LED STREET &amp; ROADWAY</b>            | <b>94</b>  |                                |            |
| RSW Series                                 | 96         |                                |            |
| RUL Series                                 | 98         |                                |            |
| XSP Series                                 | 100        |                                |            |
| XSP Series High Output                     | 102        |                                |            |
| LEDway® Series                             | 104        |                                |            |
| LEDway® Series High Output                 | 106        |                                |            |
| Cree Edge™ Series                          | 108        |                                |            |
| <b>LED DECORATIVE STREET &amp; ROADWAY</b> | <b>110</b> |                                |            |
| DPT Series                                 | 112        |                                |            |
| Post-Top LED Upgrade Kit                   | 114        |                                |            |
|  |            | <b>LED CANOPY &amp; SOFFIT</b> | <b>116</b> |
|  |            | CPY Series                     | 118        |
|  |            | 228 Series™                    | 120        |
|  |            | 304 Series™                    | 122        |
|  |            | Cree Edge™ Series              | 124        |
|  |            | <b>LED PARKING STRUCTURE</b>   | <b>126</b> |
|  |            | IG Series                      | 128        |
|  |            | 304 Series™                    | 130        |
|  |            | VG Series                      | 132        |
|  |            | <b>LED FLOOD</b>               | <b>134</b> |
|  |            | OSQ Series                     | 136        |
|  |            | Cree Edge™ Series              | 138        |
|  |            | 304 Series™                    | 140        |
|  |            | OL Series™                     | 142        |
|  |            | <b>LED WALL MOUNT</b>          | <b>144</b> |
|  |            | XSP Series                     | 146        |
|  |            | Cree Edge™ Series              | 148        |

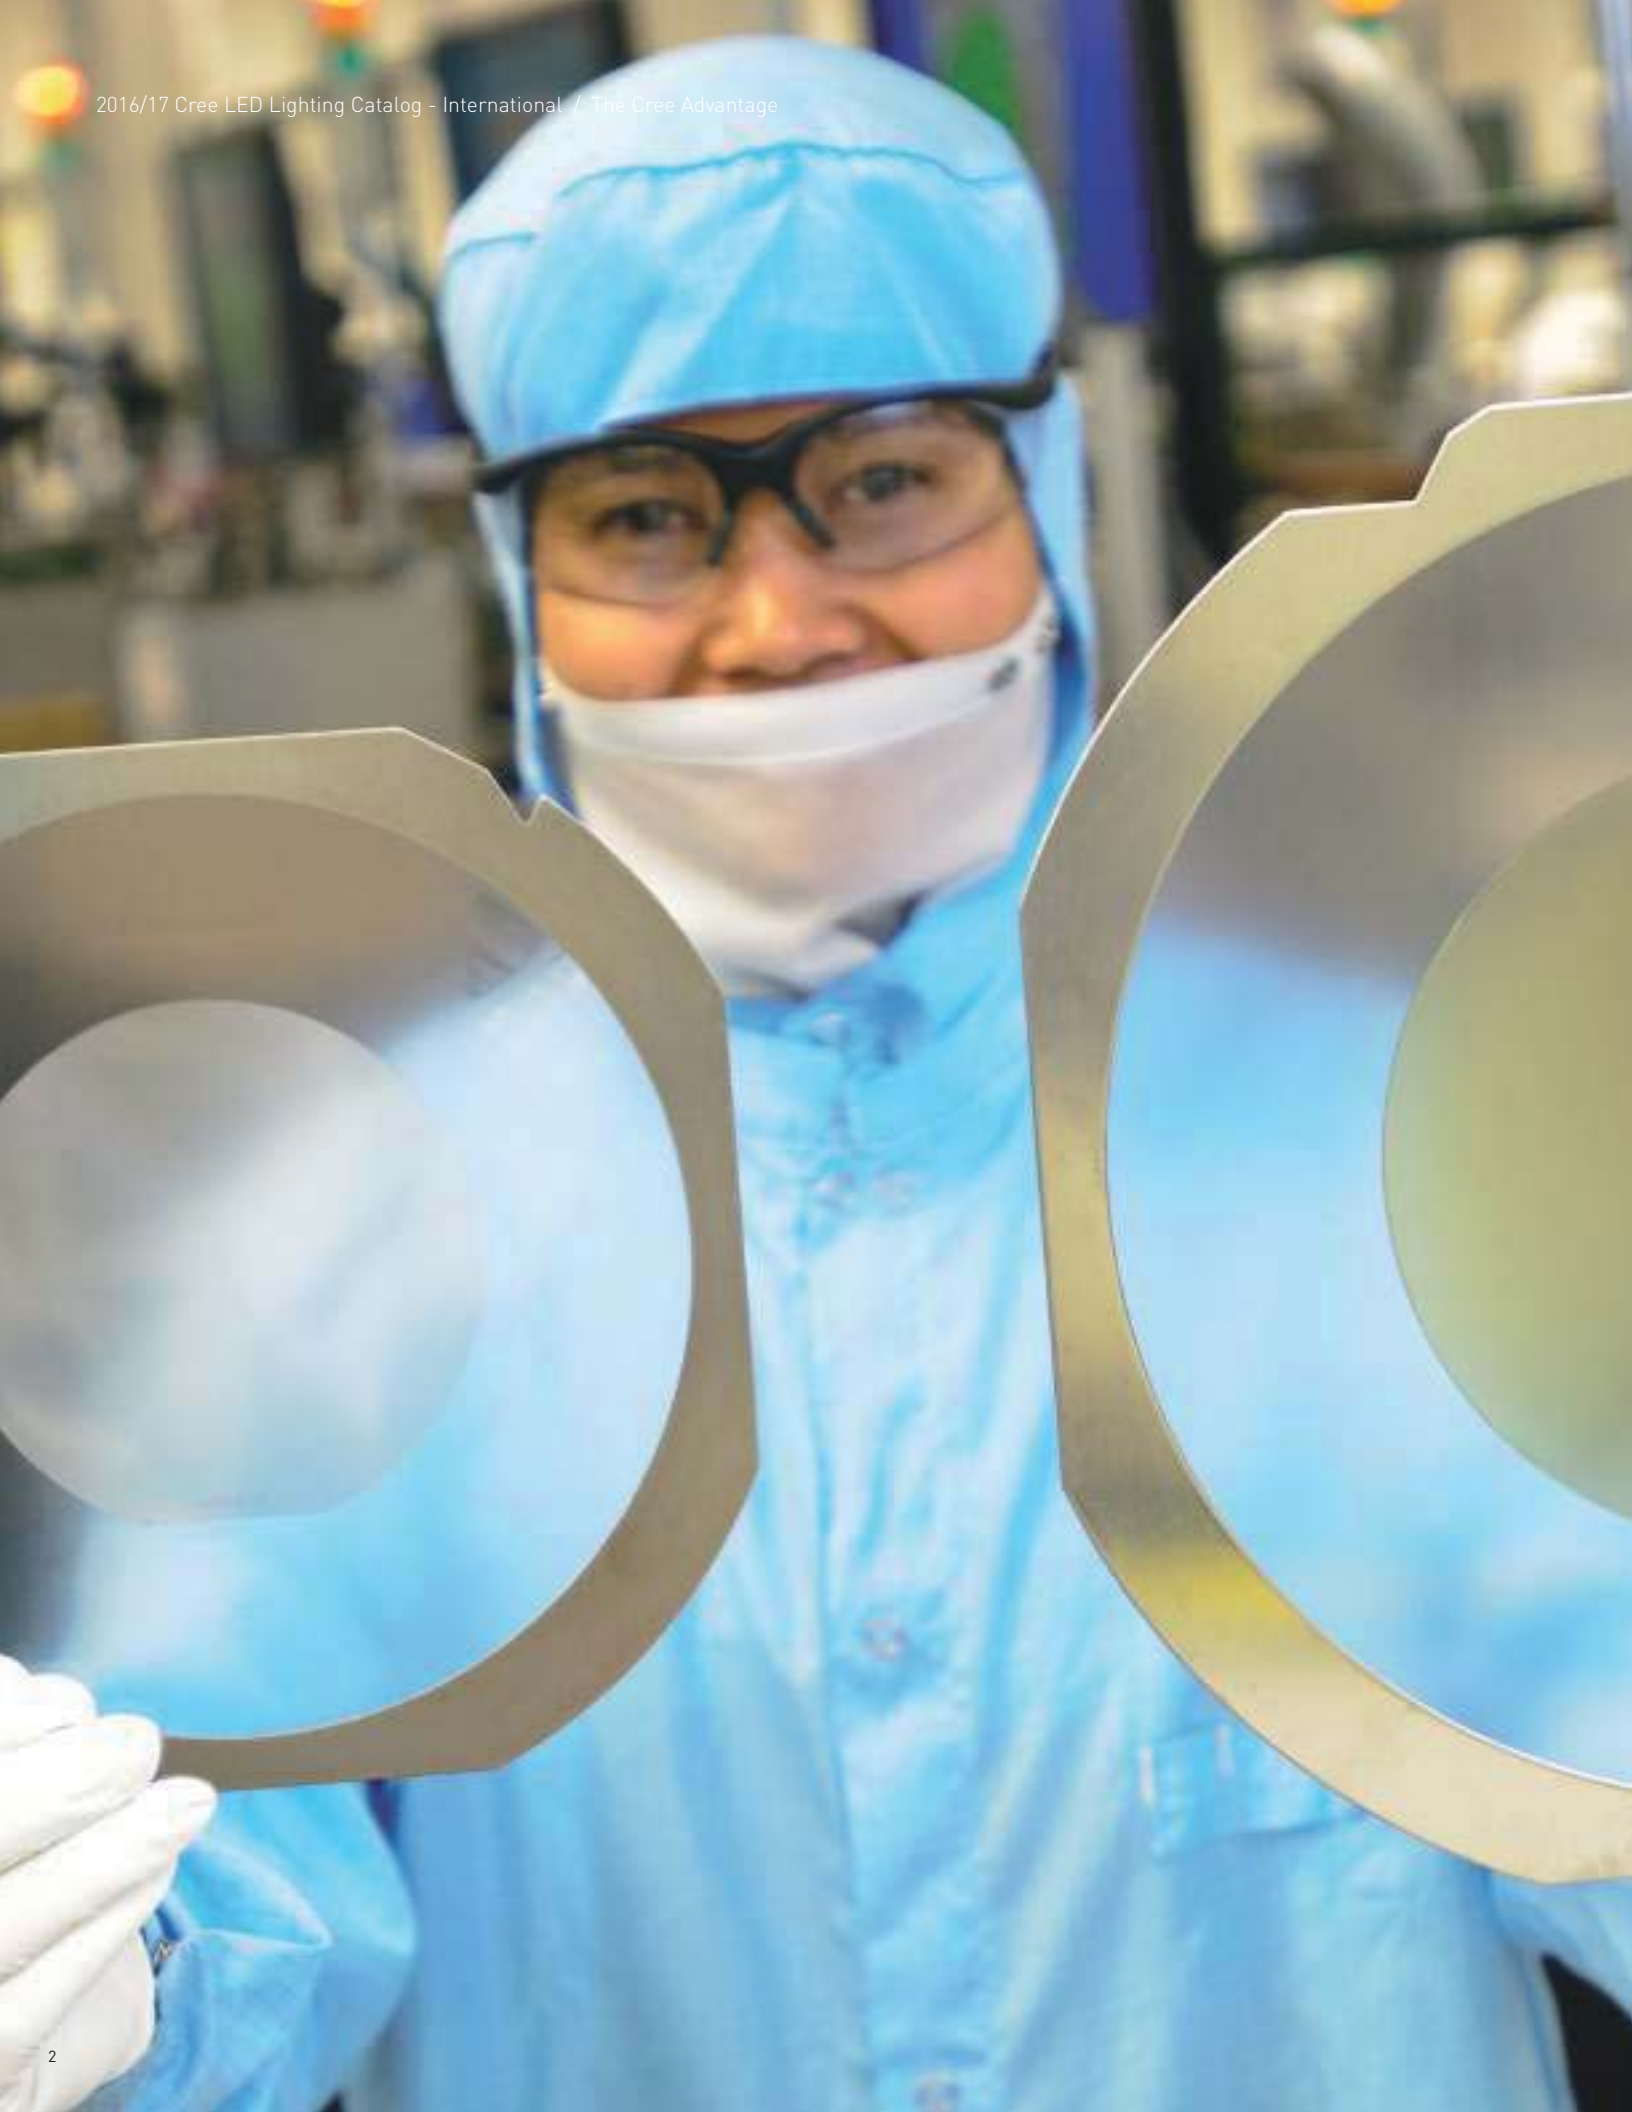

The Cree Advantage

## PROVEN, REVOLUTIONARY TECHNOLOGY

As the leading fully-integrated innovator of LED chips, components and complete lighting systems, Cree is continuously advancing our state-of-the-art LED lighting products to provide energy-efficient lighting that will look and operate as expected for years to come.

## TRUE INNOVATION, SUPERIOR VALUE

**Innovation** — it's what drives everything we do. Cree's leadership begins with innovative materials that provide high-efficiency performance for each lamp and luminaire found within our product portfolio. With over a quarter century of experience, Cree has a deep understanding of the science behind LED lighting and provides a complete collection of indoor and outdoor LED lighting solutions to match your application.

With a large installation base of our flagship LED troffers and our industry-leading LED roadway lighting fixtures installed around the globe, Cree has a solid reputation for delivering top-performing LED lighting.

Cree remains at the forefront today, dedicated to developing new LED solutions that improve both our customers' spaces and their bottom lines. As our product lines grow, we not only build on our history of innovation, we also extend our record of delivering superior value with beautiful, energy-efficient lighting.



## The Cree Advantage

# BETTER LIGHT CHANGES EVERYTHING

LED lighting – with its high quality, long life and low energy consumption – has improved our world and ended the century-old era of traditional light. But for Cree, this is just the beginning. Our foundation is built on the belief that LED technology will go beyond creating good light sources to deliver vastly improved and entirely new light experiences. At Cree, we call this ‘better light’ and we believe it’s our right.

## BETTER LIGHT CAN CHANGE OUR WORLD

### Better Light That Improves Our Environment

Better light makes everything look better, but it can also foster attentiveness. So kids can learn more at school. And better light can improve productivity, so we’d all get a little more done at work – all using less energy. Better light even makes us safer on the drive home. And more comfortable once we get there.



### Better Light That is Intelligent by Design

But better light isn’t just better. It’s smarter too. Cree’s intelligent lighting solution automatically adapts to us and our environment for a more personalized experience. It knows when we’re there, and when we’re not. Everywhere we go, better light is a step ahead, making us more productive at work. Adjusting to sunlight to save money. Linking up, so fixtures work as a team with endless smart building applications to amplify productivity and savings. And that connected system? It’s live in minutes, not weeks.



### LEARN MORE

Visit [betterlight.cree.com](http://betterlight.cree.com) to learn how Better Light is changing our world.

### Better Light That is Open to Innovation

Cree embraces cooperation to get beyond the imagined possibilities of what light can do. Better light is true innovation. Capabilities and technology that fundamentally elevate the lighting experience.

Better light changes everything, and with Cree, everything’s about to change.



LIGHT A BETTER WAY







The Cree Advantage


# CREE WAVEMAX™ TECHNOLOGY

Cree WaveMax™ Technology is a breakthrough in the execution of waveguide technology that challenges industry-standard assumptions of how light is delivered. Featuring up to 90% optical efficiency and precise optical control, Cree WaveMax™ Technology enables customers to obtain unmatched visual comfort and improved color quality without sacrificing performance. This transformative technology redefines the limits of fixture design to optimize performance and provides more aesthetic options at an unmatched customer value.

## Harnessing the Benefits of Total Internal Reflection

In developing WaveMax™ Technology, Cree engineers leveraged a property known as Total Internal Reflection that captures light within the internal geometry of the optical waveguide platform. To release and control the light, Cree engineers devised yet another innovation: DiamondFacet™ optical elements – unique microscopic features located within the optical waveguide platform that extract and deliver light with exceptional control, uniformity and efficiency.

Featuring Cree DiamondFacet™ optical elements to achieve up to 90 percent optical efficiency and precise optical control, Cree WaveMax Technology can deliver unmatched visual comfort, uniform illumination and improved color quality while enabling unprecedented design capabilities and energy-saving potential for modern LED luminaires. As a result, high-CRI (color rendering index) lighting and warmer color temperatures can be achieved without sacrificing efficacy while enhancing the ability to achieve USGBC LEED® certification.

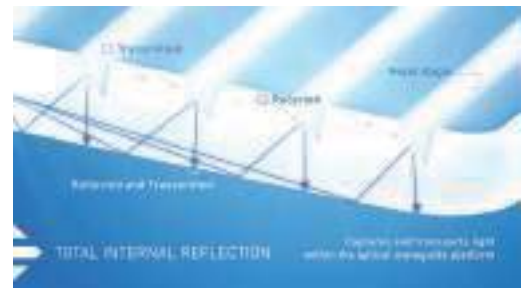

### WATCH THE VIDEO

Visit [www.cree.com/wavemax](http://www.cree.com/wavemax) to watch the video.

## The Cree Advantage

# CREE SMARTCAST® TECHNOLOGY

What if you could easily transform your existing facilities into energy-efficient spaces with automated intelligence to optimize light levels. With Cree SmartCast® Technology, we've totally redefined intelligent lighting by making it so intuitive and simple, it just works — for you and for everyone who experiences it.

Within each SmartCast® enabled luminaire, integrated sensors, cutting-edge electronics and software all work together using the language of light and intelligent algorithms to automatically learn and interact with each other and with your space. The result is a seamless application of scalable intelligent light strategies that can save you up to 70% in energy costs while delivering more comfortable, personalized lighting experiences.

And if you're ready to connect to the Internet of Things (IoT), SmartCast® Technology offers an open, scalable platform that works seamlessly with smart building applications to amplify savings and further optimize environments, delivering even more value. The best part: All of this is employed with OneButton™ Setup, enabling an entire building to be commissioned and connected at one time.

## So Easy, the Building of the Future Can Be the One You're Already In.

### Environmental Awareness and Control

Embedded sensors continually detect and share data on room occupancy and ambient light to fine-tune your environment and energy-saving strategies in real time.

### Simple Set-Up and Commissioning


OneButton™ Setup commissions up to 1,000 luminaires in a single step, providing smart lighting that meets existing and emerging buildings codes, wirelessly and over Power over Ethernet (PoE) — live in minutes, not weeks.

### A Platform for Intelligent Lighting

SmartCast® Technology orchestrates the optimal environment for energy efficiency and productivity by setting parameters for brightness and color, adjusting color temperatures to tasks and personal preferences, and tracking improvements.

### Innovative Connectivity

SmartCast® Technology with PoE creates secure building-wide networks that connect seamlessly with other building management systems and with the cloud, for even more value.

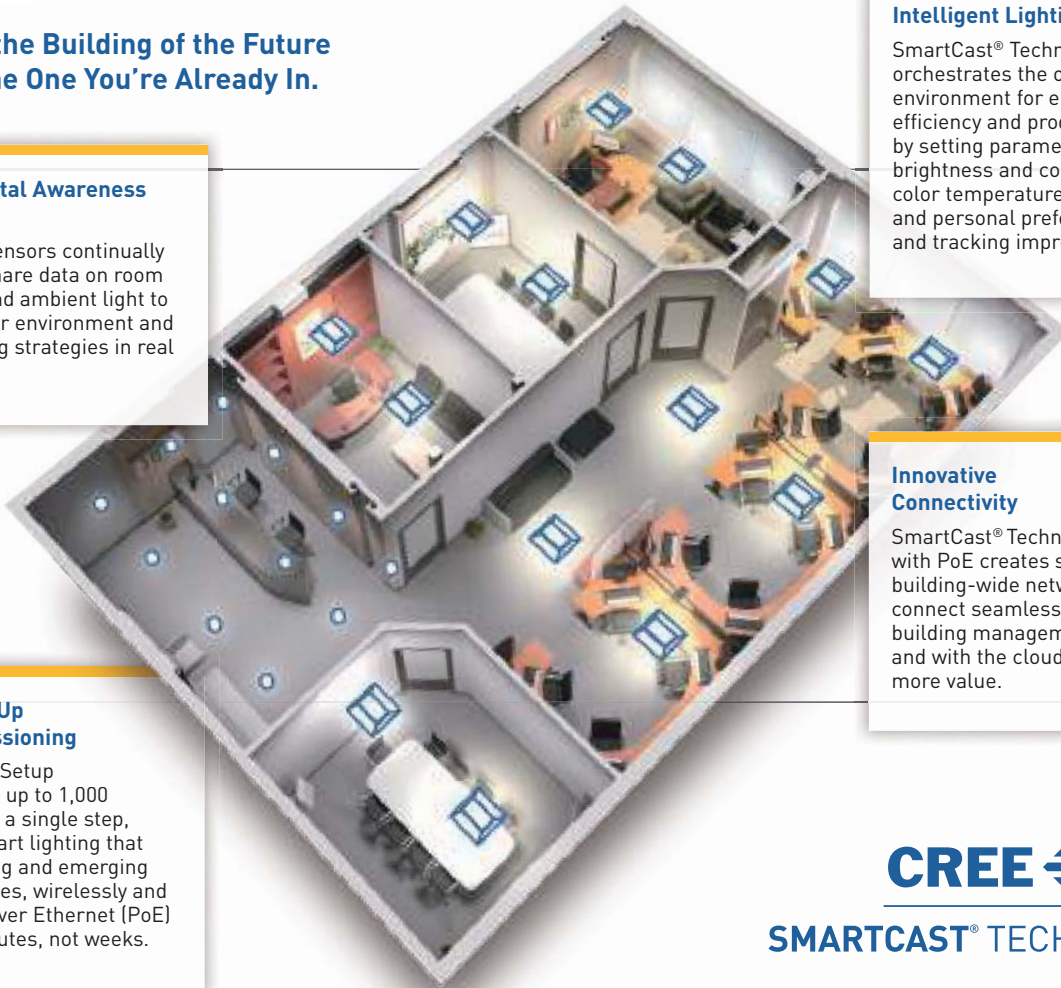

**CREE** 

**SMARTCAST® TECHNOLOGY**



**VISIT THE MICROSITE**  
Go to [lighting.cree.com/SmartCast](http://lighting.cree.com/SmartCast) to watch the video and learn more about Cree intelligent light solutions.

**Comparison:**  
**Fluorescent Lighting vs. Cree**  
**TrueWhite® Technology LED Lighting**



**Before:** Fluorescent Lighting

**Like Halogen, But Better**

The Spectral Power Distribution (SPD) curves shown here provide a great way to compare the color characteristics of Cree TrueWhite® Technology with traditional technologies. At each point across the visible color spectrum, the height of the SPD curve correlates with how accurately that color is rendered by the light source. The fuller, more continuous curve of Cree TrueWhite® Technology enables our LED luminaires to precisely render a much larger color set than CFLs. The similarities in the Cree TrueWhite® Technology and incandescent SPD curves also give our luminaires their signature halogen-like light, while still using a fraction of the energy of even CFLs.



**After:** Cree TrueWhite® Technology LED Lighting




The Cree Advantage

# CREE TRUEWHITE® TECHNOLOGY

Color is a critical element in every interior; it establishes the personality and tone of a space. It not only shapes our moods, it can influence our buying decisions and enhance our ability to learn and interact with others.

In these ways, the color rendering property of light plays a powerful role in creating spaces that appeal, inspire and inform. Fixtures powered by Cree TrueWhite® Technology use an exclusive combination of 90+ CRI, high R9 values, beautiful light characteristics and lifelong color consistency to render the true colors of everything from fresh fruit to school books, delivering value far beyond financial savings.

And unlike with other white LED technologies, the luminaire efficacy of Cree TrueWhite® products does not diminish at lower color temperatures or with higher CRI. This means our luminaires can provide warm white light with high color rendering, all with maximum luminaire efficacy – a true no-compromise solution.

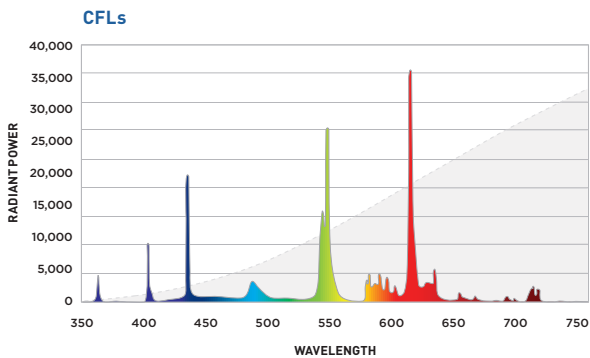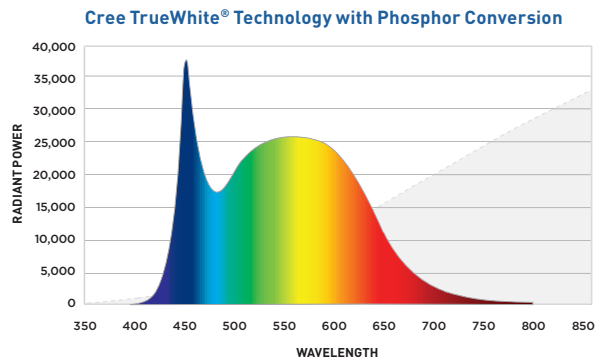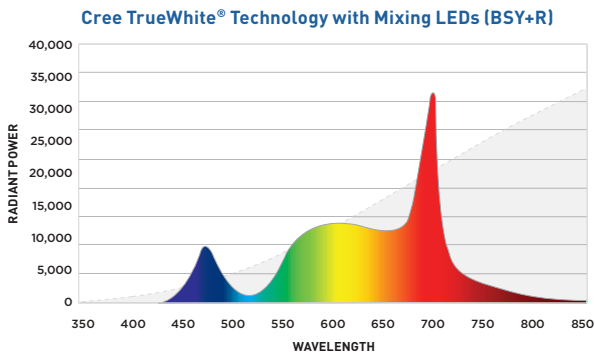

The Cree Advantage

# NANOOPTIC® TECHNOLOGY


## Over 20 Optic Choices for the Flexibility You Need

Traditional technologies offer limited choices when it comes to optical selections. Cree has changed this with our patented and highly-efficient NanoOptic® refractor technology. Our wide range of NanoOptic options provides new possibilities for highly-optimized target illumination performance and the flexibility needed for application-specific requirements. Our NanoOptic refractor system provides superior light control with:

- More lumens delivered in the target area
- Improved uniformity ratios
- Controlled high angle brightness
- Multiple optical distribution patterns to choose from

### NanoOptic® Technology Explained

The illustration below represents the LED optical fine-tuning range that Cree outdoor luminaires can provide. The gray area shows Type II short optic coverage. The short optic can be utilized to comply with more stringent light spill and high angle brightness specifications or codes by incorporating a lower main beam. The wider blue area indicates the Type II Medium optic coverage. This optic incorporates a slightly higher main beam to allow for wider and more economical pole spacing.

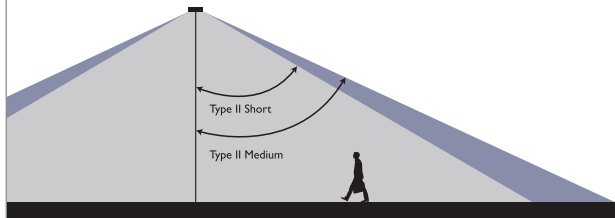

Bare LED Package




Cree® NanoOptic Refractor Control



### NanoOptic Distribution Examples

Visit [cree.com/lighting](http://cree.com/lighting) to see all available NanoOptic choices.

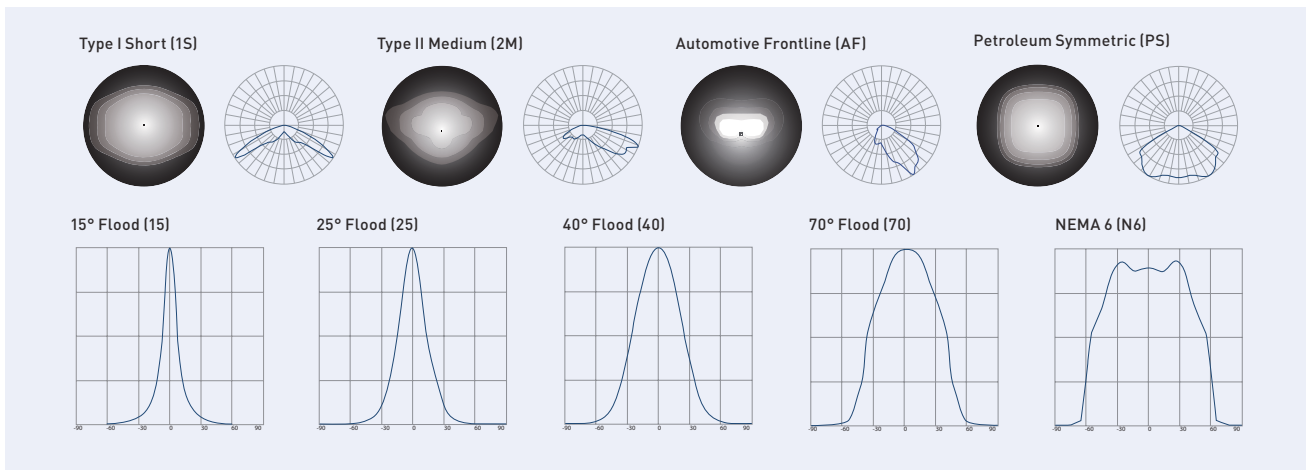

The Cree Advantage

# COLORFAST DELTAGUARD® FINISH

## Premium Protection with Proven Results

Colorfast DeltaGuard® Finish is the finest industrial-grade finish available, is exclusive to Cree exterior products and poles, and carries an industry-leading 10-year limited warranty. Each product follows an immersion process that includes six cleaning stages, eight pre-treatment stages and an epoxy e-coat before the topcoat is applied. A baked-on ultra-durable powder topcoat is the last step to a truly outstanding finish that provides:


- Ultraviolet light resistance
- Hard surfacing
- Superior adhesion
- Corrosion resistance
- Fade protection
- Multiple finish options
- Endurance tested to withstand 5,000 hours of elevated ambient salt fog conditions (ASTM Standard B117)

### Proven Results - Salt Fog Test Results

The same 3mm thickness of powder topcoat was applied to each of these four pole section samples, which were then scored and exposed to a salt fog test for 2,500 hours. The results are clear – our Colorfast DeltaGuard finish stood up to the test, proving our ability to protect your investment even in the most grueling conditions.


Steel

Aluminum

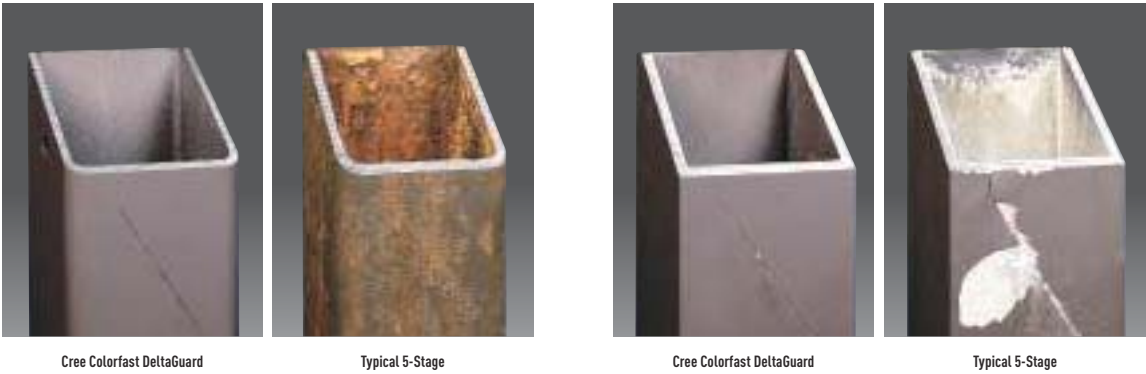

### Color Finish Options

Colorfast DeltaGuard is available in four colorfast finishes providing design freedom on top of premium protection.

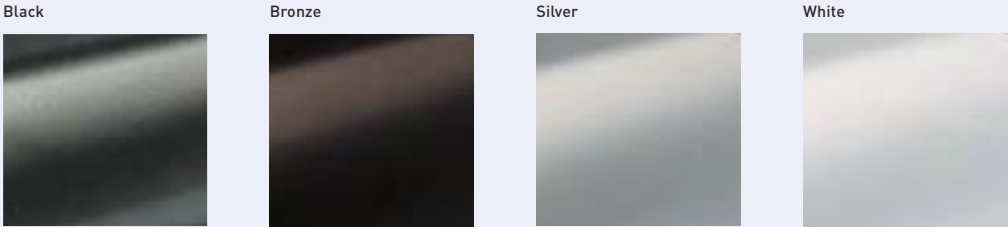

## The Cree Way


# A TOTAL SYSTEMS APPROACH

Our total systems approach is a comprehensive engineering philosophy that combines the most advanced LED sources, driver technologies, optics and form into each product. The result is highly-reliable luminaire solutions for both indoor and outdoor that reduce energy consumption, extend lifetimes and maximize illumination performance and quality.



### Advanced LED Technology

Inside every Cree® luminaire are top-quality Cree® LEDs, made from the finest materials and grown by experts in our very own labs. With over one billion hours of reliable LED operation logged, our proven track record explains why we offer the industry's broadest warranty.



### Specialized Optics

From our patented NanoOptic® refractor system to our WaveMax™ optical design, Cree luminaires feature individually optimized optics designed for both visual appeal and precise control, maximizing photometric performance, aesthetics and color mixing all at once.



### Modular Design

We do not take a one-size-fits-all approach. Rather, Cree strives to create application-specific solutions, such as our modular outdoor light engines, which can be fine-tuned to meet any illumination requirement while consuming the least amount of energy possible.



## Progressive Product Development

As technology leaders, we are continuously advancing our state-of-the-art LED lighting systems to gain the highest efficiency and quality light from our luminaires. Dynamic R&D focuses on maximizing efficiency in every part of the luminaire, while Cree world-class engineering, highly experienced manufacturing teams and overall operational excellence combine to produce our distinctive top-performing LED lighting products.



### Thermal Management

Excellent thermal management contributes to optimal illumination, reliability and longevity. From advanced heat sink technology to our vented outdoor housings, Cree® luminaires are designed to maximize cooling, making their unmatched performance and longevity possible.



### Reliable & Optimized Drivers

The drivers utilized in Cree luminaires are extremely reliable and are specifically designed to our high-efficiency standards. A variety of drive current options provide flexibility, while our integrated sensors and controls can offer total system solutions.



### Style & Performance

Cree luminaires incorporate all the critical design elements needed to deliver exceptional performance and easy installation, all without compromising style. Our modern yet low-profile designs and high quality finishes offer beautiful aesthetics to any application, indoors and out.

## The Cree Advantage

# BENEFITS AT EVERY TURN

Cree is the originator of today's LED lighting technology and is 100 percent committed to the continued advancement of solid state lighting. From growing our patented Silicon Carbide (SiC) materials, to developing the components, to manufacturing complete lighting systems, our entire portfolio benefits from Cree's unrelenting pursuit of developing the most advanced LED lighting available.



### Proven Quality & Performance

A leading innovator of LED chips, components and lighting, Cree has over a quarter century of experience in LED lighting development. As a leading vertically-integrated LED lighting company, Cree is revolutionizing the lighting industry with the development of sustainable lighting technology that provides superior lighting performance.



### Ultra-Efficient Lighting

Lighting accounts for approximately 20 percent of electricity use in both residential and commercial applications. Cree offers a complete line of indoor and outdoor LED lighting solutions that significantly reduce electricity consumption and operating costs for commercial and residential applications.



### Lifetime Energy Savings

One of the main advantages of LED lighting is reduced power consumption. Cree® LED lamps and luminaires use just a fraction of the energy required to operate traditional lighting; as energy demands rise, the cost savings and carbon reduction from upgrading to LED lighting will continue to reduce operational costs.



### Reduced Maintenance Costs

Maintenance cost savings is one of the major benefits realized when making the switch to LED lighting. Designed for extended life, Cree® LED lamps and luminaires will last much longer than conventional lighting, which equates to fewer replacements over time and less money spent on maintaining your lighting system.



### Easy Installation & Upgrading

The products found in this catalog have all been designed with ease of installation in mind. From the standard Edison bases found on the lamps to the traditional mounting options available for our troffers and outdoor products, Cree® LED lamps and luminaires can work as a direct replacement or as a perfect fit for new lighting install opportunities.



### Long-Term Financial Benefits

Cree offers some of the most energy-efficient and long-lasting LED lighting in the industry. This translates to financial savings through reduced operational costs and less money spent on maintenance due to extended product life. Depending on the application, the payback period for LED lighting typically ranges from one to three years.

## Cree Quick Ship Program

# AVAILABLE AND READY TO SHIP

The Cree Quick Ship Program is designed to help you receive your orders for our LED lighting products fast! When you need the highest quality LED lighting products, count on Cree Quick Ship to deliver items quickly.

Cree Quick Ship products are our most popular indoor and outdoor products ready to ship to you. No more waiting for these items to be built-to-order, as we target having them in-stock and ready to ship.

- Serve quick turn jobs and orders with products that are available to ship.
- Accelerate LED adoption by matching/beating incumbent technology availability.
- Increase your sales and create happy customers with fast shipping.

For more information on the Quick Ship program, including guidelines and rules, please visit:

[lighting.cree.com/resources/quickship-program](http://lighting.cree.com/resources/quickship-program)



## Industry-Leading Limited Warranty

Cree offers a standard 10-year limited warranty that covers the broadest product range in the industry. This covers nearly all Cree globally available commercial-grade indoor and outdoor fixtures. We also offer an industry-leading standard 10-year limited warranty covering our Colorfast DeltaGuard® Finish on all outdoor fixtures and poles. To learn more about the products covered under our standard warranty, please visit:

[lighting.cree.com/warranty](http://lighting.cree.com/warranty)

# INDOOR LED PRODUCTS

Cree is committed to delivering the best solutions on the market, inspired by the needs of our customers and perfected by the knowledge and expertise of our engineers. We recognize the importance of beautiful energy-efficient lighting and aspire to improve every business with uncompromising performance and payback.

## LED DOWNLIGHTS

### LR Series

LR150™ / LR200™ p.24



### LR6™ Series

LR6-LP1000 p.24



### CR Series

CR100™ / CR150™ p.28



## LED TROFFERS

### LR Series

LR22™ p.34



### CR Series Troffers

CR24™ / CR14™ / CR22™ p.36



### LE Series Light Engines

LE14™ / LE12™ p.38



### ZR Series


ZR24™ / ZR14™ / ZR24™ p.40



## LED UPGRADE SOLUTIONS

### UR Series Upgrade Kit

UR2-48™ / UR2-24™ p.44



## LED SUSPENDED AMBIENT

### LN Series

LN4™ p.48



### CS Series Linear

CS18™ / CS14™ p.50



## LED SURFACE AMBIENT

### LS Series

LS4 / LS8 p.54



### WS Series

WS4™ p.56



## LED HIGH-BAY/LOW-BAY

**CXB Series**  
CXB p.60



**Cree Edge™ Series High Output**  
Cree Edge™ HO High Bay p.62



**304 Series™**  
304 Series™ Interior p.64



**Cree Edge™ Series**  
Cree Edge™ Interior Round p.66



## LED LAMPS & ACCENTS

**MR16 Series**  
MR16 p.70



## INTELLIGENT LIGHTING SOLUTIONS

Cree SmartCast® Technology p.74

**CREE** ⇄  
SMARTCAST™ TECHNOLOGY

## INDOOR APPLICATIONS

As consumer expectations evolve, so should the environment and experiences we offer. Cree helps businesses overcome the challenges of an ever more demanding marketplace with a broad set of world-class LED fixtures that offer uncompromising performance, style and affordability.



### Architectural

Cree® interior architectural lighting is both crisp and warm. With 90+ CRI and superior color rendering, your space appears vibrant, comfortable, clean and inviting.



### Corporate Campus

For corporations planning newly-constructed or renovated campuses, Cree is the lighting product of choice for up to 80 percent energy cost savings and contributions toward LEED credits from the U.S. Green Building Council.



### Healthcare

With healthcare ranking as the second largest energy consumer in the U.S., energy cost-saving technology like Cree's efficient LED luminaires is essential to achieve Department of Energy initiatives.



### High-Bay/Low-Bay

Cree® interior high-bay lighting is the ideal source for energy-efficient illumination in large spaces and provides improved, lasting performance in cold storage facilities.



### Museum & Amusement

Enhance the illumination of your exhibits and all of your guest spaces with soft accents or dramatic highlights. Significantly reduce the need for lighting maintenance and associated labor costs.



### Convenience Store

Petroleum stations are attracting customers with improved Cree lighting that creates a safe environment with dramatically better visibility and the added benefit of tremendous energy cost savings.



### Residential

Create a comfortable, inviting experience in your home with beautiful LED lighting — better quality light and better for the environment. With normal home usage, LED lighting typically lasts more than 20 years and uses significantly less power than traditional lighting.



### Restaurant & Hospitality

Cree® luminaires are the ideal solution for multiple-location franchise installations because they offer the versatility of optical selections and upgradable modular LED lightbars to meet different lighting ordinances.



### Retail & Grocery

From a safe and inviting parking area to an appealing sales floor to a well-lit warehouse, Cree offers a complete line of LED luminaires that will enhance the atmosphere throughout your entire store.



### School & University

The U.S. Green Building Council sees school construction and renovation as a sector that has potential for tremendous energy cost savings by implementing environmental solutions. Schools and universities looking for sustainable lighting alternatives are selecting Cree.

# LED DOWNLIGHTS

Cree® downlights blend beauty and performance with the same superior light quality as traditional fixtures but at a fraction of the energy used. With a wide variety of configurations, Cree downlights are ideal for all recessed lighting applications — from new construction to retrofit and commercial to residential settings.





**LR Series (LR150™ / LR200™)**

p.24

- Utilizes Cree TrueWhite® Technology
- Active Color Management
- Minimum 90 CRI
- CCT: 3000K or 4000K
- 2000 or 3000 lumens
- Dimmable to 5% with DALI and Analog 1-10V dimmers

**LR6™ Series (LR6-LP1000)**

p.26

- Utilizes Cree TrueWhite® Technology
- Active Color Management
- Minimum 90 CRI
- CCT: 3000K or 4000K
- 1000 lumens
- Dimmable with recommended dimmers

**CR Series (CR100™)**

p.28

- Utilizes Cree TrueWhite® Technology
- Active Color Management
- Minimum 90 CRI
- CCT: 3000K or 4000K
- 630 or 680 lumens
- Shallow and deep recess options
- Dimmable with recommended dimmers

**CR Series (CR150™)**

p.30

- Utilizes Cree TrueWhite® Technology
- Active Color Management
- Minimum 90 CRI
- CCT: 3000K or 4000K
- 650, 1000 or 2000 lumens
- Dimmable with recommended Triac and DALI dimmers

## LR Series Downlights - LR150™ / LR200™



LR150™

LR200™



## Generate a true no compromise solution with high-quality white light for new construction or retrofit applications.

The LR Series (LR150™ / LR200™) LED high output downlights deliver exceptional 90+ CRI light while achieving impressive lumens per watt. This breakthrough performance is achieved by combining the high efficacy and high-quality light of Cree TrueWhite® Technology. Available in warm or cool color temperatures and features spec grade aesthetics with a polished lower reflector. They are designed to easily install in the average diameter ceiling openings, making these perfect for use as a CFL and metal halide downlight replacement in commercial new construction or retrofit applications.

### BENEFITS

- Reduced maintenance cycles
- High color quality
- Durable engineered polycarbonate housing and support cup protect LEDs and optical lens
- Integral spring clips resist heat while providing retention for flush ceiling fit

### FEATURES

- Utilizes Cree TrueWhite® Technology
- Active color management
- Standard 5-year limited warranty
- 50,000-hour rated life
- 5% dimming with recommended dimmers

### APPLICATIONS

- Healthcare, municipal, residential, commercial, restaurant & hospitality

## LR Series Downlights - LR150™ / LR200™

## Ordering Information

Example: LR150-2000L-30K-23-ADIM



| PRODUCT               | LUMEN OUTPUT                     | COLOR TEMP.                                | VOLTAGE/BASE                           | CONTROL  | OPTIONS   |
|-----------------------|----------------------------------|--|--|--|---|
| <b>LR150</b><br>150mm | <b>2000L</b><br>31W, 2000 Lumens | <b>30K</b><br>3000K<br><b>40K</b><br>4000K | <b>23</b><br>220 - 240 Volt (Standard) | <b>ADIM</b><br>Analog dimming 1-10 volts<br><b>DALI</b><br>Digital Addressable Lighting Interface system | <b>Blank</b><br>CE/CB certified<br><b>CP</b><br>CCC certified |

Example: LR200-3000L-40K-23-DALI-CP

| PRODUCT               | LUMEN OUTPUT   | COLOR TEMP.                                | VOLTAGE/BASE                           | CONTROL  | OPTIONS   |
|-----------------------|--|--|--|--|---|
| <b>LR200</b><br>200mm | <b>2000L</b><br>27W, 2000 Lumens<br><b>3000L</b><br>40W, 3000 Lumens | <b>30K</b><br>3000K<br><b>40K</b><br>4000K | <b>23</b><br>220 - 240 Volt (Standard) | <b>ADIM</b><br>Analog dimming 1-10 volts<br><b>DALI</b><br>Digital Addressable Lighting Interface system | <b>Blank</b><br>CE/CB certified<br><b>CP</b><br>CCC certified |

\*Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Dimensions
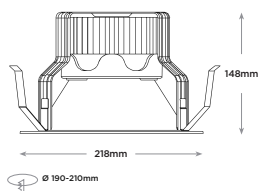
| LR150™  | LR200™  |
|---|---|
|  <p>148mm</p> <p>163mm</p> <p>Ø 150-160mm</p> |  <p>148mm</p> <p>218mm</p> <p>Ø 190-210mm</p> |

## You May Also Be Interested In:



**CR SERIES DOWNLIGHTS**  
Commercial-Grade Downlight Upgrade Solutions



**CR SERIES TROFFERS**  
High-Efficiency, Affordable Troffers

## LR6™ Series Downlights - LR6-LP1000



## Upgrade your space with industry-leading efficacy and exceptional light quality, built upon a proven LED lighting platform.

The LR6™ downlight delivers up to 1000 lumens of exceptional 90+ CRI light while achieving efficacy of 80 lumens per watt. This breakthrough performance is achieved by combining the high efficacy and high-quality light of Cree TrueWhite® Technology, allowing 90 watts of incandescent light to be replaced using only 12.5 watts. Available in a warm or neutral colour temperature with a variety of snap-in reflector options, the LR6™ fixture is designed to easily retrofit into new or existing 6" housings, for commercial or residential use.

### BENEFITS

- Up to 85 percent more efficient than incandescent
- Reduced maintenance cycles
- High colour quality
- Fits in existing 6" housings

### FEATURES

- Efficacy up to 80 LPW
- Utilizes Cree TrueWhite® Technology
- Active colour management
- Standard 5-year limited warranty
- 50,000-hour rated life
- 20% dimming with recommended dimmers

### APPLICATIONS

- Airports, municipal, school & university, corporate campus, restaurant & hospitality, retail & grocery, government

LR6-LP1000



## LR6™ Series Downlights - LR6-LP1000

## Ordering Information

Example: LR6-LP1000-230V

| PRODUCT | LUMEN OUTPUT                         | COLOUR TEMP.                             | VOLTAGE              | CONTROL                  | OPTIONS   |
|---------|--------------------------------------|--|----------------------|--------------------------|---|
| LR6     | LP1000<br>12.5W 1000 lumens - 80 LPW | 27K<br>2700 Kelvin<br>40K<br>4000 Kelvin | 230V<br>220-240 Volt | Blank<br>Dimmable to 20% | Blank<br>CE / CB Certified<br>CP<br>CCC Certification |

\*Reference CeeLighting.com for recommended dimmers

## Accessory Information

## SNAP-IN TRIMS

Snap-in Trim Kits are available in three standard colour options.



**LT6A**  
Diffuse Anodized  
Finish Trim




**LT6AW**  
Wheat Diffuse Anodized  
Finish Trim



**LT6AB**  
Black Anodized  
Finish Trim

## Dimensions

## LR6-LP1000



## You May Also Be Interested In:



**CS SERIES LINEAR**  
Commercial Linear Solutions



**CR SERIES TROFFERS**  
High-Efficiency, Affordable Troffers

## CR Series Downlights - CR100™



**Higher efficacy and longer life than compact fluorescent lamps, with the beautiful light quality that you would expect from an incandescent.**

The CR100™ LED downlight delivers up to 680 lumens of exceptional 90+ CRI light while achieving up to 62 lumens per watt. This breakthrough performance is achieved by combining the high efficacy and high-quality light of Cree TrueWhite® Technology. The CR100™ downlights are available in a variety of colour temperatures and have deep/shallow recess options, making the CR100™ perfect for use in residential and commercial applications.

## BENEFITS

- Up to 85 percent more efficient than incandescent
- Reduced maintenance cycles
- High colour quality

## FEATURES

- Utilizes Cree TrueWhite® Technology
- Active colour management
- Standard 5-year limited warranty
- 50,000-hour rated life
- Dimmable with recommended Triac dimmers
- 5° Shield Angle (680L) and 20° Shield Angle (DR630L)

CR100™



CR100™ Deep Recess



## CR Series Downlights - CR100™

## Ordering Information

Example: **CR100-680L-30K-23**

| PRODUCT               | LUMEN OUTPUT  | COLOR TEMP.                                | CONTROL                       | VOLTAGE                                | OPTIONS   |
|-----------------------|---|--|-------------------------------|--|---|
| <b>CR100</b><br>100mm | <b>680L</b><br>11W, 680 Lumens<br><b>DR630L</b><br>Deep Recessed<br>11W, 630 Lumens | <b>30K</b><br>3000K<br><b>40K</b><br>4000K | <b>Blank</b><br>Triac Dimming | <b>23</b><br>220 - 240 Volt (Standard) | <b>Blank</b><br>CE/CB certified<br><b>CP</b><br>CCC certified |

\*Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Dimensions

| CR100-680L | CR100-DR630L |
|------------|--------------|
|            |              |

## You May Also Be Interested In:



**CR SERIES - CR150™**  
Commercial-Grade Downlight  
Upgrade Solutions



**LR SERIES DOWNLIGHTS**  
Commercial-Grade Downlight  
Upgrade Solutions



**CR SERIES TROFFERS**  
High-Efficiency, Affordable Troffers

## CR Series Downlights - CR150™



CR150™



## CR 150™ downlight outperforms traditional fluorescent lighting with rapid payback, longer life and improved colour quality.

The CR150™ LED downlights family delivers up to 2000 lumens with exceptional 90+ CRI at up to 74 lumens per watt. Using almost just one-fourth of the energy used by comparable incandescent lamps, the CR150™ family is a direct replacement for most six-inch recessed downlights. This product is ideal for use in many residential and commercial applications.

### BENEFITS

- Up to 85 percent more efficient than incandescent
- Reduced maintenance cycles
- High colour quality
- Fits in existing 6" housings

### FEATURES

- Efficacy up to 74 LPW
- Utilizes Cree TrueWhite® Technology
- Active Color Management
- Standard 5-year limited warranty
- 50,000-hour rated life
- 5% dimming by recommended dimmers

### APPLICATIONS

- Healthcare, municipal, residential, restaurant & hospitality, auto dealership



## CR Series Downlights - CR150™

## Ordering Information

Example: CR150-1000L-30K-23-CP

| PRODUCT               | LUMEN OUTPUT  | COLOR TEMP.                                | CONTROL  | VOLTAGE                                | OPTIONS   |
|-----------------------|---|--|--|--|---|
| <b>CR150</b><br>150mm | <b>650L</b><br>9.5W, 650 Lumens<br><b>1000L</b><br>14W, 1000 Lumens<br><b>2000L</b><br>27W, 2000 Lumens | <b>30K</b><br>3000K<br><b>40K</b><br>4000K | <b>Blank</b><br>Triac dimming to 5%<br><b>DALI</b><br>Digital Addressable<br>Interface Lighting system | <b>23</b><br>220 - 240 Volt (Standard) | <b>Blank</b><br>CE/CB certified<br><b>CP</b><br>CCC certified |

\*Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Accessory Information

## SNAP-IN TRIMS

Snap-in Trim Kits are available in three standard color options. (for use with CR150 only)



**CT6A**  
Diffuse Finish  
Reflector



**CT6AW**  
Wheat Diffuse Finish  
Reflector




**CT6AB**  
Black Diffuse Finish  
Reflector

Square Trim Adaptor

8" Trim Adaptor

## Dimensions

CR150



## You May Also Be Interested In:



**CR SERIES DOWNLIGHTS**  
Commercial-Grade Downlight  
Upgrade Solutions



**LR SERIES DOWNLIGHTS**  
Commercial-Grade Downlight  
Upgrade Solutions



**CR SERIES TROFFERS**  
High-Efficiency, Affordable Troffers

# LED TROFFERS

Cree® architectural and commercial specification-grade troffers demonstrate technical ingenuity at its finest, delivering a superior mix of performance and payback, proving that energy-efficient, high-quality lighting doesn't have to come at a premium. And with unmatched longevity and color consistency, all backed by an industry-best luminaire limited warranty, they deliver a true no-compromise solution.



**LR Series Troffers**

p.34

- Utilizes Cree TrueWhite® Technology
- Minimum 90 CRI
- CCT: 3000K or 4000K
- 3400 lumens
- 0-10V dimming to 5%

**CR Series Troffers - CR14™ / CR22™ / CR24™**

p.36

- Utilizes Cree TrueWhite® Technology
- Active Color Management
- Room-Side Heat Sink
- Minimum 90 CRI
- CCT: 3000K or 4000K
- 2000 to 5000 lumens options
- 1-10V or DALI dimming to 5%

**LE Series Light Engine - LE12 / LE14**

p.38

- Utilizes Cree TrueWhite® Technology
- Active Color Management
- Room-Side Heat Sink
- Minimum 90 CRI
- CCT: 3000K or 4000K
- 2000 to 5000 lumens options
- 1-10V or DALI dimming to 5%

**ZR Series Troffers**

p.40

- Utilizes Cree TrueWhite® Technology
- Minimum 90 CRI
- CCT: 3500K or 4000K
- 3200 or 4000 lumen options
- 0-10V dimming to 5%

## LR Series Troffers



LR22™



## A TROFFER DESIGN SO QUIET YOUR CEILINGS WILL WHISPER ABOUT IT FOR DECADES.

The architecturally designed recessed flat panel of the LR22™ LED troffer blends seamlessly into any ceiling and offers soft, smooth, fully-luminous light, creating a quiet ceiling that keeps spaces bright and vibrant. The innovatively thin 3.6" depth easily accommodates narrow plenums and is ideal for both retrofit and new construction. The LR22 LED troffer delivers 3400 lumens of exceptional 90 CRI light while achieving an efficacious 100 lumens per watt. This breakthrough performance is achieved by combining the high efficacy and high-quality light of Cree TrueWhite® Technology. Delivering 0-10V continuous dimming on every luminaire allows for further energy savings when utilized for even faster payback.

### BENEFITS

- Beautifully soft, balanced light without the glare
- Up to 40% energy cost savings
- Payback in less than 2.5 years
- Eliminates up to 6 maintenance cycles
- DLC qualified

### FEATURES

- Utilizes Cree TrueWhite® Technology
- Ultra-thin 3.6" form factor
- 100 LPW
- 10-year limited warranty
- Continuous dimming to 5% with 0-10V controls
- Designed to last for 75,000 hours L70 @ 25°C
- Recessed mounting

### APPLICATIONS

- Airport, corporate campus, healthcare, municipal, restaurant, retail & grocery, school & university, government

## LR Series Troffers


## Ordering Information

Example: LR22-34L-40K-23-ADIM

| PRODUCT | LUMEN OUTPUT                  | COLOUR TEMP.    | VOLTAGE               | CONTROL   |
|---------|-------------------------------|-----------------|-----------------------|---|
| LR22    | 32L 34W 3300 lumens – 97 LPW  | 30K 3000 Kelvin | 23 220-240V(Standard) | <b>ADIM</b><br>1-10V Dimming to 5%<br><b>DALI</b><br>DALI Dimming to 5% |
|         | 34L 34W 3400 lumens – 100 LPW | 40K 4000 Kelvin |                       |   |

## Dimensions

## LR22™ TROFFER

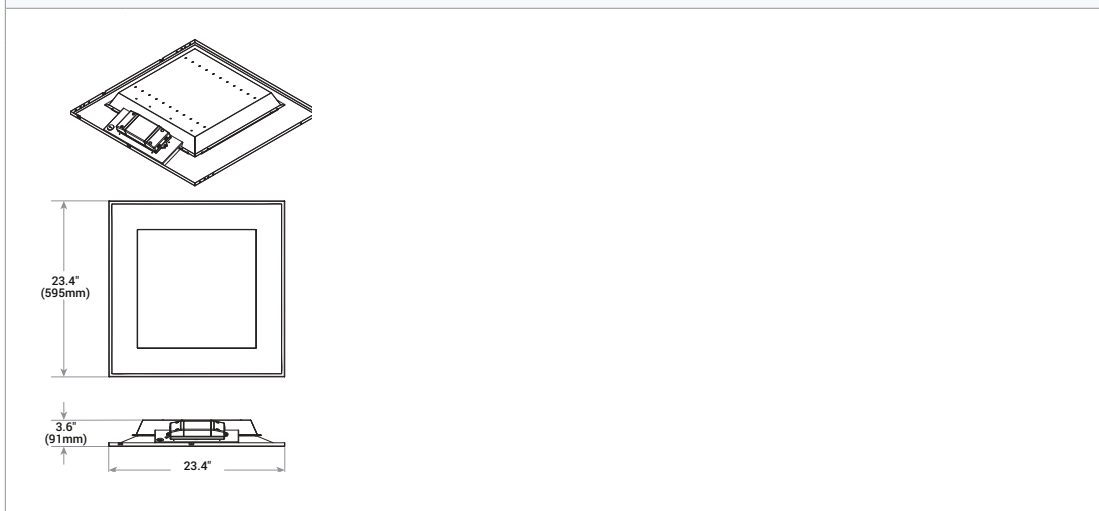

## You May Also Be Interested In:



**CR SERIES TROFFERS**  
 High-Efficiency, Affordable Troffers



**CS SERIES LINEAR**  
 Commercial Linear Solutions

## CR Series Troffers



## Redefining commercial lighting by offering a no-compromise alternative when upgrading over fluorescent lighting.

The CR Series architectural LED Troffers deliver up to 5000 lumens of exceptional 90+ CRO light while achieving up to 110 lumens per watt. This breakthrough performance is achieved by combining high efficacy and high-quality of Cree TrueWhite® Technology with a unique thermal management approach. The CR Series troffers are available in a variety of colour temperatures and have 1-10V or DALI dimming options. Their compact, lightweight design easily accommodates recessed, surface mount or suspended installations, making the CR Series troffers perfect for use in commercial new construction or retrofit applications.

### BENEFITS

- Significant energy savings
- Years of near-maintenance free service
- Superior colour accuracy and consistency
- Easily designed into any space; a variety of lumens, colour temperatures and control options

### FEATURES

- Efficacy up to 120 LPW
- Utilizes Cree TrueWhite® Technology
- Active colour management
- Standard 10-year limited warranty
- Excellent Thermal Management by Room-Side Heat Sink Design

### APPLICATIONS

- Airport, corporate campus, healthcare, municipal, restaurant & hospitality, retail & grocery, school & university, government

CR24™



CR14™



CR22™



## CR Series Troffers

## Ordering Information

Example: CR24-40L-40K-23-ADIM

| PRODUCT | LUMEN OUTPUT    | COLOUR TEMP.                                 | VOLTAGE                          | CONTROL   | OPTIONS   |
|---------|-----------------|--|----------------------------------|---|---|
| CR14    | 22L 2200 Lumens | 30K<br>3000 Kelvin<br><br>40K<br>4000 Kelvin | 23<br>220-240 Volt<br>(Standard) | ADIM<br>1-10V Dimming to 5%<br><br>DALI<br>DALI Dimming to 5%   | Blank<br>CE/CB Certified<br><br>CP<br>CCC Certified |
|         | 40L 4000 Lumens |  |                                  |   |   |
| CR22    | 20L 2000 Lumens | 30K<br>3000 Kelvin<br><br>40K<br>4000 Kelvin | 23<br>220-240 Volt<br>(Standard) | ADIM<br>1-10V Dimming to 5%<br><br>DALI**<br>DALI Dimming to 5% | Blank<br>CE/CB Certified<br><br>CP<br>CCC Certified |
|         | 32L 3200 Lumens |  |                                  |   |   |
| CR24    | 22L 2200 Lumens | 30K<br>3000 Kelvin<br><br>40K<br>4000 Kelvin | 23<br>220-240 Volt<br>(Standard) | ADIM<br>1-10V Dimming to 5%<br><br>DALI<br>DALI Dimming to 5%   | Blank<br>CE/CB Certified<br><br>CP<br>CCC Certified |
|         | 40L 4000 Lumens |  |                                  |   |   |

Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Dimensions

| CR24™ | CR22™ | CR14™ |
|-------|-------|-------|
|       |       |       |

## You May Also Be Interested In:



**LE SERIES**  
Light Engine Kits to Match the CR Series Troffer



**CS SERIES LINEAR**  
Commercial Linear Solutions

## LE Series Light Engines



LE14



LE12



Note: Use of Expanded Junction Box will expand the depth to 6.67" and Emergency Backup will expand the depth to 6.30".

## Convert existing fluorescent troffers to efficient LED technology while delivering the same high-quality light and energy savings as the CR Series troffers.

The LE Series Light Engine deliver up to 5000 lumens of exceptional 90+ CRO light while achieving up to 110 lumens per watt. This breakthrough performance is achieved by combining high efficacy and high-quality of Cree TrueWhite® Technology with a unique thermal management approach. The LE Series is available in a variety of colour temperatures and has 1-10V or DALI dimming options. Its compact, lightweight design easily accommodates recessed, surface mount or suspended installations, making the LE Series Light Engine perfect for use in commercial new construction or retrofit applications.

### BENEFITS

- Significant energy savings
- Years of near-maintenance free service
- Superior colour accuracy and consistency
- Easily designed into any space; a variety of lumens, colour temperatures and control options

### FEATURES

- Efficacy up to 120 LPW
- Utilizes Cree TrueWhite® Technology
- Active colour management
- Standard 10-year limited warranty
- Excellent Thermal Management by Room-Side Heat Sink Design

### APPLICATIONS

- Airport, corporate campus, healthcare, municipal, restaurant & hospitality, retail & grocery, school & university, government



## LE Series Light Engines

## Ordering Information

Example: **LE12-32L-40K-23-ADIM**

| PRODUCT                       | LUMEN OUTPUT           | COLOUR TEMP.   | VOLTAGE                              | CONTROL  |
|-------------------------------|------------------------|--|--------------------------------------|--|
| <b>LE12</b><br>543mm x 270mm  | <b>20L</b> 2000 Lumens | <b>30K</b><br>3000 Kelvin<br><br><b>40K</b><br>4000 Kelvin | <b>23</b><br>220-240 Volt (Standard) | <b>ADIM</b><br>1-10V Dimming to 5%<br><b>DALI*</b><br>DALI Dimming to 5% |
|                               | <b>32L</b> 3200 Lumens |  |                                      |  |
| <b>LE14</b><br>1083mm x 270mm | <b>22L</b> 2200 Lumens | <b>30K</b><br>3000 Kelvin<br><br><b>40K</b><br>4000 Kelvin | <b>23</b><br>220-240 Volt (Standard) | <b>ADIM</b><br>1-10V Dimming to 5%<br><b>DALI</b><br>DALI Dimming to 5%  |
|                               | <b>40L</b> 4000 Lumens |  |                                      |  |

See [www.cree.com/lighting/products/warranty/terms](http://www.cree.com/lighting/products/warranty/terms).Reference [www.cree.com/lighting](http://www.cree.com/lighting) for recommended dimming control options.  
3000K HE model is 36W (110 LPW), 4000K HE model is 38W (105 LPW)

## Accessory Information

## SURFACE MOUNT KITS

For installing CR Series troffers onto hard ceilings, where above-ceiling installation isn't possible. Surface Mount Kits come in a standard white colour.

**SMK-LE-L'**

Surface Mount Kit for CR Series 1'x4' Light Engines 2200, 4000 and 5000 Lumens

**SMK-LE-S'**

Surface Mount Kit for CR Series 1'x2' Light Engines 2000 and 3200 Lumens

**SMK-LE-EC**

End Caps (2 pack, required for all SMK installations, must be ordered separately)


**SMK-LE-JP**

Joiner Plate (optional for continuous row installation)

1. Included in EB14SMK option.

## TROFFER UPGRADE KIT

The CR24™ Upkit is an accessory that converts any Cree CR series light engine to a complete upgrade kit for existing 2'x4' fluorescent luminaires. It installs in most fluorescent troffers and parabolic troffers that have a minimum depth of 3 1/8". Test install prior to ordering project quantities. Not compatible with air handling troffers or EB14, EB14SMK options.

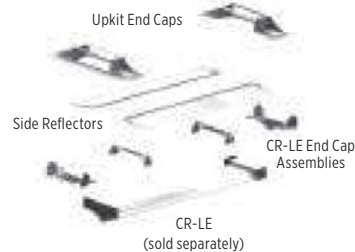**CR24-UPKIT-1PK - 1 Pack****CR24-UPKIT-4PK - 4 Pack**

## OTHER ACCESSORIES

**PW-18/4-06-9T/SS-CR**

(Power Whip)

**ACS-18/4-72-PD8-JB**

(Adjustable Cable with Power)

**ACS-72-PD8-JB**

(Adjustable Cable)

## You May Also Be Interested In:

**CR SERIES TROFFERS**  
High-Efficiency, Affordable Troffers**CS SERIES LINEAR**  
Commercial Linear Solutions

## ZR Series Troffers



ZR24™



ZR14™



ZR22™



## EXCEPTIONAL ENERGY PERFORMANCE AT AN UNEXPECTED PRICE.

The Cree ZR Series LED troffer delivers a broad portfolio of class-leading efficiency and better light performance in an inspired, ultra-slim, sleek package – all at a remarkably affordable price. The ZR Series puts an end to energy sapping, poor quality troffer illumination with up to 130 lumens per watt, gloss or matte finish, dimming to 5%, and twice the warranty of the nearest competitors.

### BENEFITS

- Up to 130 LPW for maximum energy savings – up to 60% less than similar fluorescent solutions
- Available in gloss or matte finish for an array of versatile design and aesthetic options
- Remarkably priced for a typical payback of less than two years
- Twice the warranty of the nearest competition
- Choose between 80+ and 90 CRI to enhance the look of any space
- Ultra-thin 3.9 height and lightweight design
- Cree SmartCast® Technology or continuous 0-10V

### FEATURES

- CRI: ZR FD Series – 80+ CRI, ZR Series – 90 CRI
- Efficacy: 90 - 130 LPW
- Delivered Light Output: 3,200, 4000 or 5,000\* lumens
- CCT: 3500K, 4000K
- Input Power: 25 to 45 watts
- Input Voltage: 120-277 or 347 VAC\*\*  
[\*\*Only available on ZR Series 90 CRI product]
- 0-10V dimming to 5% or available with Cree SmartCast® Technology
- Available with Cree TrueWhite® Technology
- Mounting: Recessed

\*50L in 80+ CRI only

### APPLICATIONS

- Use in new construction or retrofit applications
- Environments where specification grade requirements meet limited budgets
- Ideal for healthcare, education, office and pharmaceutical applications

## ZR Series Troffers

## Ordering Information

Example: ZR22-32L-35K-10V

| PRODUCT                   | LUMEN OUTPUT   | COLOR TEMP.  | VOLTAGE   | CONTROL   | OPTIONS  |
|---------------------------|--|--|---|---|--|
| <b>ZR14</b><br>1x4 Lay-in | <b>40L</b> 44W 4000 Lumens - 90 CRI, 90 LPW  | <b>35K</b> 3500K<br><b>40K</b> 4000K                     | <b>Blank</b> 120-277 Volt<br><b>34</b> 347 Volt | <b>10V</b> 0-10V dimming to 5%<br><b>CMA</b> Integral motion and ambient sensors and wireless communication | <b>EB14**</b> Emergency Backup<br>- 1,400 lumen<br>- Available on US versions only<br><b>FD***</b> - Must order when 50L is selected<br>- 80 CRI |
| <b>ZR22</b><br>2x2 Lay-in | <b>32L</b> 35W 3200 Lumens - 90 CRI, 90 LPW  | <b>35K</b> 3500K<br><b>40K</b> 4000K                     |   |   |  |
| <b>ZR24</b><br>2x4 Lay-in | <b>40L</b> 44W 4000 Lumens - 90 CRI, 90 LPW<br><b>50L**</b> 45W 5000 Lumens - 80+ CRI, 111 LPW | <b>35K</b> 3500K<br><b>40K</b> 4000K<br><b>50K</b> 5000K |   |   |  |

Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

\*\*SmartCast not available in 50L

\*\*\*Only in 50L Types

## Ordering Information for FD Series

Example: ZR22M-32L-35K-10V-FD

| PRODUCT                    | LUMEN OUTPUT   | COLOR TEMP.                          | VOLTAGE                   | CONTROL                        | CRI               | OPTIONS   |
|----------------------------|--|--------------------------------------|---------------------------|--------------------------------|-------------------|---|
| <b>ZR14M</b><br>1x4 Lay-in | <b>32L</b> 25W 3250 Lumens - 80+ CRI, 130 LPW<br><b>40L</b> 30W 4000 Lumens - 80+ CRI, 130 LPW | <b>35K</b> 3500K<br><b>40K</b> 4000K | <b>Blank</b> 120-277 Volt | <b>10V</b> 0-10V dimming to 5% | <b>FD</b> 80+ CRI | <b>EB14**</b> Emergency Backup<br>- 1,400 lumens<br>- Available on US versions only<br>- Provides 90 minutes of emergency operation |
| <b>ZR22M</b><br>2x2 Lay-in |  |                                      |                           |                                |                   |   |
| <b>ZR24M</b><br>2x4 Lay-in |  |                                      |                           |                                |                   |   |

Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Dimensions

| ZR14™                        | ZR22™ | ZR24™ | SMK-ZR24   | SMK-ZR14   | SMK-ZR22   |
|------------------------------|-------|-------|--|--|--|
|                              |       |       | L 48.0" (1219mm) x<br>W 24.2" (615mm) x H 5.5" (140mm) | L 48.0" (1219mm) x<br>W 12.2" (310mm) x H 5.5" (140mm) | L 24.0" (610mm) x W 24.2" (615mm) x H 5.5" (140mm) |
| Weight: Max. 15 lbs. (6.8kg) |       |       |  |  |  |

## Accessory Information

| DRYWALL GRID ADAPTOR                | SURFACE MOUNT KIT  | 6' FLEXIBLE POWER WHIP | SMARTCAST® TECHNOLOGY ACCESSORIES  |
|-------------------------------------|--|------------------------|--|
| DGA14-WHT<br>DGA22-WHT<br>DGA24-WHT | SMK ZR24<br>- ZR24™ LED Troffer Compatible<br>SMK ZR14<br>- ZR14™ LED Troffer Compatible<br>SMK ZR22<br>- ZR22™ LED Troffer Compatible | PW-18/4-06-9T-SS       | Cree SmartCast® Technology Configuration Tool* <b>CCT-CWC-1</b><br>- One required per project when CMA control is selected<br>Cree SmartCast® Technology Face Plates**<br><b>CFP-1-WH</b><br>- Matching Cree face plate, 1-gang, white<br><b>CFP-2-WH</b><br>- Matching Cree face plate, 2-gang, white<br><b>CFP-3-WH</b><br>- Matching Cree face plate, 3-gang, white<br>Cree SmartCast® Technology Wireless Dimmer** <b>CWD-CWC-WH</b><br>Cree SmartCast® Technology Wireless Switch** <b>CWS-CWC-WH</b> |
|                                     |  |                        | *Refer to the Configuration Tool spec sheet for more details<br>** Refer to the Wireless Dimmer SmartCast Control spec sheet for more details  |

## You May Also Be Interested In:



**CR SERIES DOWNLIGHTS**  
Commercial-Grade Downlight Upgrade Solutions



**LR SERIES**  
Commercial-Grade Linear Solutions



**LR SERIES DOWNLIGHTS**  
Effective, Efficient LED Retrofit Downlights

## LED UPGRADE SOLUTIONS

Cree® LED upgrade solutions give customers the ability to maintain the existing aesthetic of a fluorescent fixture, but take advantage of the greater energy efficiency and long lifespan of LED lights. The unique design features found in Cree® products facilitate a rapid and safe retrofit, allowing for an immediate payback.






### UR Series LED Upgrade Kit

p.44

- 80 CRI
- CCT: 3500K or 4000K
- 3600 lumens for 2' lightbar kit
- 4500 lumens for 4' lightbar kit
- Step level to 50% or 0-10V dimming to 5%
- Available in 2 or 3 lamp options
- Up to 102 LPW

## UR Series LED Retrofit Kit

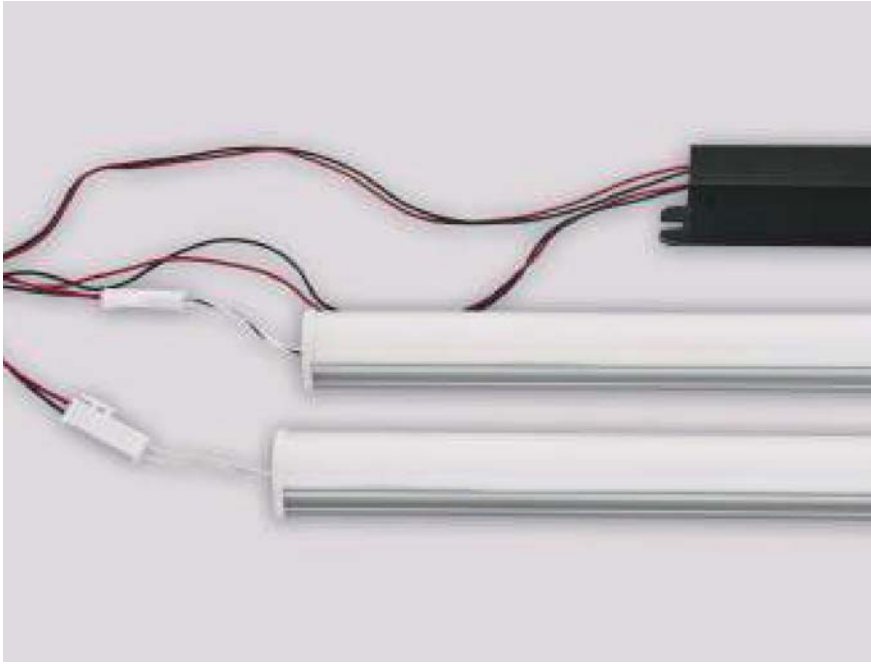

UR2-48™



UR2-24™



## A BREAKTHROUGH IN DESIGN FOR IMPRESSIVELY FAST RETROFITTING.

The UR Series LED Upgrade Kit delivers from 3600 to 4500 lumens of 80 CRI light while achieving up to 102 lumens per watt. The kit is available in 2' or 4' lengths equipped with an LED driver, 2 or 3 lightbars and specially designed mounting hardware to expedite installation. The UR Series works with nearly all industry-standard 2' and 4' fixtures in various optical configurations: prismatic, parabolic, volumetric, surface wrap, etc. The energy-efficient UR Series delivers 50,000 hours of lighting for worry-free maintenance.

### BENEFITS

- Non-disruptive, easy-installation
- Broad range of applications
- Significant energy savings
- Years of near-maintenance free service
- UL 1598C (retrofit) certified

### FEATURES

- 80 CRI
- Efficacy up to 102 LPW at source level
- Step level to 50% or 0-10V dimming to 5%
- 7 year limited warranty
- 50,000-hour rated life
- Emergency backup options

### APPLICATIONS

- Airport, corporate campus, healthcare, municipal, restaurant & hospitality, retail & grocery, school & university, government

## UR Series LED Retrofit Kit

## Ordering Information - Lightbar (Driver must be ordered separately)

Example: UR-24-35K-FD-LB-2

| SERIES | LENGTH | COLOR TEMP.                  | OPTIONS      | LIGHTBAR       | NUMBER OF LIGHTBARS    |
|--------|--------|------------------------------|--------------|----------------|------------------------|
| UR     | 24"    | 35K<br>3500K<br>40K<br>4000K | FD<br>80 CRI | LB<br>Lightbar | 2 2 Lightbar Kit       |
|        | 48"    |                              |              |                | 3 3 Lightbar Kit       |
|        |        |                              |              |                | 6 6 Lightbar Bulk Pack |

## Ordering Information - Driver (Lightbar must be ordered separately)

Example: UR2-24-36L-10V-FD-DR

| PRODUCT           | LENGTH | LUMEN OUTPUT                         | VOLTAGE  | CONTROL                    | OPTIONS | DRIVER    |
|-------------------|--------|--------------------------------------|--|----------------------------|---------|-----------|
| UR2<br>2 Lightbar | 24"    | 36L<br>36W, 3600 lumens -<br>100 LPW | Blank<br>120-277 Volt<br>(Standard)                                      | S<br>Step dimming to 50%   | FD      | DR Driver |
| UR3<br>3 Lightbar | 48"    | 45L<br>44W, 4500 lumens -<br>102 LPW | 34<br>347 Volt (Optional)<br>- Available with 10V<br>control option only | 10V<br>0-10V dimming to 5% |         |           |

Fully assembled kit is composed of two components that must be ordered separately. Example: Lightbar: UR 24 35K FD LB 2 + Driver: UR2 24 36L 10V FD DR  
Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Included in Kit

## UR2-24" / UR3-24"

- (2 or 3) 2' Lightbars
- (1) LED Driver
- (4) or (6) Mounting Clips
- (8) or (12) Self-Tapping Screws
- (1) Installation Instructions
- (1) UL1598C Certification Label

## UR2-48" / UR3-48"

- (2 or 3) 4' Lightbars
- (1) LED Driver
- (6) or (9) Mounting Clips
- (8) or (12) Self-Tapping Screws
- (1) Installation Instructions
- (1) UL1598C Certification Label

## You May Also Be Interested In:



**CS SERIES LINEAR**  
Commercial Linear Solutions



**CR SERIES - CR150™**  
Commercial-Grade Downlight  
Upgrade Solutions

## LED SUSPENDED AMBIENT

Cree's suspended ambient indirect/direct luminaires give architects an adaptable and supremely high-functioning light system with a super-modern, low-profile look at an appealing price point.







### LN Series

p.48

- Utilizes Cree WaveMax™ Technology
- Utilizes Cree TrueWhite® Technology
- 115 LPW
- 90+ CRI
- CCT: 3500K or 4000K
- 3400 lumens (60% uplight, 40% downlight)
- 0-10V continuous dimming to 5% (standard) or optional Cree SmartCast® Technology



### CS Series

p.50

- Utilizes Cree TrueWhite® Technology
- Minimum 90 CRI
- CCT: 3500K or 4000K
- Lumen packages available from 2200 to 8000 lumens
- Available with Cree SmartCast® Technology to 10% or 0-10V dimming to 5%

## LN Series Suspended Ambient



LN4™



## SIMPLY BEAUTIFUL LIGHT.

With its stunning swept-wing design and breakthrough WaveMax™ Technology, the Cree LN Series pendant luminaire creates beautifully quiet light with game-changing affordability. The LN Series features an architectural, sleek design with an indirect/direct lighting system that delivers superior ceiling uniformity and creates a comfortable visual environment. The LN4™ suspended ambient luminaire delivers up to 115 lumens per watt of Cree TrueWhite® Technology 90+ CRI illumination and is available with up to 3700 lumens in both 3500K and 4000K color temperatures. The LN Series offers standard 0-10V dimming as well as the option for Cree SmartCast® Technology, Cree's intelligent light solution, that provides a combination of extreme energy productivity and a more personalized light experience that's so intuitive and simple, it just works.

### BENEFITS

- Sleek and elegant architectural design
- More uniform ceiling and task illumination
- Up to 90% optical efficiency and precise optical control
- Exceptionally low ceiling contrast ratio and excellent spacing of 16+ feet between fixtures
- Unique modular light engine and optional SmartCast® Technology controls simplify design and installation
- Up to 136 feet of continuous rows with one power feed
- 0-10V or optional SmartCast® Technology dimming control for increased energy savings

### FEATURES

- Utilizes Cree TrueWhite® Technology and WaveMax™ Technology
- Efficacy: Up to 115 LPW
- Delivered Light Output: Up to 3700 lumens (60% uplight, 40% downlight)
- CRI: 90
- CCT: 3500K or 4000K
- 0-10V continuous dimming to 5% (standard) or optional Cree SmartCast® Technology

### APPLICATIONS

- Grocery, industrial, education, office, retail

## LN Series Suspended Ambient

## Ordering Information


Example: LN4-34L-35K-10V

| PRODUCT | LUMEN OUTPUT                  | COLOR TEMP.            | VOLTAGE        | CONTROL   |
|---------|-------------------------------|------------------------|----------------|---|
| LN4™    | 34L 30W 3400 Lumens - 115 LPW | 35K 3500K<br>40K 4000K | Blank 120-277V | 10V 0-10V dimming to 5%<br>CMA Cree SmartCast® Technology - Controls ready with integral motion and ambient sensors |

\*Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Dimensions

## LN4™

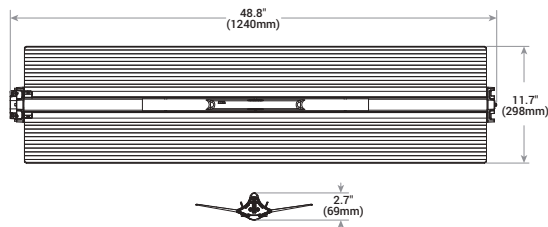

## Accessory Information

## FIELD-INSTALLED

## Mounting Hardware

## LN-EC

- Set of End Caps, one with power feed, one without (one needed per power feed)

## LN-CK-5-AC

- Canopy Kit with Aircraft Cable and Power Feed

## LN-CK-0-AC

- Canopy Kit with Aircraft Cable, no Power Feed

## Emergency Options

## Inverter

## ELI-125W (powers up to 4 luminaires)

- Emergency 125W inverter (Ceiling Installation)

## Generator

## EL-SR-120

- Emergency Relay, 120V

## EL-SR-277

- Emergency Relay, 277V

## Luminaires w/Cree SmartCast® Technology

## Cree SmartCast® Technology Configuration Tool

## CCT-CWC-1

- One required per project when CMA control is selected

## Cree SmartCast® Technology Face Plates

## CFP-1-WH

- Matching Cree face plate, 1-gang, white

## CFP-2-WH

- Matching Cree face plate, 2-gang, white

## CFP-3-WH

- Matching Cree face plate, 3-gang, white

## Cree SmartCast® Technology Wireless Dimmer

## CWD-CWC-WH

## Cree SmartCast® Technology Wireless Switch

## CWS-CWC-WH

## You May Also Be Interested In:



## CR SERIES TROFFERS

High-Efficiency, Affordable Troffers



## LR SERIES DOWNLIGHTS

Commercial-Upgrade Downlight Solutions



## IG SERIES

LED Parking Garage Luminaire

## CS Series Linear



CS18™



CS14™



## HIGHER CRI, BETTER ENERGY SAVINGS, LONGER LIFE AND BROADER COLOR RENDERING.

The CS Series High/Low-Bay fixture brings an extraordinary combination of performance, aesthetics, optimal light distribution and affordability to grocery, retail showrooms and light industrial applications. With higher CRI, better energy savings, longer life and broader color rendering than traditional fluorescent lamps, the CS Series' breakthrough design runs cooler, providing significant boosts to lifetime efficacy and color consistency. The CS Series is available with innovative SmartCast® Technology, Cree's intelligent light solution, providing a combination of extreme energy productivity and a more personalized light experience that's so intuitive and simple, it just works.

### BENEFITS

- Lightweight intuitive design minimizes installation time
- Virtually eliminates costly high-ceiling maintenance
- Beautiful light quality and stylish design bring architectural appeal to any space
- Integral through-wiring, tool-less electrical access and quick connection features for quick installation
- 90+ CRI renders colors beautifully and consistently
- With SmartCast® Technology, provides a code-compliant solution delivering exceptional energy efficiency and better light

### FEATURES

- Available with Cree SmartCast® Technology
- Utilizes Cree TrueWhite® Technology
- CRI: 90
- Delivered Light Output: 2200 to 8000 lumens
- Efficacy up to 115 LPW
- CCT: 3500K 4000K
- Input Power: 47 to 75 watts
- Input Voltage: 120-277 VAC
- Dimming: 0-10V dimming to 5%

### APPLICATIONS

- Retail, education, office, warehouse, light industrial, low-bay lighting

## CS Series Linear

## Ordering Information

Example: CS18-80L HE-35K-10V

| PRODUCT            | LUMEN OUTPUT | COLOR TEMP.           | VOLTAGE        | CONTROL   |
|--------------------|--------------|-----------------------|----------------|---|
| CS14<br>1x4 Linear | 22L          | 2200 Lumens - 100 LPW | Blank 120-277V | 10V<br>CMA**<br>0-10V Dimming<br>Controls ready with integral motion and ambient sensors. Compatible with CM-CWC-1 (Cree SmartCast® Technology wireless control module [factory installed]) |
|                    | 38L          | 3800 Lumens - 100 LPW |                |   |
|                    | 40LHE        | 4000 Lumens - 115 LPW |                |   |
| CS18<br>1x8 Linear | 44L          | 4400 Lumens - 100 LPW | Blank 120-277V | 10V<br>CMA**<br>0-10V Dimming<br>Controls ready with integral motion and ambient sensors. Compatible with CM-CWC-1 (Cree SmartCast® Technology wireless control module [factory installed]) |
|                    | 75L          | 7500 Lumens - 100 LPW |                |   |
|                    | 80LHE        | 8000 Lumens - 115 LPW |                |   |

\*Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

\*\*CMA not available with 22L or 44L lumen packages

## Accessory Information

## FIELD-INSTALLED

## TMM

**Metal Tong Hanger (Pair)**  
- Recommended for surface mount

**AC5-48-Q14B-TB**  
Adjustable Cable Support Kits

**AC2-48-Q14B-TB**  
Adjustable Cable Support Kits

**AC-144-Q14B-LP**  
Adjustable Loop Cable Kits

## AC5-18/5-48-Q14B-JB

Adjustable Power Feeds with Cable Support Canopy Kits

## AC5-12/3-48-Q14B-JB

Adjustable Power Feeds with Cable Support Canopy Kits

## PC5-18/5-24-JB

Adjustable Power Feed Canopy Cable Kits


## PC5-12/3-24-JB

Adjustable Power Feed Canopy Cable Kits

## Dimensions

## CS18™ LINEAR LUMINAIRE

## CS14™ LINEAR LUMINAIRE



## You May Also Be Interested In:



**ZR SERIES TROFFERS**  
High-Efficiency, Affordable Troffers



**LS SERIES**  
Commercial-Grade Linear Solutions



**CXB SERIES**  
LED High-Bay Luminaire

# LED SURFACE AMBIENT

Cree® surface ambient luminaires deliver improved illumination performance compared to outdated fluorescent fixtures and are designed for easy installation, saving time and money.



**LS Series**

p.54

- 90+ CRI CCT: 3500K, 4000K and 5000K
- 4' and 8' sizes
- 2500-5000 lumens and 8000-10,000 lumens
- Cree TrueWhite® Technology

**WS Series**

p.56

- Minimum 80 CRI
  - CCT: 3500K, 4000K, 5000K or 5700K
  - 4700, 5000, 5900 or 6300 lumens
  - 0-10V dimming to 5% (standard)
-

## LS Series Surface Ambient



## GRACEFUL DESIGN. STRIKING VERSATILITY.

With the LS Series linear luminaire featuring high-efficiency, exceptional color quality and application flexibility, Cree delivers breakthrough light quality and innovative design for linear lighting applications. Designed in a slim architectural form factor with flexible mounting options, the LS Series LED surface ambient luminaire offers up to 10,000 lumens of 92 CRI color quality, color temperatures of 3500K, 4000K and 5000K, and 0-10V dimming, making it ideal for new construction and upgrade applications. Optional reflectors add a streamlined appearance, enhancing the LS Series design.

### BENEFITS

- Delivered lumens up to 5,000 for 4 foot and up to 10,000 for 8 foot
- Exceptional light quality
- Precise optical control
- Compact, elegant design
- Fully luminous with no pixelation
- Versatile mounting options
- Reflector options allow for multiple design aesthetics
- Continuous row lighting

### FEATURES

- 90+ CRI
- Cree TrueWhite® Technology
- Efficacy: up to 109 LPW
- Delivered light output: up to 10,000 lumens
- CCT: 3500K, 4000K, 5000K
- Input power: 44, 88 watts
- Input voltage: 120 277 VAC; 60 Hz
- Mounting: surface suspended, pendant, cove
- 0-10V dimming to 5%

### APPLICATIONS

- Grocery, industrial, education, office, retail

LS4

LS4  
Solid ReflectorLS4  
Reflector with Apertures



## LS Series Surface Ambient

## Ordering Information

Example: LS4-40L-35K-10V

| PRODUCT | LUMEN OUTPUT | COLOR TEMP.  | VOLTAGE                             | CONTROL  | OPTIONS                  |   |
|---------|--------------|--|-------------------------------------|--|--------------------------|---|
| LS4     | 25L          | 23W, 2500 lumens - 109 LPW   | 35K 3500K                           | Blank<br>120-277 Volt<br>34<br>347 Volts<br>-Available with 40L only | 10V* 0-10V dimming to 5% | EB14 Emergency Backup<br>- Minimum 90 minutes<br>- 1400 lumens<br>- 120-277V only<br>- Available in US only |
|         | 40L**        | 44W, 4000 lumens - 90 LPW (120-277)                                      | 40K 4000K                           |  |                          |   |
|         | 50L          | 47W, 4000 lumens - 85 LPW (347V)<br>50W, 5000 lumens - 100 LPW           | 50K 5000K                           |  |                          |   |
| LS8     | 80L          | 88W, 8000 lumens - 91 LPW (120-277V)<br>90W, 8000 lumens - 89 LPW (347V) | 35K 3500K<br>40K 4000K<br>50K 5000K | Blank<br>120-277 Volt<br>34<br>347 Volts<br>-Available with 40L only | 10V* 0-10V dimming to 5% | EB14 Emergency Backup<br>- Minimum 90 minutes<br>- 1400 lumens<br>- 120-277V only<br>- Available in US only |
|         | 100L         | 100W, 10000 lumens - 100 LPW   |                                     |  |                          |   |

\* Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details. Reference [www.cree.com/Lighting/Products/Indoor/Surface-Ambient/LS-Series](http://www.cree.com/Lighting/Products/Indoor/Surface-Ambient/LS-Series) for recommended wiring dimming controls and wiring diagrams.

\*\* For CE version, please consult factory for more information.

## Accessory Information

## FIELD-INSTALLED

## Reflectors

- Refer to reflector spec sheet

## Solid

LS4-SR

LS8-SR

- Pair of reflectors

## Apertured

LS4-AR

LS8-AR

- Pair of reflectors

## Joint Aligner

LS-RJ

- Top housing aligner for continuous rows

LS-RFLJ

- Reflector aligner for continuous row

## Adjustable Cable Support Kits for T-Bar Applications

AC5-48-Q14B-TB

- Includes 5.0" (127mm) Canopy, 48.0" (1219mm) Adjustable Cable, Q14B Gripper and T-Bar Clip

## Continuous Row Through Wiring Kit

LS4TWK

- Includes (3) #12AWG 54.0" (1372mm) Wires for Line (black), Neutral (white), Ground (green), (2) #18AWG 54.0" (1372mm) Wires for 0-10V dimming (purple, gray) and (10) Wire Nuts

LS8TWK

- Includes (3) #12AWG 102.0" (2591mm) Wires for Line (black), Neutral (white), Ground (green), (2) #18AWG 102.0" (2591mm) Wires for 0-10V dimming (purple, gray) and (10) Wire Nuts

## Adjustable Cable Support Kits w/ Power Feeds\*

AC5-12/3-48-Q14B-JB

- Non-dimming applications

- Includes 5.0" (127mm) Cable Canopy, 48" (1219mm) #12/3 SJT Cord, Q14B Gripper and J-Box Strap

AC5-18/5-48-Q14B-JB

- Dimming applications

- Includes 5.0" (127mm) Cable Canopy, 48.0" (1219mm) #18/5 SJT Cord, Q14B Gripper and J-Box Strap


AC5-18/2-48-Q14B-JB

- For use with AC5-12/3-48-Q14B-JB for selective luminaire dimming control in row mounted luminaires

- Includes 5.0" (127mm) Cable Canopy, 48.0" (1219mm) #18/2 SVT Cord, Q14B Gripper and J-Box Strap

\* Refer to installation spec sheet for power feed and cable support details

## Dimensions

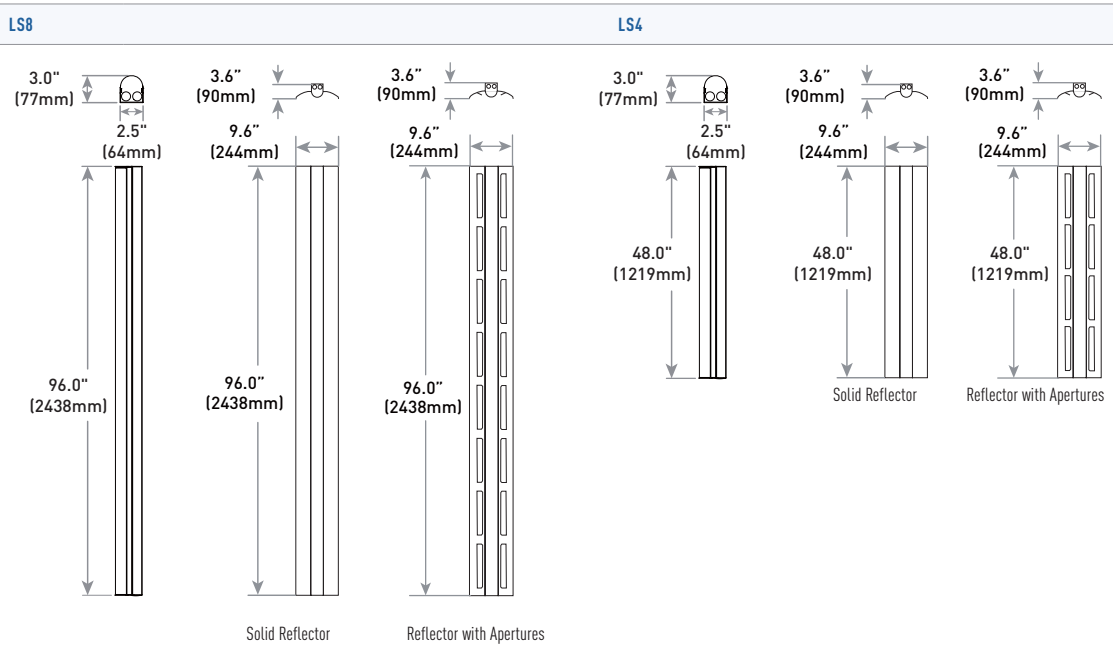

## You May Also Be Interested In:



**ZR SERIES TROFFERS**  
High-Efficiency, Affordable Troffers



**LR SERIES TROFFERS**  
LED Architectural Troffers



**CXB SERIES**  
LED High-Bay Luminaire

## WS Series



WS4™



## IDEAL FOR ENVIRONMENTALLY-DEMANDING LOCATIONS.

Constructed of one-piece molded, rugged and durable fiberglass reinforced polyester and UV stabilized impact-resistant diffused acrylic shielding, Cree WS Series meets the IP65 mechanical requirements to enable wet location installations providing protection from external elements. WS Series is ideal for low to medium mounting heights and is suitable for operating temperatures ranging from -25°C to 35°C, allowing for cold or hot weather climate installations — both new construction and upgrade applications.

### BENEFITS

- Reliable lighting source for demanding applications
- Excellent illumination with no hot spots
- Simple, secure and durable design provides dust protection and water resistance
- Ideal for wet locations and areas with dust, dirt or humidity
- Ideal for low to medium mounting heights

### FEATURES

- IP65 rated
- Minimum 80 CRI
- Efficacy: up to 98 LPW
- Delivered Light Output: 4700, 5000, 5900 and 6300 lumens
- CCT: 3500K 4000K, 5000K, 5700K
- Input Voltage: 120-277 VAC
- Dimming: 0-10V dimming: 10% - 47L and 50L; 15% - 59L and 63L

### APPLICATIONS

- Airport, Auto Dealership, Education, Government, Healthcare, Industrial & Warehouse, Municipal, Petroleum & Convenience Stores, Recreation & Public Venues, Restaurants & Hospitality, Retail & Grocery

## WS Series

## Ordering Information

Example: WS4-59L-35K-10V-FD

| PRODUCT | LUMEN OUTPUT | COLOR TEMP.               | VOLTAGE  | DIMMING                                  | COLOR/CRI               | OPTIONS                           |
|---------|--------------|---------------------------|--|--|-------------------------|-----------------------------------|
| WS4     | 47L          | 50W, 4700 lumens - 94 LPW | Blank<br>120/277 VAC   | 10V<br>0-10V dimming to 5%<br>(standard) | FD<br>CRI 80 (standard) | SSL<br>Stainless Steel<br>Latches |
|         | 50L          | 51W, 5000 lumens - 98 LPW |  |  |                         |                                   |
|         | 59L          | 63W, 5900 lumens - 94 LPW |  |  |                         |                                   |
|         | 63L          | 64W, 6300 lumens - 98 LPW |  |  |                         |                                   |
|         |              | 35K                       | 3500K<br>Available with 47L and 59L Initial<br>Delivered Lumens only |  |                         |                                   |
|         |              | 40K                       | 4000K<br>Available with 47L and 59L Initial<br>Delivered Lumens only |  |                         |                                   |
|         |              | 50K                       | 5000K<br>Available with 50L and 63L Initial<br>Delivered Lumens only |  |                         |                                   |
|         |              | 57K                       | 5700K<br>Available with 50L and 63L Initial<br>Delivered Lumens only |  |                         |                                   |

\*Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Accessory Information

## FIELD-INSTALLED

## Tamper Proof Kit

## WS4TPK

Includes 4 tamper proof screws and bit

## Tamper Proof Kit for Stainless Steel Latches

## WSSSL4TPK

Includes 4 tamper proof screws and bit

## Mounting Bracket Kit

## WS4MBK

Includes 2 stainless steel surface mount brackets


## Cable Suspension Kit

## WS4CSK

Includes 2 stainless steel brackets and 2-5' (1.5m) aircraft cables

## Dimensions

## WS4™



## You May Also Be Interested In:



## IG SERIES

LED Parking Garage Luminaire



## CXB SERIES

LED High-Bay Luminaire



## LS SERIES

LED Surface Ambient Solutions

## LED HIGH-BAY/LOW-BAY

Cree® interior high-bay and low-bay lighting is the ideal source for energy-efficient, low-maintenance illumination in large spaces. Cree high-bay and low-bay luminaires bring new levels of performance, technical innovation and contemporary design to commercial and industrial spaces.



**CXB Series**

p.70



- 18,000 and 24,000 median lumens
- Up to 130 LPW
- CCT: 4000K, 5000K
- 80 CRI
- Low-profile, lightweight design
- Flexible mounting choices
- 0-10V dimming standard
- Multi-Level option

**Cree Edge™ Series High Output**

p.72



- 70 CRI (4000K & 5700K); 90 CRI (5000K)
- CCT: 5700K standard, 5000K, 4000K
- Lumen packages available up to 75,000 lumens
- Utilizes Cree TrueWhite® Technology on 5000K luminaires
- 0-10V dimming to 5%

**304 Series™**

p.74



- Minimum 70 CRI
- CCT: 4000K or 5700K
- UL wet listed
- Multi-Level options
- IC rated and non-IC rated available
- Modular, low-profile design

**Cree Edge™ Series**

p.76



- Minimum 70 CRI
- CCT: 4000K or 5700K
- Multi-Level options
- UL damp listed
- Two-Level options
- Modular, low-profile design

## Cree CXB Series High-Bay



CXB Series Hi-Bay with  
White Diffuser



CXB Series Hi-Bay with  
Aluminum reflector



CXB Series Hi-Bay with  
Prismatic Diffuser &  
Conical Bottom Lens



## DELIVERING THE HIGHEST LUMENS PER DOLLAR AMONG COMPETING LED HIGH-BAY FIXTURES.

The CXB Series LED Low-Bay/High-Bay luminaire delivers 18,000 median and 24,000 median lumens with illumination performance to allow one-for-one replacement of 250W and 400W HID luminaires and multi-lamp fluorescent low-bay and high-bay fixtures. With exceptional rated lifetimes, zero restrike time and a compact lightweight construction, the CXB Series is a direct replacement for incumbent HID and fluorescent light sources that provides additional benefits of energy savings and significantly reduced relamp maintenance costs.

### BENEFITS

- Compact, lightweight design weighs 50% less than traditional metal halide high-bay luminaires
- Up to 50% lower energy bills and reduced maintenance costs compared to 250W and 400W HID low/high-bay fixtures
- One-for-one replacement of 250W MH, 400W MH & multi-lamp fluorescent high-bay fixtures
- Variety of lumen packages, mounting choices, reflectors and lenses
- Highest lumens per dollar against competing LED luminaires today

### FEATURES

- 20,000 and 26,000 lumens
- 80 CRI
- Up to 130 LPW
- CCT: 4000K, 5000K
- Suitable for damp environments
- Mounting options of direct J-Box, Hook & Cord and Eye Bolt
- Weighs 50% less than traditional metal halide high-bay luminaires
- 220-240 VAC input voltage

### APPLICATIONS

- Interior high-bay & low-bay, auto dealership, education, municipal, retail & grocery, industrial & warehouse

# Cree CXB Series High-Bay



## Ordering Information

Example: **Reflector:** CXBA16N + **Light Engine:** CXB-A-HC-H-40K-8-UL-10V-L715P



| REFLECTOR   |         |  |  |              |   |   |                |                             |  |
|---|---------|--|--|--------------|---|---|----------------|-----------------------------|--|
| <b>CXBA16N (Single Pack)</b><br>- 16" (406mm) Aluminum<br>- WG-A accessory recommended for use in gymnasium applications                                  |         |  |  |              | <b>CXBW16 (Single Pack)</b><br>- 16" (406mm) White Acrylic<br>- Acrylic reflector is not impact resistant nor intended for use unprotected in a gymnasium |   |                |                             |  |
| <b>CXBP16 (Single Pack)</b><br>- 16" (406mm) Clear Acrylic<br>- Acrylic reflector is not impact resistant nor intended for use unprotected in a gymnasium |         |  |  |              |   |   |                |                             |  |
| PRODUCT   | VERSION | MOUNTING   | LUMEN OUTPUT   | COLOR TEMP   | CRI   | + | VOLTAGE        | CONTROLS                    |  |
| CXB   | B       | JP<br>J-Box or Pendant<br>EY<br>Eye bolt mount<br>HH<br>Hook mount | <b>M</b><br>155W, 20,000 Median Lumens<br>- 129 LPW<br><b>H</b><br>230W, 26,000 Median Lumens<br>- 113 LPW | 40K<br>4000K | 8<br>80 CRI   | + | UC<br>220-240V | ADIM<br>1-10V Dimming to 5% |  |

\*Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Accessory Information
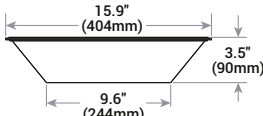
| LIGHT ENGINE  | REFLECTOR   | FIELD-INSTALLED NEMA® PLUG   |
|---|---|--|
| <b>Galvanized Safety Cables</b><br><b>SC-5</b> - 5.0' (1.5m) Cable<br><b>SC-10</b> - 10.0' (3.0m) Cable | <b>Wire Guards</b><br><b>WG-A</b> - 16" (406mm) Wire Guard for Aluminum Reflector<br><b>WG-AP</b> - 16" (406mm) Wire Guard for Acrylic Reflector<br><br> | <b>Lenses</b><br><b>DL16</b> - 16" (406mm) Acrylic Clear Prismatic Drop Lens for Acrylic Reflector<br><b>CL16</b> - 16" (406mm) Acrylic Clear Conical Bottom Lens for Acrylic Reflector<br><br>                               |
|   |   | <b>AP-515P</b><br>15 amp 120V Straight Blade Plug<br><b>AP-L515P</b><br>15 amp 120V Twist Lock Plug<br><b>AP-L615P</b><br>15 amp 240V Twist Lock Plug<br><br><b>AP-L715P</b><br>15 amp 277V Twist Lock Plug<br><b>AP-L2420P</b><br>20 amp 347V Twist Lock Plug<br><b>AP-L820P</b><br>20 amp 480V Twist Lock Plug |

## Dimensions
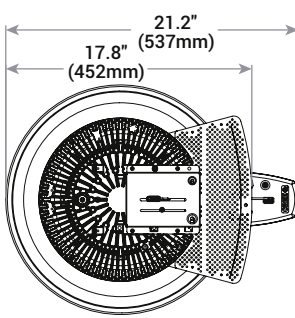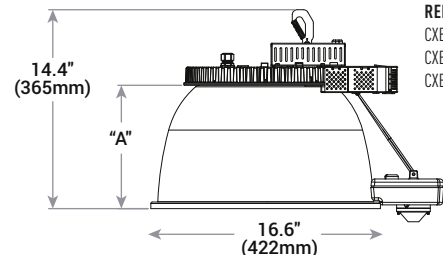
| CXB SERIES HIGH-BAY   |  |                  |                   |                    |              |                        |              |                        |              |
|---|--|------------------|-------------------|--------------------|--------------|------------------------|--------------|------------------------|--------------|
|  |   |                  |                   |                    |              |                        |              |                        |              |
|   | <table border="0"> <tr> <td><b>REFLECTOR</b></td> <td><b>"A" HEIGHT</b></td> </tr> <tr> <td>CXBA16N (Aluminum)</td> <td>9.0" (229mm)</td> </tr> <tr> <td>CXBP16 (Clear Acrylic)</td> <td>8.5" (216mm)</td> </tr> <tr> <td>CXBW16 (White Acrylic)</td> <td>8.5" (216mm)</td> </tr> </table> | <b>REFLECTOR</b> | <b>"A" HEIGHT</b> | CXBA16N (Aluminum) | 9.0" (229mm) | CXBP16 (Clear Acrylic) | 8.5" (216mm) | CXBW16 (White Acrylic) | 8.5" (216mm) |
| <b>REFLECTOR</b>  | <b>"A" HEIGHT</b>  |                  |                   |                    |              |                        |              |                        |              |
| CXBA16N (Aluminum)  | 9.0" (229mm)   |                  |                   |                    |              |                        |              |                        |              |
| CXBP16 (Clear Acrylic)  | 8.5" (216mm)   |                  |                   |                    |              |                        |              |                        |              |
| CXBW16 (White Acrylic)  | 8.5" (216mm)   |                  |                   |                    |              |                        |              |                        |              |

## You May Also Be Interested In:



**LS SERIES**  
Commercial-Grade Linear Solutions



**WS SERIES LINEAR**  
LED Surface Ambient Solutions



**304 SERIES™ PARKING STRUCTURE**  
Parking Structure Lighting Solutions

## Cree Edge™ Series High Output



Cree Edge™ High Output



## LOW COST, HIGH OUTPUT ILLUMINATION.

The Cree Edge™ High Output High-Bay luminaire is designed to deliver high lumen packages with precise optical control. The upgrade-friendly unit features a slim, low-profile design. Luminaire mount options include direct surface mount, hook and cord mounting or pendant mount. Also available with Cree TrueWhite® Technology, the Cree Edge™ High Output High-Bay helps to beautifully render true colors and deliver value beyond energy savings.

### BENEFITS

- Significant energy savings potential
- Ideal for high-bay applications
- Flexible LED configurations
- Multiple mounting options
- Ruggedly constructed to safely operate in the most demanding installations

### FEATURES

- 70 CRI (4000K & 5700K); 90 CRI (5000K)
- CCT: 5700K (+/- 500K) Standard, 5000K (+/- 300K), 4000K (+/- 300K)
- Utilizes Cree TrueWhite® Technology on 5000K luminaires
- Patented NanoOptic® Product Technology
- Limited Warranty: 10 years on luminaire / 10 years on Colorfast DeltaGuard® finish

### APPLICATIONS

- Industrial & warehouse



## Cree Edge™ Series High Output

## Ordering Information

Example: HBY-EHO-HH-DM-12-E-UL-SV-700

| PRODUCT | OPTIC  | MOUNTING                | LED COUNT (X10) | SERIES | VOLTAGE   | COLOR OPTIONS  | DRIVE CURRENT                  | FACTORY INSTALLED OPTIONS  |
|---------|--|-------------------------|-----------------|--------|---|--|--------------------------------|--|
| HBY-EHO | N6<br>NEMA 6<br>HH<br>Hangar High-Bay<br>40<br>40° Flood<br>70°<br>70° Flood | DM<br>Direct<br>Surface | 12<br>24        | E      | UL<br>Universal<br>120-277V<br>UH+<br>Universal<br>347-480V | BK<br>Black<br>BZ<br>Bronze<br>SV<br>Silver<br>WH<br>White | 700<br>700mA<br>1000<br>1000mA | <b>40K</b><br>4000K Color Temperature<br>- Minimum 70 CRI<br>- Color temperature per luminaire<br><br><b>50K</b><br>5000K Color Temperature<br>- Minimum 90 CRI<br>- Utilizes Cree TrueWhite® Technology<br>- Color temperature per luminaire<br><br><b>DIM</b><br>0-10V Dimming<br>- Control by others<br>- Refer to Dimming spec sheet for details<br>- Can't exceed specified drive current<br><br><b>F Fuse</b><br>- Refer to ML spec sheet for availability with ML options<br>- When code dictates fusing, use time delay fuse<br><br><b>ML</b><br>Multi-Level<br>- Refer to ML spec sheet for details |

\*Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Mounting Options

| HOOK AND CORD (HC)   | PENDANT (PD)    | DIRECT (DM)    |        |    |               |                |    |               |                |  |                 |         |        |    |               |                |    |               |                |  |                 |         |        |    |               |                |    |               |                |
|--|-----------------|----------------|--------|----|---------------|----------------|----|---------------|----------------|--|-----------------|---------|--------|----|---------------|----------------|----|---------------|----------------|--|-----------------|---------|--------|----|---------------|----------------|----|---------------|----------------|
|  |                 |                |        |    |               |                |    |               |                |  |                 |         |        |    |               |                |    |               |                |  |                 |         |        |    |               |                |    |               |                |
| <table border="1"> <thead> <tr> <th>LED Count (x10)</th> <th>DIM "A"</th> <th>Weight</th> </tr> </thead> <tbody> <tr> <td>12</td> <td>16.4" (418mm)</td> <td>45 lbs. (20kg)</td> </tr> <tr> <td>24</td> <td>30.0" (762mm)</td> <td>80 lbs. (36kg)</td> </tr> </tbody> </table> | LED Count (x10) | DIM "A"        | Weight | 12 | 16.4" (418mm) | 45 lbs. (20kg) | 24 | 30.0" (762mm) | 80 lbs. (36kg) | <table border="1"> <thead> <tr> <th>LED Count (x10)</th> <th>DIM "A"</th> <th>Weight</th> </tr> </thead> <tbody> <tr> <td>12</td> <td>16.4" (418mm)</td> <td>45 lbs. (20kg)</td> </tr> <tr> <td>24</td> <td>30.0" (762mm)</td> <td>80 lbs. (36kg)</td> </tr> </tbody> </table> | LED Count (x10) | DIM "A" | Weight | 12 | 16.4" (418mm) | 45 lbs. (20kg) | 24 | 30.0" (762mm) | 80 lbs. (36kg) | <table border="1"> <thead> <tr> <th>LED Count (x10)</th> <th>DIM "A"</th> <th>Weight</th> </tr> </thead> <tbody> <tr> <td>12</td> <td>16.4" (418mm)</td> <td>45 lbs. (20kg)</td> </tr> <tr> <td>24</td> <td>30.0" (762mm)</td> <td>80 lbs. (36kg)</td> </tr> </tbody> </table> | LED Count (x10) | DIM "A" | Weight | 12 | 16.4" (418mm) | 45 lbs. (20kg) | 24 | 30.0" (762mm) | 80 lbs. (36kg) |
| LED Count (x10)  | DIM "A"         | Weight         |        |    |               |                |    |               |                |  |                 |         |        |    |               |                |    |               |                |  |                 |         |        |    |               |                |    |               |                |
| 12   | 16.4" (418mm)   | 45 lbs. (20kg) |        |    |               |                |    |               |                |  |                 |         |        |    |               |                |    |               |                |  |                 |         |        |    |               |                |    |               |                |
| 24   | 30.0" (762mm)   | 80 lbs. (36kg) |        |    |               |                |    |               |                |  |                 |         |        |    |               |                |    |               |                |  |                 |         |        |    |               |                |    |               |                |
| LED Count (x10)  | DIM "A"         | Weight         |        |    |               |                |    |               |                |  |                 |         |        |    |               |                |    |               |                |  |                 |         |        |    |               |                |    |               |                |
| 12   | 16.4" (418mm)   | 45 lbs. (20kg) |        |    |               |                |    |               |                |  |                 |         |        |    |               |                |    |               |                |  |                 |         |        |    |               |                |    |               |                |
| 24   | 30.0" (762mm)   | 80 lbs. (36kg) |        |    |               |                |    |               |                |  |                 |         |        |    |               |                |    |               |                |  |                 |         |        |    |               |                |    |               |                |
| LED Count (x10)  | DIM "A"         | Weight         |        |    |               |                |    |               |                |  |                 |         |        |    |               |                |    |               |                |  |                 |         |        |    |               |                |    |               |                |
| 12   | 16.4" (418mm)   | 45 lbs. (20kg) |        |    |               |                |    |               |                |  |                 |         |        |    |               |                |    |               |                |  |                 |         |        |    |               |                |    |               |                |
| 24   | 30.0" (762mm)   | 80 lbs. (36kg) |        |    |               |                |    |               |                |  |                 |         |        |    |               |                |    |               |                |  |                 |         |        |    |               |                |    |               |                |

## Accessory Information

| FIELD-INSTALLED                 |  |  |
|---------------------------------|--|--|
| EHO-HC<br>Hook & Cord Mount Kit | EHO-PD1<br>Pendant 1-1/4" NPSM Mount Kit | EHO-PD2<br>Pendant 1-1/2" NPSM Mount Kit |

## You May Also Be Interested In:



**LS SERIES**  
Commercial-Grade Linear Solutions



**CS SERIES LINEAR**  
Commercial-Grade Linear Solutions



**304 SERIES™**  
**PARKING STRUCTURE**  
Parking Structure Lighting Solutions

## 304 Series™ Interior



304 Series™ Interior



## ARE YOUR CANOPY LIGHTS SAVING YOU MONEY?

304 Series™ recessed canopy luminaires are available in both IC and non-IC versions and add significant value to such applications. Available in multiple optics, LED counts and power conditions, the 304 Series™ offers design flexibility to precisely meet varying illumination requirements with the potential to reduce energy and maintenance costs in the process. Non-recessed versions are also available for pendant-mount applications such as convenience stores and warehouses.

### BENEFITS

- Available in multiple optics, LED counts and power options
- High-quality white light
- Greatly reduced maintenance cycles
- Controlled light distribution
- Significant energy savings potential
- UL wet listed

### FEATURES

- CRI: Minimum 70
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- Multi-Level options
- IC rated and Non-IC rated available
- Adjustable mounting brackets
- Modular, low-profile design

### APPLICATIONS

- Interior high-bay & low-bay, school & university

## 304 Series™ Interior

## Ordering Information


Example: INT-304-PS-RM-04-D-UL-SV-700-40K

| PRODUCT | FAMILY | OPTIC  | MOUNTING              | LED COUNT  | SERIES   | VOLTAGE  | COLOR  | DRIVE CURRENT  | FACTORY INSTALLED OPTIONS   |
|---------|--------|--|-----------------------|--|----------|--|--|--|---|
| INT     | 304    | <b>5M</b><br>Type V<br>Medium<br><b>5S</b><br>Type V Short<br><b>PS</b><br>Petroleum<br>Symmetric<br><b>SL</b><br>Sparkle<br>Petroleum<br><b>40</b><br>40° Flood | <b>RM</b><br>Recessed | <b>04</b><br><b>06</b><br>Available on<br>non-IC rated<br>product only | <b>E</b> | <b>UL</b><br>Universal<br>120-277V<br>- Available on IC rated<br>product only<br><b>UH</b><br>Universal<br>347-480V<br>- Available on IC rated<br>product only<br><b>12</b><br>120V<br>- Available on Non-IC<br>rated product only<br><b>27</b><br>277V<br>- Available on Non-IC<br>rated product only | <b>BK</b><br>Black<br><b>BZ</b><br>Bronze<br><b>SV</b><br>Silver<br><b>WH</b><br>White | <b>350</b><br>350mA<br><b>525</b><br><b>525mA</b><br>- Available on Non-IC<br>rated product only<br><b>700</b><br><b>700mA</b><br>- Available on Non-IC<br>rated product only<br>- Available with<br>40 LEDs | <b>40K</b> 44000K Color Temperature<br>- Minimum 70 CRI<br>- Color temperature per luminaire<br><b>DIM</b> 0-10V Dimming<br>- Control by others<br>- Refer to Dimming spec sheet<br>for details<br>- Can't exceed specified<br>drive current<br><b>F</b> Fuse<br>- When code dictates fusing,<br>use time delay fuse<br>- Refer to ML spec sheet for<br>availability with ML options<br>- Available with UL voltage only IC<br><b>IC</b> Type IC Rated<br><b>ML</b> ML Multi-Level<br>- Refer to ML spec sheet<br>for details<br><b>PML</b> Programmable Multi-Level<br>- Refer to PML spec sheet<br>for details<br>- Intended for downlight<br>applications at 0° tilt |

\*Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Dimensions

## 304 SERIES™ INTERIOR

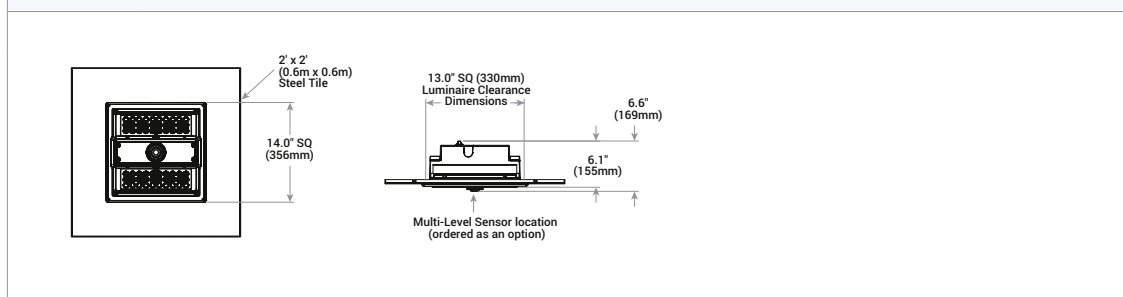

## You May Also Be Interested In:



**LS SERIES**  
Commercial-Grade Linear Solutions



**CS SERIES LINEAR**  
Commercial-Grade Linear Solutions



**304 SERIES™ PARKING STRUCTURE**  
Parking Structure Lighting Solutions

## Cree Edge™ Series Interior Round



Cree Edge™ Interior Round



## BRING ENERGY AND MAINTENANCE SAVINGS TO YOUR INTERIOR SPACE.

Cree Edge™ interior round luminaires are ideal for illuminating retail and commercial applications. The pendant-mount and hook and cord-mount luminaires provide direct uniform illumination that enhances interior aisles and displays and delivers a safe, appealing atmosphere.

With a low-profile, modular design, this stylish luminaire provides improved illumination performance while reducing energy consumption.

### BENEFITS

- Significant energy savings potential
- Greatly reduced maintenance cycles
- High-quality, white light
- Controlled light distribution

### FEATURES

- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- UL damp listed
- Adjustable mounting bracket
- Modular, low-profile design

### APPLICATIONS

- Interior high-bay & low-bay, petroleum & convenience store, airport, restaurant & hospitality, retail & grocery

## Cree Edge™ Series Interior Round


## Ordering Information

Example: INT-EDR-PS-HC-04-D-UL-SV-700-40K

| PRODUCT | FAMILY | OPTIC   | MOUNTING   | LED COUNT   | SERIES                            | VOLTAGE                     | COLOR        | DRIVE CURRENT  | FACTORY INSTALLED OPTIONS   |
|---------|--------|---|--|-------------|-----------------------------------|-----------------------------|--------------|--|---|
| INT     | EDR    | PS<br>Petroleum<br>Symmetric<br><br>40<br>40° Flood | HC<br>Hook and<br>Cord Mount<br><br>PD<br>Pendant<br>Mount | 04          | E                                 | UL<br>Universal<br>120-277V | SV<br>Silver | 350  | 40K<br>4000K Color Temperature<br>- Minimum 70 CRI<br>- Color temperature per luminaire |
|         |        |   |  | 06          |                                   |                             |              | 350mA  |   |
|         |        |   |  | 08          |                                   |                             |              | 525  |   |
|         |        |   |  | 10          |                                   |                             |              | 525mA  |   |
|         |        |   | 12   |             | UH<br>Universal<br>347-480V       | BK<br>Black                 | 700          | DIM<br>0-10V Dimming<br>- Control by others<br>- Refer to Dimming spec sheet for details<br>- Can't exceed specified drive current<br><br>HL<br>Hi/Low (Dual Circuit Input)<br>- Refer to HL spec sheet for details<br>- Sensor not included |   |
|         |        |   |  | WH<br>White | - Available<br>with 40-60<br>LEDs |                             |              |  |   |

\*Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Mounting Options

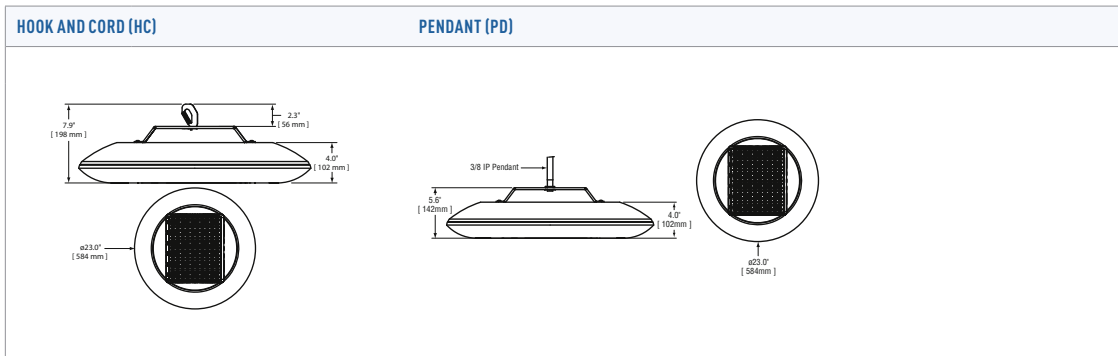

## You May Also Be Interested In:


**CREE EDGE™ AREA ROUND**

Outdoor Architectural-Grade Area Lighting


**CS SERIES LINEAR**

Commercial-Grade Linear Solutions


**CREE EDGE™ CANOPY**

Outdoor Canopy and Soffit Solutions

## LED LAMPS

Cree® LED lamps deliver an unrivaled combination of superior color accuracy and industry-leading efficacy, energy efficiency and longevity. Cree® lamps powered by Cree TrueWhite® Technology offer 90+ CRI and exceptional efficacy, providing high-quality lighting that is both crisp and warm – creating an inviting atmosphere to impress guests and drawing out the naturally vibrant colors of food and merchandise to enhance their appeal, all while delivering operational savings directly to the bottom line.





### MR16 Series

p.70

- 50W MR16 equivalent
  - 8.7 watts
  - >90 CRI at 3000K
  - 15°, 25° or 40° beam angles
  - Dimmable to 5% with select dimmers and transformers
-

## MR16 Series Lamps



MR16



15° Spot

40° Wide Flood

25° Flood

## FINALLY, A TRUE LED 50W MR16 REPLACEMENT LAMP.

The Cree® MR16 Series TrueWhite® LED Lamp is a true 50W halogen MR16 equivalent that delivers up to 584 lumens of superior 90 CRI with R9 >50 color quality while achieving up to 67 lumens per watt. This MR16 boasts a slim design to allow universal form and fit into most global MR16 fixtures and is available in a variety of beam angles with a color temperature of 3000K. The Cree MR16 Series TrueWhite® LED Lamp's impressive combination of greater than 80% energy savings, significant maintenance savings and pending ENERGY STAR® qualification\* makes it a perfect solution for track and accent lighting.

### BENEFITS

- Smaller, "perfect" fit design for increased track head compatibility
- Up to 80% energy cost savings
- Payback in less than one year
- ENERGY STAR® qualified excluding the 540 lumens (15°) version

### FEATURES

- Utilizes Cree TrueWhite® Technology
- Beam Angles: 15°, 25° and 40°
- >90 CRI
- Input Power: 8.7 watts (50W eq)
- 5% dimming
- Delivered Light Output: 540 lumens (15D), 580 lumens (25D), 584 lumens (40D)

### APPLICATIONS

- Accent, track and downlighting ideal for retail, grocery, restaurant, museum and commercial applications



## MR16 Series Lamps


## Ordering Information

Example: MR16-50W-30K-25D

| PRODUCT | WATT EQUIVALENT        | COLOR TEMP.  | BEAM ANGLE   | BASE TYPE           |
|---------|------------------------|--------------|--|---------------------|
| MR16    | 50<br>50W (620 Lumens) | 30K<br>3000K | 15D<br>15° Spot<br>25D<br>25° Flood<br>40D<br>40° Wide Flood | Blank<br>GU5.3 Base |

\*Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Dimensions

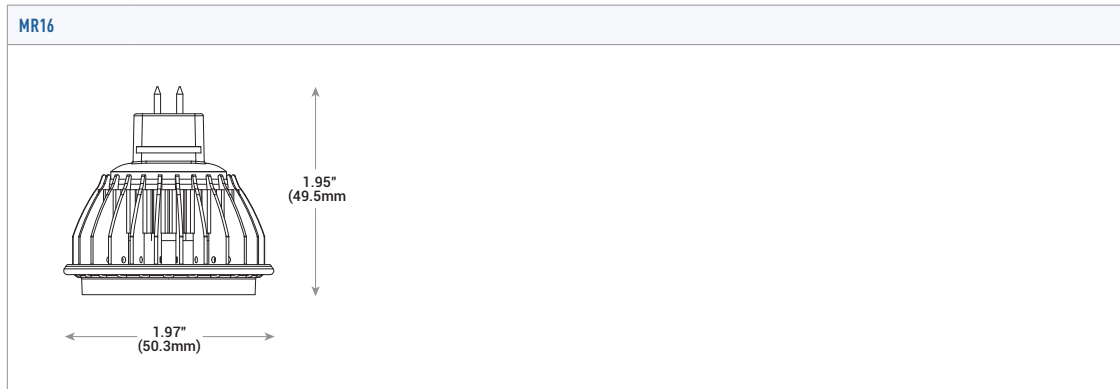

## You May Also Be Interested In:



**CR SERIES - CR150™**  
Commercial-Grade Downlight  
Upgrade Solutions



**LR SERIES DOWNLIGHTS**  
Commercial-Grade Downlight  
Upgrade Solutions



**CR SERIES TROFFERS**  
High-Efficiency, Affordable Troffers

# INTELLIGENT LIGHT SOLUTIONS

At Cree, innovation doesn't stop at our world-class LED luminaires because we aim to deliver so much more. Cree's intelligent light solutions provide a combination of extreme energy productivity and code compliance that's so intuitive and simple, it just works.





## WORKS LIKE MAGIC. IN A SCIENTIFIC SORT OF WAY.

Cree SmartCast® Technology is the most intuitive and easiest to install intelligent light solution on the market. SmartCast Technology delivers up to 70% energy savings at up to half the cost of other solutions. Luminaires combine best-in-class light with onboard sensors and intelligence to deliver extreme energy productivity, code compliance and a better light experience without any extra design, installation or setup work.

### Cree SmartCast® Technology

p.74

- Intelligent by design
  - Intuitive implementation
  - Scalable for BMS and IoT integration
  - Up to 70 percent reduction in energy consumption over traditional fluorescent luminaires
  - Half the cost of traditional lighting controls
  - Compliant with emerging code requirements throughout US & Canada
  - 5-year warranty
-

## Cree SmartCast® Technology - Wireless



## BETTER LIGHT DELIVERED INTELLIGENTLY AND SIMPLY.

With Cree SmartCast® Technology, we've totally redefined intelligent lighting by making it so intuitive and simple, it just works. It does what intelligent light should: it saves you money while helping make your whole enterprise more productive. Cree luminaires and dimmers enabled with SmartCast® Technology deliver essential lighting control without the complex design, installation and setup of today's lighting control systems. Integrated ambient and occupancy sensing and wireless communication are incorporated to deliver exceptional lighting performance, achieve additional energy savings over non-controlled solutions and extend product life. An added bonus: the CR Series troffers with Cree SmartCast® Technology offer field-adjustable color temperatures that simplify projects by allowing one troffer to be used in any space regardless of color temperature preference.

### BENEFITS

- Intuitive and effortless installation and setup easily commissions and connects up to 250 lights with the touch of a button
- Better light that adapts to the user
- Deep energy savings – combined with strategies like daylight harvesting, occupancy sensing and optional task tuning cut lighting bills by up to 70%
- Up to half the installed cost of traditional lighting control systems
- Greatly simplified daylight harvesting, motion sensing, adaptive lighting and dimming without third-party-devices or additional wires
- Eliminates the painstaking and error-prone process of manually commissioning each light

### FEATURES

- Fully-integrated solution with user-driven design and engineering
- Innovative OneButton™ Setup automatically creates a lighting network and intelligently groups lights together
- Secure, wireless communication
- Integral ambient light and motion sensors
- Daylight harvesting and motion sensing
- Compatible with CR Series troffers, ZR Series troffers, CS Series linear luminaires, KR Series downlights and LN Series suspended ambient luminaires
- Enables continuous dimming
- Field-adjustable color temperatures with CR Series troffers

**CREE** 

**SMARTCAST® TECHNOLOGY**

[lighting.cree.com/SmartCast](http://lighting.cree.com/SmartCast)

# Cree SmartCast® Technology - Wireless

## SmartCast™ Technology Field Installed Accessories



Configuration Tool

Wireless Dimmer and Switch

0-10V Interface w/  
Intergrated Ambient Light &  
Motion Sensor

| PRODUCT NUMBER   | PRODUCT DESCRIPTION  |
|------------------|--|
| CWD-CWC-WH       | Field Installed Accessories*                                 |
| CWS-CWC-WH       | Wireless Dimmer  |
| CFP-1-WH         | Wireless Switch  |
| CFP-2-WH         | Face Plate 1 Gang  |
| CFP-3-WH         | Face Plate 2 Gang  |
| CCT-CWC-1        | Face Plate 3 Gang  |
| CIF-10V-CWC-SNSR | Configuration Tool   |
|                  | 0-10V Interface w/ Intergrated Ambient Light & Motion Sensor |

\*See specification sheets for specific product details and illustrations.

## You May Also Be Interested In:



**CR SERIES TROFFERS** p.30  
High-Efficiency, Affordable Troffers



**CS SERIES LINEAR** p.50  
Commercial Linear Solutions

# OUTDOOR LED PRODUCTS

Cree luminaires provide improved illumination performance, consume less energy and require less maintenance than traditional lighting solutions. In fact, many BetaLED® Technology advancements have shaped what is standard in the LED lighting industry today.

## LED AREA

**OSQ Series**  
Area p.82



**XSP Series**  
Area p.84



**XSP Series High Output**  
Area p.86



**Cree Edge™ Series**  
Area Square / Area Round p.88



**Cree Edge™ Series High Output**  
Area p.90



**Cree Edge™ Series**  
Pathway p.92



## LED STREET & ROADWAY

**RSW Series**  
Small p.96



**RUL Series**  
Rural Utility p.98



**XSP Series**  
XSP1™ / XSP2™ / XSPR™ p.100



**XSP Series High Output**  
XSP1™ / XSP2™ / XSPR™ p.102



## LED STREET & ROADWAY

**LEDway® Series**  
HT Mount p.104



**LEDway® Series High Output**  
Single / Double p.106



**Cree Edge™ Series**  
Transportation Mount p.108



**DPT Series**  
Post-Top Luminaire p.112



**LED Upgrade Kit**  
Traditional Post-Top Upgrade Kit p.114



## LED DECORATIVE STREET & ROADWAY

## LED CANOPY & SOFFIT

**CPY Series**  
Direct Mount p.118



**228 Series™**  
Recessed & Remodel Mounts p.120



**304 Series™**  
Recessed Mount p.122



**Cree Edge™ Series**  
Surface Mount p.124



**LED PARKING STRUCTURE**

**IG Series**

Parking Structure p.128



**304 Series™**

Parking Structure p.130



**VG Series**

Parking Structure p.132



**LED FLOOD**

**OSQ Series**

Flood p.136



**Cree Edge™ Series**

High Output Flood / Flood Square p.138



**304 Series™**

Flood p.140



**OL Series™**

Linear Flood p.142



**LED WALL MOUNT**

**XSP Series**

Wall Pack p.146



**Cree Edge™ Series**

Wall Pack p.148



# OUTDOOR APPLICATIONS

Cree® outdoor luminaires offer significant energy and maintenance savings compared to traditional light sources and provide a budget-sensitive alternative to help stretch your outdoor lighting budget.







### Airports

Cree® luminaires lower energy consumption and costs, reduce maintenance expenses and provide a tremendous improvement in lighting performance at airports throughout the world.



### Auto Dealerships

Showcase your dealership and attract more customers with beautiful LED lighting.



### Corporate & Office

For corporations planning newly-constructed or renovated campuses, Cree is the lighting product of choice for up to 80 percent energy savings and contributions toward LEED credits from the U.S. Green Building Council.



### Education

The U.S. Green Building Council sees school construction and renovation as a sector that has potential for tremendous energy savings by implementing environmental solutions. Schools and universities looking for sustainable lighting alternatives are selecting Cree.



### Government & Municipal

Cree products can help you meet your high-performance building goals through energy reduction and maintenance elimination.



### Healthcare

With healthcare ranking as the second largest energy consumer in the U.S., the industry is turning toward energy-saving sources like Cree efficient luminaires to meet Department of Energy initiatives.



### Pedestrian & Recreation

Illuminated walkways are energy-efficient, architecturally pleasing and create a safe environment.



### Petroleum & C-Store

Petroleum stations are attracting customers with improved Cree lighting that creates an inviting environment with dramatically better visibility and the added benefit of tremendous energy savings.



### Retail & Hospitality

Cree luminaires are the ideal solution for multiple location franchise installations because they offer the versatility of optical selections and upgradable modular LED light bars to meet different lighting ordinances.




### Street & Roadway

Offering an unmatched range of lumen and optical packages for streets and roadways, Cree has the versatility needed to provide exceptional value on most streets.

## LED AREA

A space can be transformed with the right outdoor area lighting. Cree's modular design and multiple choices of power condition offer the ability to fine-tune a solution that provides precisely the right amount of light in precisely the right location, all with unmatched value and energy efficiency.

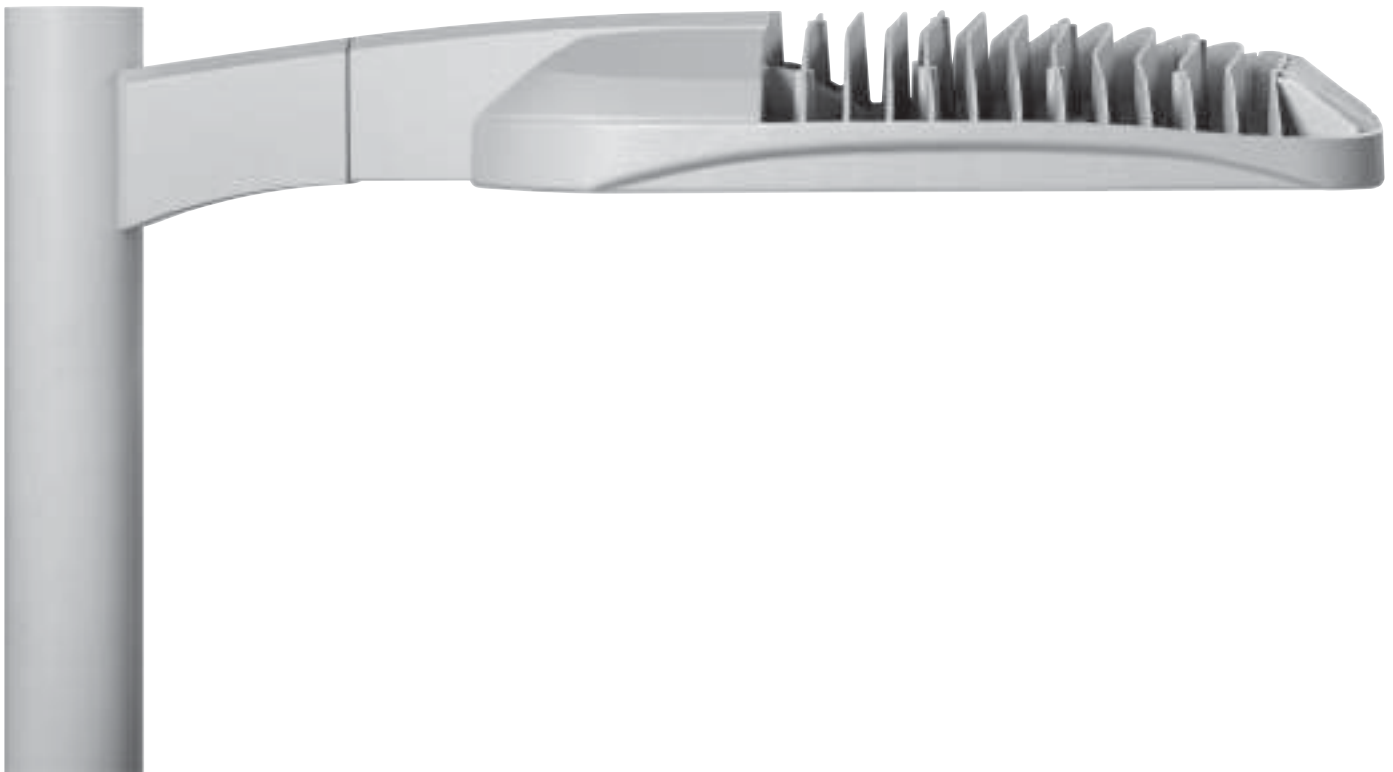

**OSQ Series**

p.82



- CRI: 70 CRI (4000K & 5700K; 3000K asymmetric optics); 80 CRI (3000K symmetric optics)
- CCT: 3000K (+/- 300K), 4000K (+/- 300K), 5700K (+/- 500K)
- Lumen Range: 7,644 - 28,285
- cULus Listed
- Utilizes NanoOptic® Technology
- Adjustable or Direct Mount

**XSP Series**

p.84



- Minimum 70 CRI
- CCT: 3000K (+/-300), 4000K (+/-300K), 5700K (+/-500K)
- NanoOptic® Precision Delivery Grid™ optic
- Single or double modules
- cULus Listed suitable for wet locations
- Designed with 0-10V dimming capabilities

**XSP Series High Output**

p.86



- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- NanoOptic® Precision Delivery Grid™ optic
- UL wet listed
- Increased lumen output

**Cree Edge™ Series**

p.88



- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- UL wet listed
- Two-level options
- Modular, low-profile design

**Cree Edge™ High Output**

p.90



- Minimum 70 CRI (4000K & 5700K); 90 CRI (5000K)
- CCT: 4000K (+/- 300K), 5000K (+/- 300K), 5700K (+/- 500K)
- Utilizes Cree TrueWhite® Technology on 5000K Luminaires
- UL wet listed
- Slim, low profile design

**Cree Edge™ Series Pathway**

p.92



- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- UL wet listed
- Two-level options
- Multiple heights available

## OSQ Series Area



## ADVANCING LIGHT THROUGHOUT YOUR SITE.

The OSQ Series blends extreme optical control, advanced thermal management and light quality to bring you the latest advancements in LED technology. And we didn't stop there — we added a clean, modern housing and versatile mounting options all with an attractive price point. Whether you have a new construction or upgrade application, the OSQ Series is perfect for parking lots, internal roadways and general site lighting.

### BENEFITS

- Suitable upgrade for HID applications up to 1000 Watts
- Versatile mounting configurations offer simple installation
- Slim, low-profile design minimizes wind load requirements
- Improved energy and maintenance savings
- Standard 10-year limited warranty

### FEATURES

- Minimum 70 CRI (4000K & 5700K; 3000K asymmetric optics); 80 CRI (3000K symmetric optics)
- CCT: 3000K (+/- 300K), 4000K (+/- 300K), 5700K (+/- 500K)
- Utilizes NanoOptic® Technology
- cULus Listed

### APPLICATIONS

- Airport, Auto Dealership, Corporate & Office, Education, Government, Healthcare, Municipal, Pedestrian, Petroleum & Convenience Stores, Recreation & Public Venues, Restaurants & Hospitality, Retail & Grocery

OSQ™ Area with DA Mount



OSQ™ Area with AA Mount



# OSQ Series Area



## Ordering Information

Example: **Mount:** OSQ-AA-SV + **Luminaire:** OSQ-A-NM-2ME-A-40K-UL-SV

| MOUNT                           |                         |                    | COLOR OPTIONS   |  |   |  |  |   |
|---------------------------------|-------------------------|--------------------|---|--|---|--|--|---|
| <b>OSQ-AA</b><br>Adjustable Arm | <b>OSQ-DA</b><br>Direct | <b>BK</b><br>Black | <b>SV</b><br>Silver   | <b>BZ</b><br>Bronze  | <b>WH</b><br>White  |  |  |   |
| PRODUCT                         | VERSION                 | MOUNTING           | OPTIC   | INPUT POWER DESIGNATOR   | CCT   | VOLTAGE  | COLOR OPTIONS  | OPTIONS   |
| OSQ                             | A                       | NM<br>No Mount     | <b>ASYMMETRIC:</b><br><b>2ME</b><br>Type II Medium<br><b>3ME</b><br>Type III Medium<br><b>4ME</b><br>Type IV Medium | <b>A</b><br>112W<br>(Medium)<br><b>J</b><br>168W<br>(Medium)<br><b>S</b><br>223W<br>(Large)<br><b>U</b><br>215W<br>(Large) | <b>30K</b><br>3000K<br><b>40K</b><br>4000K<br><b>57K</b><br>5700K | <b>UL</b><br>Universal<br>120-277V<br><b>UH</b><br>Universal<br>347-480V | <b>BK</b><br>Black<br><b>BZ</b><br>Bronze<br><b>SV</b><br>Silver<br><b>WH</b><br>White | <b>DIM</b><br>0-10V Dimming<br><b>F</b><br>Fuse<br><b>ML</b><br>Multi-Level<br><b>PML</b><br>Programmable Multi-Level,<br>20'-40' Mounting<br><b>PML2</b><br>Multi-Level, 10'-30'<br>Mounting Height<br><b>Q9</b><br>Field Adjustable Output<br><b>R</b><br>NEMA® Photocell Receptacle<br><b>RL</b><br>Rotate Left<br><b>RR</b><br>Rotate Right |
|                                 |                         |                    | <b>SYMMETRIC:</b><br><b>5ME</b><br>Type V Medium<br><b>5SH</b><br>Type V Short                                      | <b>B</b><br>86W (Medium)<br><b>K</b><br>130W (Medium)<br><b>T</b><br>171W (Large)<br><b>U</b><br>215W (Large)              |   |  |  |   |

\*Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.  
 \* Available with Backlight Shield when ordered with field-installed accessory

## Dimensions

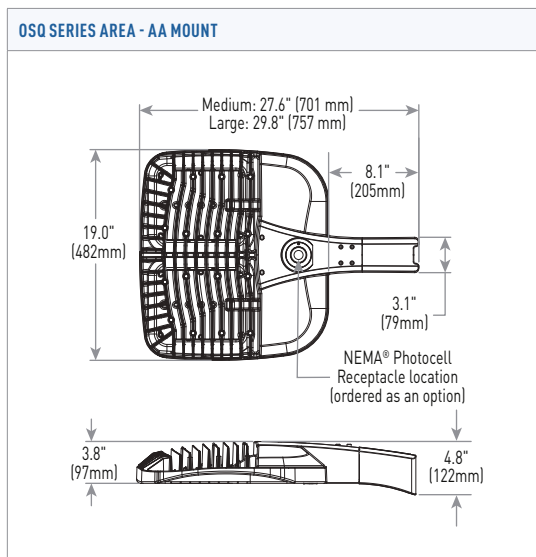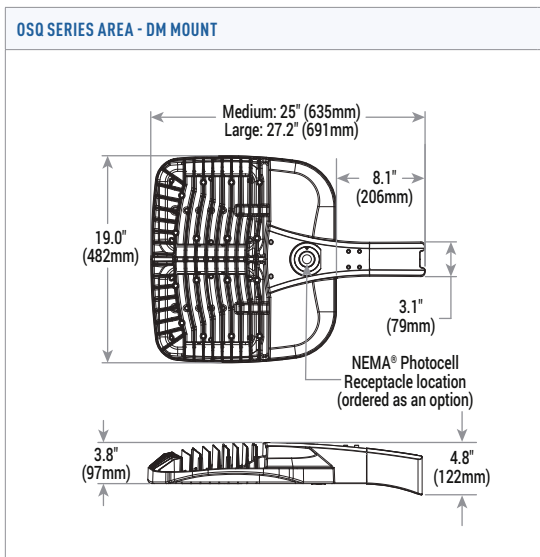

## Accessory Information

**BACKLIGHT SHIELD**

OSQ-BLSMF – Front facing optics  
 OSQ-BLSMR – Rotated optics

**HAND-HELD REMOTE**

XA-SENSREM for PML Option

## You May Also Be Interested In:



**TRADITIONAL POST-TOP UPGRADE KIT**  
 Easily Convert Decorative Street Lights to LED



**XSP SERIES WALL PACK**  
 Affordable Site Lighting Solutions



**OSQ SERIES FLOOD**  
 Flood Lighting Solutions

## XSP Series Area



XSP1™ Area

XSP2™ Area



## MAKING THE SWITCH TO LED LIGHTING IS AN EASY DECISION.

Designed to replace up to 400W metal halide pole-mounted area lights, the Cree XSP Series Area light provides an excellent alternative to traditional HID lighting with superior optical control to put the light exactly where it needs to go. The XSP Area leverages Cree's innovative technology, developed for the industry-leading XSP Series street lights, offering customers a premier area lighting solution covered by a 10-year limited warranty.

### BENEFITS

- Improved illumination performance
- Significant energy and maintenance savings
- Eliminate the relamping cycle
- Field Adjustable Output option for increased flexibility
- 10-year limited warranty

### FEATURES

- Minimum 70 CRI (4000K & 5700K); 80 CRI (3000K)
- CCT: 3000K (+/-300K), 4000K (+/-300K), 5700K (+/-500K)
- NanoOptic® Precision Delivery Grid™ optic
- Exclusive Colorfast DeltaGuard® Finish

### APPLICATIONS

- Airport, auto dealership, corporate & office, education, government, healthcare, industrial & warehouse, municipal, parking, pedestrian, petroleum & convenience stores, recreation & public venues, restaurants & hospitality, retail & grocery

# XSP Series Area


## Ordering Information

Example: BXSP-B-HT-2ME-A-40K-UL-SV


| PRODUCT | VERSION | MOUNTING               | OPTIC  | INPUT POWER DESIGNATOR  | CCT  | VOLTAGE  | COLOR OPTIONS                               | OPTIONS  |
|---------|---------|------------------------|--|---|--|--|---|--|
| BXSP    | B<br>C  | HT<br>Horizontal Tenon | 2ME*<br>Type II Medium<br>2LG*<br>Type II Long<br>3ME*<br>Type III Medium<br>4ME*<br>Type IV Medium<br>5ME<br>Type V Medium<br>5SH<br>Type V Short | A<br>53W (XSP1, B)<br>B<br>101W (XSP2, B)<br>E<br>101W (XSP1, C)<br>F<br>139W (XSP2, C) | 30K<br>3000K<br>40K<br>4000K<br>57K<br>5700K | UL<br>Universal<br>120-277V<br>UH<br>Universal<br>347-480V | BK<br>Black<br>BZ<br>Bronze<br>SV<br>Silver | ML<br>Multi-Level<br>N<br>Utility Label and NEMA® Photocell Receptacle<br>O9<br>Field Adjustable Output<br>R<br>NEMA® Photocell Receptacle |

## Poles & Tenon Options

### POLE SPECIFICATION



**PS**  
Crown-Weld® Square Straight Steel Poles



**PS5R**  
Round Steel Poles



**PSRV**  
Round Tapered Steel Poles

### HORIZONTAL TENON OPTIONS

\* Specify mounting configuration



**PD-H4**  
Square Internal Mount  
Mounts to 4" (102mm) square aluminum or steel poles



**PT-H**  
Round External Mount  
Mounts to 2-3/8 - 3" (60 - 76mm) round aluminum or steel poles



**WM-2L**  
Wall Mount




**XA-TMDA8**  
Direct Arm Pole Adaptor Bracket  
Mounts to 3 - 6" (76 - 152mm) round or square aluminum or steel poles

## Accessory Information


| BIRD SPIKE OPTIONS*  | BACKLIGHT CONTROL SHIELD OPTIONS   | FOUR POINT MOUNTING KIT   |
|--|--|---|
| <p><b>XA-SP1BRDSPK</b><br/>(single-module)<br/><b>XA-SP2BRDSPK</b><br/>(double-module)</p> | <p>Provides 1/2 Mounting Height Cutoff<br/><b>XA-SP1BLS</b> (for use with single-module)<br/><b>XA-SP2BLS</b> (for use with double-module)</p> | <p><b>XA-XSP4PTMNT</b><br/>Includes large bracket for mounting to 2" (51mm) IP, 2.375" (60mm) O.D. tenon, small bracket for mounting to 1.25" (32mm) IP, 1.66" (42mm) O.D. tenon and mounting bolts</p> |

## Dimensions

### XSP1™ (SINGLE-MODULE)



### XSP2™ (DOUBLE-MODULE)



## You May Also Be Interested In:



**OSQ SERIES AREA**  
Low-Profile Area Lighting Solutions



**XSP SERIES WALL PACK**  
Affordable Site Lighting Solutions



**DPT SERIES POST-TOP LUMINAIRE**  
Easily Convert Decorative Street Lights to LED

## XSP Series Area High Output



## GET MORE FOR LESS.

The XSP High Output Series delivers up to 18,523 lumens with incredible efficacy – up to 116LPW. In addition to substantial energy and maintenance savings, the XSP High Output Series achieves better optical control with the NanoOptic® Precision Delivery Grid™ optic over incumbent area lighting solutions from 70W up to 250W. Expanding Cree's innovative technology used in the XSP Series, the XSP High Output Series provides the illumination performance you need and trust.

### BENEFITS

- Improved illumination performance
- Significant energy and maintenance savings
- Eliminate the relamping cycle
- Smart-city ready for increased flexibility
- 10-year limited warranty

### FEATURES

- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- NanoOptic® Precision Delivery Grid™ optic
- Exclusive Colorfast DeltaGuard® Finish
- Traditional cobra head appearance
- UL wet listed

### APPLICATIONS

- Government & municipal, roadway

XSP1™ Area



XSP2™ Area





# XSP Series Area High Output








## Ordering Information

Example: BXSP1-HO-HT-2ME-100W-40K-UL-SV

| PRODUCT  | MOUNTING               | OPTIC                   | INPUT POWER                      | CCT                   | VOLTAGE                     | COLOR OPTIONS                               | OPTIONS   |
|----------|------------------------|-------------------------|----------------------------------|-----------------------|-----------------------------|---|---|
| BXSP1-HO | HT<br>Horizontal Tenon | 2ME*                    | 100W                             | 40K                   | UL<br>Universal<br>120-277V | BK<br>Black<br>BZ<br>Bronze<br>SV<br>Silver | N<br>Utility Label and NEMA Photocell Receptacle<br>Q9<br>Field Adjustable Output<br>R<br>NEMA Photocell Receptacle |
|          |                        | 2LG*                    | 100W (XSP1-HO)<br>165W (XSP2-HO) | 4000K<br>57K<br>5700K |                             |   |   |
| BXSPR-HO | HT<br>Horizontal Tenon | 2ME*                    | 60W                              | 40K                   | UL<br>Universal<br>120-277V | SV<br>Silver                                | N<br>Utility Label and NEMA Photocell Receptacle  |
|          |                        | 2LG*                    | 60W<br>80W<br>80W                | 4000K<br>57K<br>5700K |                             |   |   |
|          |                        | 3ME*                    |                                  |                       |                             |   |   |
|          |                        | 4ME*                    |                                  |                       |                             |   |   |
|          |                        | Type II Medium          |                                  |                       |                             |   |   |
|          |                        | Type II Long            |                                  |                       |                             |   |   |
|          |                        | Type III Medium         |                                  |                       |                             |   |   |
|          |                        | Type IV Medium          |                                  |                       |                             |   |   |
|          |                        | Type V Short (60W only) |                                  |                       |                             |   |   |

\*Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.  
 \*\*Available with Backlight Shield when ordered with field-installed accessory

## Mounting Options



| POLE SPECIFICATION   | TENONS & BRACKETS   |
|--|---|
| Consult factory for more information.  |   |
|  |    |
| <b>PS</b><br>Crown-Weld® Square Straight Steel Poles                               | <b>PD-H4</b><br>Square Internal Mount Horizontal Tenons (Steel) - Mounts to 4" (102mm) square aluminum or steel poles                         |
|  |    |
| <b>PS5R</b><br>Round Steel Poles   | <b>PT-H</b><br>Round External Mount Horizontal Tenons (Aluminum) - Mounts to 2.375"-3" (60-76mm) O.D. round aluminum or steel poles or tenons |
|  |    |
| <b>PSRV</b><br>Round Tapered Steel Poles   | <b>WM-2L</b><br>Extended Horizontal Wall Mount Bracket - Mounts to wall, roof or side of wood pole  |
|  |    |
|  | <b>XA-TMDA8</b><br>Direct Arm Pole Adaptor Bracket - Mounts to 3 - 6" (76 - 152mm) round or square aluminum or steel poles                    |
|  | * Specify mounting configuration.   |

## Accessory Information

| BIRD SPIKE OPTIONS                       | BACKLIGHT CONTROL SHIELD OPTIONS              |
|--|---|
| <b>XA-SP1BRDSPK**</b><br>(single-module) | Provides 1/2 Mounting Height Cutoff           |
| <b>XA-SP2BRDSPK**</b><br>(double-module) | <b>XA-SP1BLS</b> (for use with single-module) |
|  | <b>XA-SP2BLS</b> (for use with double-module) |
|  | <b>XA-SPR3BLS</b> (for use with XSPR, 60W)    |
|  | <b>XA-SPRBLs</b> (for use with XSPR, 80W)     |

\*\*does not apply to XSPR.

## Dimensions



## You May Also Be Interested In:



**DPT SERIES POST-TOP LUMINAIRE**  
Easily Convert Decorative Street Lights to LED



**LEDWAY® SERIES STREET LIGHTS**  
Versatile Street Light Solutions



**XSP SERIES AREA**  
Area Lighting Solutions

## Cree Edge™ Series Pole-Mounted



## THE PRODUCT THAT HELPED START A REVOLUTION.

Successfully launched in 2007, Cree Edge™ Area luminaires helped set the standard for performance and value. Available in a variety of LED counts, multiple power conditions and optical distributions, Cree Edge™ Area luminaires offer a scalable solution that provides exacting illumination performance. And with several upgrade-friendly mounts to choose from, product advances and the expansion of the line that now includes a truly high output solution, Cree Edge™ Area luminaires offer more value and versatility today than ever before.

### BENEFITS

- Improved illumination performance
- Significant energy and maintenance savings
- Eliminate the relamping cycle
- Standard 10-year limited warranty

### FEATURES

- Minimum 70 CRI (4000K, 5700K)
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- UL wet listed
- Meets Buy American requirements within ARRA
- Optional backlight cutoff shield
- Modular, low-profile design

### APPLICATIONS

- Airport, auto dealership, corporate & office, education, government & municipal, healthcare, industrial & warehouse, pedestrian & recreation, petroleum & convenience store, restaurant & hospitality, retail & grocery

Cree Edge™ LTG Area



Cree Edge™ Area Round



# Cree Edge™ Series Pole-Mounted









## Ordering Information

Example: ARE-EDR-2M-AA-06-E-UL-SV-525-DIM



| PRODUCT | FAMILY     | OPTIC                         | MOUNTING                     | # OF LEDS (X10)                       | LED SERIES | VOLTAGE  | COLOR OPTIONS                      | DRIVE CURRENT | FACTORY INSTALLED OPTIONS |             |           |                       |                               |   |
|---------|------------|-------------------------------|------------------------------|---------------------------------------|------------|----------|------------------------------------|---------------|---------------------------|-------------|-----------|-----------------------|-------------------------------|---|
| ARE     | EDG<br>EDR | <b>2M</b>                     | <b>4M</b>                    | <b>AA</b>                             | <b>02</b>  | <b>E</b> | <b>UL</b><br>Universal<br>120-277V | <b>350</b>    | <b>40K</b>                | <b>PML2</b> |           |                       |                               |   |
|         |            | Type II Medium                | Type IV Medium               | Adjustable Arm                        | <b>04</b>  |          |                                    |               |                           |             | <b>BK</b> | Black                 | 4000K CCT                     | Programmable  |
|         |            | <b>2MB</b>                    | <b>4MB</b>                   | <b>DA</b>                             | <b>06</b>  |          |                                    |               |                           |             | <b>BZ</b> | Bronze                | <b>DIM</b>                    | Multi-Level,  |
|         |            | Type II Medium w/ BLS         | Type IV Medium w/ BLS        | Direct Arm                            | <b>08</b>  |          |                                    |               |                           |             | <b>UH</b> | Universal<br>347-480V | 0-10V Dimming                 | 10'-30'   |
|         |            | <b>2MP</b>                    | <b>4MP</b>                   | <b>DL</b>                             | <b>10</b>  |          |                                    |               |                           |             | <b>SV</b> | Sliver                | <b>F</b>                      | Mounting Height   |
|         |            | Type II Medium w/partial BLS  | Type IV Medium w/partial BLS | Direct Long Arm                       | <b>12</b>  |          |                                    |               |                           |             | <b>WH</b> | White                 | Fuse                          | <b>R</b>  |
|         |            | <b>3M</b>                     | <b>5M</b>                    | <b>R3</b>                             | <b>14</b>  |          |                                    |               |                           |             |           |                       | High/Low (Dual Circuit Input) | <b>NEMA®</b> Photocell<br>Receptacle                    |
|         |            | Type III Medium w/partial BLS | Type V Medium                | Spider, Center Tenon, 2-3/8" to 3" OD | <b>16</b>  |          |                                    |               |                           |             |           |                       | <b>ML</b>                     | Multi-Level   |
|         |            | <b>3MB</b>                    | <b>5S</b>                    | <b>R4</b>                             |            |          |                                    |               |                           |             |           |                       | <b>P</b>                      | Photocell   |
|         |            | Type III Medium w/ BLS        | Type V Short                 | Spider, Center Direct, 4" Square      |            |          |                                    |               |                           |             |           |                       | <b>PML</b>                    | Programmable<br>Multi-Level, 20'-40'<br>Mounting Height |
|         |            | <b>3MP</b>                    |                              | <b>R5</b>                             |            |          |                                    |               |                           |             |           |                       |                               |   |
|         |            | Type III Medium w/partial BLS |                              | Spider, Center Direct, 5" Round       |            |          |                                    |               |                           |             |           |                       |                               |   |
|         |            |                               |                              | <b>SA</b>                             |            |          |                                    |               |                           |             |           |                       |                               |   |
|         |            |                               |                              | Side Arm                              |            |          |                                    |               |                           |             |           |                       |                               |   |

\* Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.


## Poles & Tenon Options

| POLE SPECIFICATION  |   |   |   | TENONS & BRACKETS   |   |   |  |
|---|---|---|---|---|---|---|--|
| Consult factory for more information.   |   |   |   |   |   |   |  |
|  |  |  |  |  |  |  |  |
| <b>PS</b><br>Crown-Weld® Square Straight Steel Poles                                | <b>PS5R</b><br>Round Steel Poles  | <b>PSCV</b><br>Curved Round Tapered Steel Poles                                     | <b>PSRV</b><br>Round Tapered Steel Poles  | <b>PB-*A</b><br>Square Internal Mount Vertical Tenons (Steel)                       | <b>PB-*R</b><br>Round External Mount Vertical Tenons (Steel)                        | <b>PD-*A4</b><br>Square Internal Mount Horizontal Tenons (Aluminum)                 | <b>PT-*</b><br>Round External Mount Horizontal Tenons (Aluminum)                     |
|   |   |   |   |   |   |   | <b>WM-*</b><br>Wall Mount Brackets   |
|   |   |   |   |   |   |   | <b>PW-*A3</b><br>Mid-Pole Brackets   |

## Dimensions
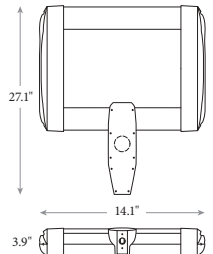
| CREE EDGE™ AREA SQUARE   | CREE EDGE™ AREA ROUND  |
|--|--|
| <p><b>DA MOUNT</b></p>  | <p><b>R3 MOUNT</b></p>  |

## Accessory Information

|   |  |
|---|--|
| <b>BIRD-SPIKES</b>                        |  |
| <b>XA-BRDSPK</b>                          |  |
| <b>BACKLIGHT SHIELD</b>                   |  |
| <b>XA-20BLS-4</b> Four-pack               |  |
| <b>HAND-HELD REMOTE</b>                   |  |
| <b>XA-SENSREM</b> For use with PML Option |  |

## You May Also Be Interested In:



**VG SERIES PARKING STRUCTURE**  
Scalable, Versatile Parking Structure Solutions



**CREE EDGE™ SERIES WALL MOUNT**  
Wall Mount Lighting Solutions



**CREE EDGE™ SERIES FLOOD**  
Flood Lighting Solutions

## Cree Edge™ High Output



Cree Edge™ High Output Area



## IT'S A BRAND NEW NIGHT IN HIGH OUTPUT LIGHTING

With no viable alternatives, projects that required high output and high mounting height solutions were left using technologies of the past. Today, the Cree Edge™ High Output luminaire is not only able to replace up to 1000W HID, it's significantly better. Powered by Cree TrueWhite® Technology, the Cree Edge™ High Output area and flood luminaire delivers uncompromising color for outdoor spaces. With 90+CRI, true-to-life color never looked so good.

### BENEFITS

- Improved illumination performance
- Significant energy and maintenance savings
- Eliminate the relamping cycle
- Standard 10-year limited warranty

### FEATURES

- Minimum 70 CRI (4000K & 5700K); 90 CRI (5000K)
- CCT: 5700K (+/- 500K standard), 5000K (+/- 300K), 4000K (+/- 300K)
- Utilizes Cree TrueWhite® Technology on 5000K luminaires
- Low-profile, modular design
- Rugged aluminum housing
- UL wet listed
- Exclusive Colorfast DeltaGuard® finish

### APPLICATIONS

- Airport, auto dealership, corporate & office, education, government & municipal, healthcare, industrial & warehouse, pedestrian & recreation, petroleum & convenience store, restaurant & hospitality, retail & grocery, roadway

# Cree Edge™ High Output










## Ordering Information

Example: ARE-EHO-3M-HV-12-E-UL-SV-700

| PRODUCT | FAMILY | OPTIC                               | MOUNTING                        | # OF LEDs (X10) | LED SERIES | VOLTAGE                     | COLOR OPTIONS | DRIVE CURRENT | FACTORY INSTALLED OPTIONS              |
|---------|--------|-------------------------------------|---------------------------------|-----------------|------------|-----------------------------|---------------|---------------|--|
| ARE     | EHO    | <b>2M</b><br>Type II Medium         | HV<br>Horizontal/Vertical Tenon | <b>12</b>       | E          | UL<br>Universal<br>120-277V | BK<br>Black   | <b>700</b>    | <b>40K</b><br>4000K CCT                |
|         |        | <b>2MB</b><br>Type II Medium w/BLS  |                                 | <b>24</b>       |            |                             |               | <b>1000</b>   | <b>50K</b><br>5000K CCT                |
|         |        | <b>3M</b><br>Type III Medium        |                                 |                 |            |                             |               | <b>1000mA</b> | <b>DIM</b><br>0-10V Dimming            |
|         |        | <b>3MB</b><br>Type III Medium w/BLS |                                 |                 |            |                             |               |               | <b>F</b><br>Fuse                       |
|         |        | <b>4M</b><br>Type IV Medium         |                                 |                 |            |                             |               |               | <b>ML</b><br>Multi-Level               |
|         |        | <b>4MB</b><br>Type IV Medium w/BLS  |                                 |                 |            |                             |               |               | <b>R</b><br>NEMA® Photocell Receptacle |
|         |        | <b>5M</b><br>Type V Medium          |                                 |                 |            |                             |               |               |  |
|         |        | <b>5S</b><br>Type V Short           |                                 |                 |            |                             |               |               |  |
|         |        | <b>AF</b><br>Automotive Frontline   |                                 |                 |            |                             |               |               |  |

\* Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.


## Poles & Tenon Options

| POLE SPECIFICATION  |   |   |   | TENONS & BRACKETS  |  |   |
|---|---|---|---|--|--|---|
| Consult factory for more information.   |   |   |   |  |  |   |
|  |  |  |  |    |   |  |
| <b>PS</b><br>Crown-Weld® Square Straight Steel Poles                                | <b>PS5R</b><br>Round Steel Poles  | <b>PSCV</b><br>Curved Round Tapered Steel Poles                                     | <b>PSRV</b><br>Round Tapered Steel Poles  | <b>PB-A</b><br>Square Internal Mount Vertical Tenons (Steel)                         | <b>PB-R</b><br>Round External Mount Vertical Tenons (Steel)                          | <b>WM-A</b><br>Wall Mount Brackets  |
|   |   |   |   |  |  | <b>PW-A3</b><br>Mid-Pole Brackets   |
|   |   |   |   |  |  | <b>EHO-UNV*</b><br>Direct Mount Brackets  |

## Dimensions

**CREE EDGE™ HIGH OUTPUT AREA**

**HV MOUNT**

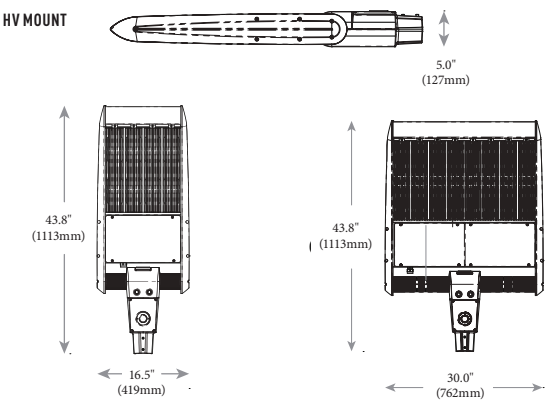

5.0" (127mm)

43.8" (1113mm)


16.5" (419mm)

30.0" (762mm)

## Accessory Information

**BIRD-SPIKES**

**XA-BRDSPKXAK12** (120 LEDs)  
**XA-BRDSPKXAK24** (240 LEDs)



**BACKLIGHT SHIELD**

**XA-30BLS-4** Four-pack (120 LEDs)      **XA-30BLS-8** Eight-pack (240 LEDs)

## You May Also Be Interested In:



**IG SERIES PARKING STRUCTURE**  
Parking Structure Solutions



**XSP SERIES WALL PACK**  
Affordable Site Lighting Solutions



**OSQ SERIES FLOOD**  
Flood Lighting Solutions

## Cree Edge™ Series Pathway



Cree Edge™ Pathway



## A PATHWAY TO STYLE AND PERFORMANCE.

Cree Edge™ Pathway luminaires combine style and performance to provide unmatched value in pathway and pedestrian lighting. Available in 13", 18", 36", 42" and 8' lengths, Cree Edge™ Pathway luminaires provide shadow-free illumination in both symmetric and asymmetric distribution patterns. In addition, its lens-free design means no yellowing lens or other lens-related issues that can be typical of more traditional designs. Cree Edge™ Pathway luminaires are simply designed to provide more than a decade of near maintenance-free service.

### BENEFITS

- Improved illumination performance
- Significant energy and maintenance savings
- Eliminate the relamping cycle
- Standard 10-year limited warranty

### FEATURES

- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- UL wet listed
- Two-level options
- Multiple height options:
  - 13" and 18" landscape fixture
  - 36" and 42" pathway fixture
  - 8' pedestrian fixture

### APPLICATIONS

- Airport, auto dealership, corporate & office, education, government & municipal, healthcare, industrial & warehouse, pedestrian & recreation, petroleum & convenience store, restaurant & hospitality, retail & grocery

## Cree Edge™ Series Pathway

## Ordering Information

Example: PWY-EDG-3M-P3-02-E-UL-BK-525-F

| PRODUCT | FAMILY       | OPTIC        | MOUNTING    | LED COUNT (X09) | LED SERIES        | VOLTAGE   | COLOR OPTIONS | DRIVE CURRENT | FACTORY INSTALLED OPTIONS |              |           |  |  |
|---------|--------------|--------------|-------------|-----------------|-------------------|-----------|---------------|---------------|---------------------------|--------------|-----------|--|--|
| PWY     | EDG          | <b>2M</b>    | <b>P0</b>   | <b>02</b>       | <b>E</b>          | <b>UL</b> | <b>SV</b>     | <b>350</b>    | <b>40K</b>                |              |           |  |  |
|         |              | Type 2       | 13" (330mm) |                 |                   |           |               |               |                           | Universal    | Sliver    | 350mA  | 4000K CCT                                      |
|         |              | Medium       | Landscape   |                 |                   |           |               |               |                           | 120-277V     | <b>BZ</b> | <b>525</b>                                       | <b>F</b>                                       |
|         |              | <b>3M</b>    | <b>P1</b>   |                 |                   |           |               |               |                           | 18" (457mm)  | Universal | Bronze   | Fuse   |
|         |              | Type 3       | 18" (457mm) |                 |                   |           |               |               |                           | 347-480V     | <b>BK</b> | <b>525</b>                                       | <b>HL</b>                                      |
|         |              | Medium       | Landscape   |                 |                   |           |               |               |                           | 120V         | Black     | High/Low (175/350/525, Dual Circuit Input)       |  |
|         |              | <b>5M</b>    | <b>P3</b>   |                 |                   |           |               |               |                           | 36" (914mm)  | <b>12</b> | <b>WH</b>  | <b>TL</b>                                      |
|         |              | Type 5       | 36" (914mm) |                 |                   |           |               |               |                           | 277V         | White     | Two-Level (175/525 w/ Integrated Sensor Control) |  |
|         |              | Medium       | Pathway     |                 |                   |           |               |               |                           |              | <b>27</b> | <b>TL2</b>                                       | Two-Level (0/350 w/ Integrated Sensor Control) |
|         |              | <b>5S</b>    | <b>P4</b>   |                 |                   |           |               |               |                           | 42" (1067mm) |           | <b>TL3</b>                                       | Two-Level (0/525 w/ Integrated Sensor Control) |
| Type 5  | 42" (1067mm) |              |             | <b>WB</b>       | Welded Base Plate |           |               |               |                           |              |           |  |  |
| Short   | Pathway      |              |             |                 |                   |           |               |               |                           |              |           |  |  |
|         | <b>P8</b>    | 96" (2438mm) |             |                 |                   |           |               |               |                           |              |           |  |  |
|         | Pedestrian   |              |             |                 |                   |           |               |               |                           |              |           |  |  |

\* Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Accessory Information


## UPGRADE KIT - USED FOR REPLACEMENT OF EXISTING BOLLARDS

**XA-XBP8RSV**  
Silver  
**XA-XBP8RBK**  
Black  
**XA-XBP8RWH**  
White  
**XA-XBP8RBZ**  
Bronze

## Dimensions

## CREE EDGE™ PATHWAY

**Landscape (P0)** 13" (330mm)  
**Landscape (P1)** 18" (457mm)  
**Pathway (P3)** 36" (914mm)  
**Pathway (P4)** 42" (1067mm)  
**Pedestrian (P8)** 96" (2438mm)



## You May Also Be Interested In:

**VG SERIES PARKING STRUCTURE**

Scalable, Versatile Parking Structure Solutions

**CREE EDGE™ SERIES WALL MOUNT**

Wall Mount Lighting Solutions

**CREE EDGE™ SERIES FLOOD**

Flood Lighting Solutions

## LED STREET & ROADWAY

Street lighting is an important and significant investment for most municipalities. Unfortunately, high energy and maintenance costs associated with operating HID systems offer no relief to already tight budgets. Cree® LED street light products provide budget-friendly solutions that significantly reduce energy and maintenance costs without sacrificing illumination performance. You get proven energy and maintenance savings from the proven lighting leader, Cree.







### RSW Series

p.96

- Utilizes Cree WaveMax™ Technology
- Efficacy: Up to 115 LPW
- CRI: 80 CRI
- CCT: 3000K (+/- 175K); 4000K (+/- 300K)
- UL wet listed



### LEDway® Series High Output

p.106

- Minimum 80 CRI (3000K); 70 CRI (4000K & 5700K)
- CCT: 3000K (+/-300K), 4000K (+/-300K), 5700K (+/-500K)
- Utilizes NanoOptic® Technology
- UL wet listed
- All aluminum housing



### RUL Series

p.98

- Minimum 70 CRI
- CCT: 4000K (+/- 300K)
- UL wet listed
- Improved illumination performance
- Significant energy and maintenance savings
- Easy Installation



### Cree Edge™ Series

p.108

- Minimum 70 CRI (4000K & 5700K); 90 CRI (5000K)
- CCT: 4000K (+/- 300K), 5000K (+/- 300K), 5700K (+/- 500K)
- UL wet listed
- Mounting options: direct, catenary or pendant



### XSP Series

p.100

- Minimum 70 CRI
- CCT: 3000K (+/-300K), 4000K (+/-300K), 5700K (+/-500K)
- NanoOptic® Precision Delivery Grid™ optic
- UL wet listed



### XSP Series High Output

p.102

- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- NanoOptic® Precision Delivery Grid™ optic
- UL wet listed
- Increased lumen output



### LEDway® Series

p.104

- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- Exclusive Colorfast DeltaGuard® Finish
- UL wet listed
- All aluminum housing

## RSW Series



RSW Series



## WARM COLOR WITH COOL SAVINGS.

The Cree® RSW Series, utilizing WaveMax™ Technology, will transform the way cities and municipalities light their residential streets, interchanges, and expressways. With the first viable LED streetlight at warm CCT, the RSW Series delivers up to 115 LPW, enhanced visual comfort with reduced glare and high color contrast leading to improved overall illumination using less energy. The RSW Series provides warm, inviting dark sky friendly lighting that makes good economic sense.

### BENEFITS

- Warmer CCT without sacrificing efficacy
- Improves visual comfort (less glare)
- Significant energy and maintenance savings
- Eliminate the relamping cycle
- Field Adjustable Output option for increased flexibility
- Ease of installation
- 10-year limited warranty

### FEATURES

- CCT: 3000K (+/- 175K); 4000K (+/- 300K)
- CRI: 80 CRI
- WaveMax™ Technology
- UL wet listed
- Traditional cobra head appearance
- Lightweight luminaire - 6.5 lbs. (2.9kg)

### APPLICATIONS

- Government, Municipal & Roadway

# RSW Series

## Ordering Information

Example: RSW-HT-2ME-30W-30K-UL-UF-N


| PRODUCT | MOUNTING                  | OPTIC  | INPUT POWER              | CCT                          | VOLTAGE                     | COLOR OPTIONS | UTILITY LABEL/RECEPTACLE   | OPTIONS                   |
|---------|---------------------------|--|--------------------------|------------------------------|-----------------------------|---------------|--|---------------------------|
| RSW     | HT<br>Horizontal<br>Tenon | 2ME*<br>Type II<br>Medium<br>2LG*<br>Type II<br>Long<br>3ME*<br>Type III<br>Medium | 30W<br>30W<br>50W<br>50W | 30K<br>3000K<br>40K<br>4000K | UL<br>Universal<br>120-277V | GY<br>Grey    | N Utility Label and NEMA®<br>Photocell Receptacle<br>- External WattaGE label per ANSI C136.15<br>- 7-pin receptacle per ANSI C136.41<br>- Factory connected 0-10V dim leads<br>- Photocell and shorting cap by others | Q Field Adjustable Output |

\*Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Dimensions

### RSW SERIES

#### SMALL




For information on higher WattaGE versions of the RSW, please contact your Cree representative.


## Mounting Options

### POLE SPECIFICATION

Consult factory for more information.



**PS**  
Crown-Weld® Square  
Straight Steel Poles



**PSSR**  
Round Steel Poles



**PSRV**  
Round Tapered  
Steel Poles

### TENONS & BRACKETS



**PD-\*H4**  
Square Internal Mount Horizontal Tenons (Steel) - Mounts to 4" (102mm) square aluminum or steel poles



**PT-\*H**  
Round External Mount Horizontal Tenons (Aluminum) - Mounts to 2.375" - 3" (60-76mm) O.D. round aluminum or steel poles or tenons; Mounts to square pole with PB-1A\* tenon



**WM-2L**  
Extended Horizontal Wall Mount Bracket - Mounts to wall, roof or side of wood pole



**XA-TMDA8**  
Direct Arm Pole Adaptor Bracket - Mounts to 3 - 6" (76 - 152mm) round or square aluminum or steel poles

\* Specify mounting configuration.

## Accessory Information

| BIRD GUARD  | BACKLIGHT CONTROL SHIELD                        |
|-------------|---|
| RSW-BRDGRDS | RSW-BLSS<br>- Provides 1 mounting height cutoff |

## You May Also Be Interested In:



**OSQ SERIES™ FLOOD**  
Flood Lighting Solutions



**XSPW™ LED WALL MOUNT**  
Sleek, Modular Area Lighting Solutions



**XSP SERIES STREET LIGHT**  
High-Efficiency Street Light Solutions

## RUL Series Rural Utility Luminaire



RUL Series



## SUPERIOR UTILITY LED LIGHTING FOR LESS

The LED Rural Utility Luminaire provides innovation through LED technology that maximizes both the total cost of ownership and return on investment for end users requiring a 70-100W HPS or 100-175W Mercury Vapor replacement solution. By providing industry-leading efficacy of 110 lumens per watt and an industry-leading 10-year limited warranty, Cree is changing the assumptions associated with purchasing and maintaining utility and residential security lighting. While its lightweight design, tool-less entry, and easy installation make the RUL™ LED Rural Utility Luminaire an ideal solution for any contractor.

### BENEFITS

- Improved illumination performance
- Significant energy and maintenance savings
- Easy Installation
- Standard 10-year limited warranty

### FEATURES

- Minimum 70 CRI
- CCT: 4000K (+/- 300K)
- UL wet listed
- Meets CALTrans 611 Vibration Testing
- Certified to ANSI C136.31-2001, 3G Bridge and Overpass Vibration
- 10K surge suppression protection tested in accordance with IEEE/ANSI C62.41.2

### APPLICATIONS

- Industrial & Warehouse, Municipal, Government, Retail & Grocery, Roadway

## RUL Series Rural Utility Luminaire

## Ordering Information


Example: RUL-HT-2ME-C-40K-12-UF-N

| PRODUCT | MOUNTING                  | OPTIC   | INPUT POWER DESIGNATOR | CCT          | VOLTAGE    | COLOR OPTIONS         | UTILITY LABEL/RECEPTACLE  | OPTIONS  |
|---------|---------------------------|---|------------------------|--------------|------------|-----------------------|---|--|
| RUL     | HT<br>Horizontal<br>Tenon | 2ME<br>Type II<br>Medium<br>5ME<br>Type V<br>Medium | C<br>50W               | 40K<br>4000K | 12<br>120V | UF<br>Grey Unfinished | N Utility Label and NEMA®<br>Photocell Receptacle<br>- Photocell by others<br>- 3-pin receptacle per ANSI C136.10<br>- Label per ANSI C136.15 | ES<br>10kV surge suppression protection<br><br><b>ES-K1 Utility Kit</b><br>Includes: 10kV surge suppression protection, long-life photocell, 24" arm mount and 5' cord (pre-installed)<br><br><b>ES-K2 Utility Kit</b><br>Includes: 10kV surge suppression protection, long-life photocell, 24" arm mount, NEMA® style reflector/refractor and 5' cord (pre-installed) |

\*Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Dimensions

## RUL SERIES RURAL UTILITY LUMINAIRE

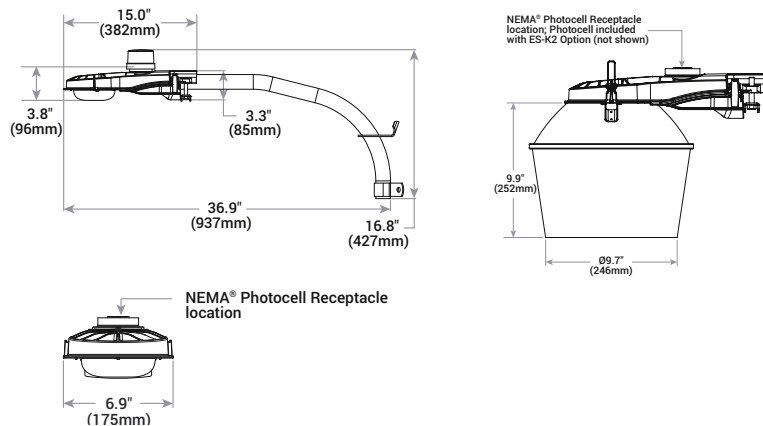

## Mounting Options

## TENON S &amp; BRACKETS

\* Consult factory for more information.



**PD-A**  
Square Internal Mount Horizontal Tenons (Aluminum)  
- Mounts to 4" (102mm) square aluminum or steel poles



**PT-\***  
Round External Mount Horizontal Tenons (Aluminum)  
- Mounts to 2.375"-3" (60-76mm) O.D. round aluminum or steel poles or tenons



**RUL-ARM24**  
Pole Mounting Kit  
- 24.0" (610mm) curved raw aluminum arm  
- Includes zinc-plated steel hardware  
- Mounts to wood poles



**WM-2 (Horizontal)**  
Wall Mount Bracket  
- Mounts to wall, roof or side of wood pole



**XA-TMDA8**  
Direct Arm Pole Adaptor Bracket  
- Mounts to 3-6" (76-152mm) round or square aluminum or steel poles

## You May Also Be Interested In:



**OSQ SERIES™ FLOOD**  
Flood Lighting Solutions



**XSPW™ LED WALL MOUNT**  
Sleek, Modular Area Lighting Solutions



**XSP SERIES STREET LIGHT**  
High-Efficiency Street Light Solutions

## XSP Series Street Lights



## THE SHAPE YOU KNOW WITH THE PERFORMANCE YOU NEED.

Designed to resemble traditional cobra heads but with the performance only a Cree® LED solution can provide, the XSP Series is the result of a from-the-ground-up design that provides amazing illumination performance and value at the street level. Beyond substantial energy and maintenance savings, Cree achieves better optical control with our NanoOptic® Precision Delivery Grid™ optic than other street lighting solutions. The Cree XSP Series street light is an affordable LED solution that doesn't sacrifice performance.

### BENEFITS

- Significant energy and maintenance savings
- Eliminate the relamping cycle
- Field Adjustable Output option for increased flexibility
- 10-year limited warranty

### FEATURES

- Minimum 70 CRI
- CCT: 3000K (+/-300K), 4000K (+/-300K), 5700K (+/-500K)
- NanoOptic® Precision Delivery Grid™ optic
- Exclusive Colorfast DeltaGuard® Finish
- Traditional cobra head appearance
- UL wet listed

### APPLICATIONS

- Government & municipal, roadway

XSP1™ (single-module)



XSP2™ (double-module)



XSPR™



# XSP Series Street Lights

## Ordering Information

Example: BXSP-B-HT-2ME-A-40K-UL-SV








| PRODUCT       | VERSION | MOUNTING                  | OPTIC  | INPUT POWER DESIGNATOR  | CCT  | VOLTAGE  | COLOR OPTIONS                               | OPTIONS  |
|---------------|---------|---------------------------|--|---|--|--|---|--|
| BXSP<br>BXSPR | B<br>C  | HT<br>Horizontal<br>Tenon | 2ME**<br>Type II Medium<br>2LC**<br>Type II Long<br>3ME**<br>Type III Medium<br>4ME**<br>Type IV Medium<br>5ME<br>Type V Medium<br>5SH<br>Type V Short | A<br>53W (XSP1, B)<br>54W (XSPR)<br>B<br>101W (XSP2, B)<br>E<br>101W (XSP1, C)<br>F<br>139W (XSP2, C) | 30K<br>3000K<br>40K<br>4000K<br>57K<br>5700K | UL<br>Universal<br>120-277V<br>UH<br>Universal<br>347-480V | BK<br>Black<br>BZ<br>Bronze<br>SV<br>Silver | ML<br>Multi-Level<br>N<br>Utility Label and NEMA® Photocell Receptacle<br>O9<br>Field Adjustable Output<br>R<br>NEMA® Photocell Receptacle |

| PRODUCT | VERSION | MOUNTING                 | OPTIC   | MODULE (CCT)             | INPUT POWER          | VOLTAGE                    | COLOR OPTIONS | OPTIONS   |
|---------|---------|--------------------------|---|--------------------------|----------------------|----------------------------|---------------|---|
| BXSPR   | A       | O<br>Horizontal<br>Tenon | 1** Type II Long<br>2** Type II Medium<br>3** Type III Medium | F<br>4000K<br>M<br>5700K | C<br>42W<br>G<br>25W | U<br>Universal<br>120-277V | S<br>Silver   | N<br>Utility Label and NEMA® Photocell Receptacle |

\*Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

\*\*Available with Backlight Shield when ordered with field-installed accessory

## Mounting Options

| POLE SPECIFICATION   | TENONS & BRACKETS   |
|--|---|
| Consult factory for more information.  |   |
|  <p><b>PS</b><br/>Crown-Weld® Square Straight Steel Poles</p> |  <p><b>PD-H4</b><br/>Square Internal Mount Horizontal Tenons (Steel) - Mounts to 4" (102mm) square aluminum or steel poles</p>   |
|  <p><b>PSSR</b><br/>Round Steel Poles</p>                     |  <p><b>PT-H</b><br/>Round External Mount Horizontal Tenons (Aluminum) - Mounts to 2.375"-3" (60-76mm) O.D. round aluminum or steel poles or tenons</p>                       |
|  <p><b>PSRV</b><br/>Round Tapered Steel Poles</p>             |  <p><b>WM-2L</b><br/>Extended Horizontal Wall Mount Bracket - Mounts to wall, roof or side of wood pole</p>  |
|  |  <p><b>XA-TMDA8</b><br/>Direct Arm Pole Adaptor Bracket - Mounts to 3 - 6" (76 - 152mm) round or square aluminum or steel poles</p> <p>* Specify mounting configuration.</p> |


## Accessory Information

| BIRD SPIKE OPTIONS  | BACKLIGHT CONTROL SHIELD OPTIONS   | FOUR POINT MOUNTING KIT  |
|---|--|--|
| <p><b>XA-SP1BRDSPK**</b><br/>(single-module)</p> <p><b>XA-SP2BRDSPK**</b><br/>(double-module)</p> | <p>Provides 1/2 Mounting Height Cutoff</p> <p><b>XA-SP1BLS</b> (for use with single-module)</p> <p><b>XA-SP2BLS</b> (for use with double-module)</p> | <p><b>XA-XSP4PTMNT**</b></p> <p>Includes large bracket for mounting to 2" (51mm) IP, 2.375" (60mm) O.D. tenon, small bracket for mounting to 1.25" (32mm) IP, 1.66" (42mm) O.D. tenon and mounting bolts</p> |


\*\*does not apply to XSPR.

## Dimensions


**XSP1™ (SINGLE-MODULE)**

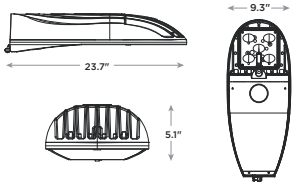


**XSP2™ (DOUBLE-MODULE)**

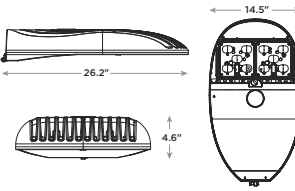

**XSPR™**

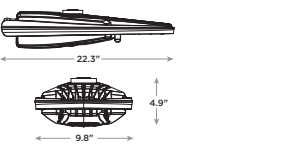

## You May Also Be Interested In:



**DPT SERIES POST-TOP LUMINAIRE**  
Easily Convert Decorative Street Lights to LED



**LEDWAY® SERIES STREET LIGHTS**  
Versatile Street Light Solutions



**XSP SERIES AREA**  
Area Lighting Solutions

## XSP Series High Output Street Lights



XSP1™ High Output (single-module)



XSP2™ High Output (double-module)



XSPR™ High Output



## THE SHAPE YOU KNOW WITH THE PERFORMANCE YOU NEED.

We've increased the lumen output for the successful XSP Series. The XSP High Output Series shares the same cobrahead style housing as the XSP Series, but delivers up to 18,523 lumens with incredible efficiency and illumination performance you need. In addition to substantial energy and maintenance savings, the XSP High Output Series achieves better optical control with the NanoOptic® Precision Delivery Grid™ optic over incumbent street lighting solutions from 70W up to 250W.

### BENEFITS

- Improved illumination performance
- Significant energy and maintenance savings
- Eliminate the relamping cycle
- Smart-city ready for increased flexibility
- 10-year limited warranty

### FEATURES

- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- NanoOptic® Precision Delivery Grid™ optic
- Exclusive Colorfast DeltaGuard® Finish
- Traditional cobra head appearance
- UL wet listed

### APPLICATIONS

- Government & municipal, roadway



# XSP Series High Output Street Lights








## Ordering Information

Example: BXSP1-HO-HT-2ME-100W-40K-UL-SV

| PRODUCT  | MOUNTING               | OPTIC                   | INPUT POWER    | CCT   | VOLTAGE                     | COLOR OPTIONS                               | OPTIONS   |
|----------|------------------------|-------------------------|----------------|-------|-----------------------------|---|---|
| BXSP1-HO | HT<br>Horizontal Tenon | 2ME*                    | 100W           | 40K   | UL<br>Universal<br>120-277V | BK<br>Black<br>BZ<br>Bronze<br>SV<br>Silver | N<br>Utility Label and NEMA Photocell Receptacle<br>O9<br>Field Adjustable Output<br>R<br>NEMA Photocell Receptacle |
|          |                        | Type II Medium          | 100W (XSP1-HO) | 4000K |                             |   |   |
|          |                        | 2LG*                    | 165W           | 57K   |                             |   |   |
|          |                        | Type II Long            | 165W (XSP2-HO) | 5700K |                             |   |   |
|          |                        | 3ME*                    |                |       |                             |   |   |
|          |                        | Type III Medium         |                |       |                             |   |   |
|          |                        | 4ME*                    |                |       |                             |   |   |
|          |                        | Type IV Medium          |                |       |                             |   |   |
| BXSPR-HO | HT<br>Horizontal Tenon | 2ME*                    | 60W            | 40K   | UL<br>Universal<br>120-277V | SV<br>Silver                                | N<br>Utility Label and NEMA Photocell Receptacle  |
|          |                        | Type II Medium          | 60W            | 4000K |                             |   |   |
|          |                        | 2LG*                    | 80W            | 57K   |                             |   |   |
|          |                        | Type II Long            | 80W            | 5700K |                             |   |   |
|          |                        | 3ME*                    |                |       |                             |   |   |
|          |                        | Type III Medium         |                |       |                             |   |   |
|          |                        | 5SH                     |                |       |                             |   |   |
|          |                        | Type V Short (60W only) |                |       |                             |   |   |

\*Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.  
 \*\*Available with Backlight Shield when ordered with field-installed accessory

## Mounting Options




| POLE SPECIFICATION   | TENONS & BRACKETS   |
|--|---|
| Consult factory for more information.  |   |
|  |    |
| <b>PS</b><br>Crown-Weld® Square Straight Steel Poles                               | <b>PD-H4</b><br>Square Internal Mount Horizontal Tenons (Steel) - Mounts to 4" (102mm) square aluminum or steel poles                         |
|  |    |
| <b>PS5R</b><br>Round Steel Poles   | <b>PT-H</b><br>Round External Mount Horizontal Tenons (Aluminum) - Mounts to 2.375"-3" (60-76mm) O.D. round aluminum or steel poles or tenons |
|  |    |
| <b>PSRV</b><br>Round Tapered Steel Poles   | <b>WM-2L</b><br>Extended Horizontal Wall Mount Bracket - Mounts to wall, roof or side of wood pole  |
|  |    |
|  | <b>XA-TMDA8</b><br>Direct Arm Pole Adaptor Bracket - Mounts to 3 - 6" (76 - 152mm) round or square aluminum or steel poles                    |
|  | * Specify mounting configuration.   |

## Accessory Information

| BIRD SPIKE OPTIONS                       | BACKLIGHT CONTROL SHIELD OPTIONS              |
|--|---|
| <b>XA-SP1BRDSPK**</b><br>(single-module) | Provides 1/2 Mounting Height Cutoff           |
| <b>XA-SP2BRDSPK**</b><br>(double-module) | <b>XA-SP1BLS</b> (for use with single-module) |
|  | <b>XA-SP2BLS</b> (for use with double-module) |
|  | <b>XA-SPR3BLS</b> (for use with XSPR, 60W)    |
|  | <b>XA-SPRBLs</b> (for use with XSPR, 80W)     |

\*\*does not apply to XSPR.

## Dimensions
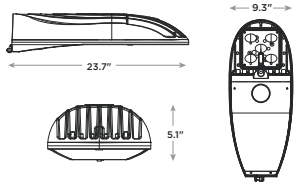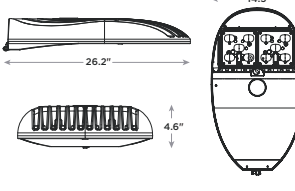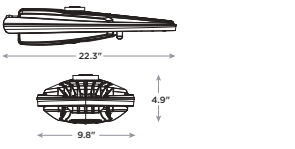
| XSP1-HO (SINGLE-MODULE)  | XSP2-HO (DOUBLE-MODULE)  |
|--|--|
|   |  |
|  |  |

## You May Also Be Interested In:



**DPT SERIES POST-TOP LUMINAIRE**  
Easily Convert Decorative Street Lights to LED



**LEDWAY® SERIES STREET LIGHTS**  
Versatile Street Light Solutions



**XSP SERIES AREA**  
Area Lighting Solutions

## LEDway® Series Street Lights



LEDway - HT Mount



## PROVEN PERFORMANCE, PROVEN VALUE.

Launched in 2008, LEDway® LED street lights are arguably the most successful street light in the world. Our LEDway street light has built a reputation based on performance and value. Available in 10-LED increments (20 to 120 LEDs), flexible drive currents and multiple optical distributions, the LEDway street light can be "right-sized" to provide exacting illumination performance that minimizes first cost while maximizing energy savings. While others can make performance promises, the LEDway street light has already delivered proven performance.

### BENEFITS

- Improved illumination performance
- Significant energy and maintenance savings
- Eliminate the relamping cycle
- Standard 10-year limited warranty

### FEATURES

- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- Patented NanoOptic® Technology
- Exclusive Colorfast DeltaGuard® Finish
- UL wet listed
- Meets CALTrans 611 Vibration Testing
- Certified to ANSI C136.31-2001, 3G Bridge and Overpass Vibration Standards
- 10K surge suppression protection tested in accordance with IEEE/ANSI C62.41.2
- Field adjustable power conditions
- Remote monitoring compatibility
- Scalable design

### APPLICATIONS

- Airports, auto dealerships, corporate & office, education, government & municipal, healthcare, pedestrian & recreation, petroleum & convenience store, restaurant & hospitality, retail & grocery, roadway

# LEDway® Series Street Lights

## Ordering Information

Example: STR-LWY-4M-HT-06-E-UL-SV-700-IP


| PRODUCT | OPTIC                        | MOUNTING               | #OF LEDS (X10) | LED SERIES | VOLTAGE                     | COLOR OPTIONS | DRIVE CURRENT       | FACTORY INSTALLED OPTIONS   |                             |                     |  |                         |
|---------|------------------------------|------------------------|----------------|------------|-----------------------------|---------------|---------------------|-----------------------------|-----------------------------|---------------------|--|-------------------------|
| STR-LWY | <b>2M</b><br>Type I Medium   | HT<br>Horizontal Tenon | <b>02</b>      | E          | UL<br>Universal<br>120-277V | BK<br>Black   | <b>525</b><br>525mA | <b>DIM</b><br>0-10V Dimming |                             |                     |  |                         |
|         | <b>2S</b><br>Type II Short   |                        | <b>03</b>      |            |                             |               |                     |                             | <b>BZ</b><br>Bronze         | <b>700</b><br>700mA | <b>R</b><br>NEMA® Photocell Receptacle |                         |
|         | <b>3M</b><br>Type III Medium |                        | <b>04</b>      |            |                             |               |                     |                             | UH<br>Universal<br>347-480V | <b>SV</b><br>Silver |  | <b>40K</b><br>4000K CCT |
|         | <b>4M</b><br>Type IV Medium  |                        | <b>05</b>      |            |                             |               |                     |                             |                             |                     |  |                         |
|         | <b>5M</b><br>Type V Medium   |                        | <b>06</b>      |            |                             |               |                     |                             |                             |                     |  |                         |
|         |                              |                        | <b>07</b>      |            |                             |               |                     |                             |                             |                     |  |                         |
|         |                              |                        | <b>08</b>      |            |                             |               |                     |                             |                             |                     |  |                         |
|         |                              |                        | <b>09</b>      |            |                             |               |                     |                             |                             |                     |  |                         |
|         |                              |                        | <b>10</b>      |            |                             |               |                     |                             |                             |                     |  |                         |
|         |                              |                        | <b>11</b>      |            |                             |               |                     |                             |                             |                     |  |                         |
|         |                              |                        | <b>12</b>      |            |                             |               |                     |                             |                             |                     |  |                         |

\*Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Dimensions


### LEDWAY® LED STREET LIGHT

#### HT MOUNT



## Accessory Information

### BIRD SPIKE OPTIONS



**XA-BRDSPKHSG**  
(for use with LEDway® housings)  
**XA-BRDSPK30**  
(for use with 20 to 30 LED light engines)  
**XA-BRDSPK60**  
(for use with 40 to 60 LED light engines)

**XA-BRDSPK90**  
(for use with 70 to 90 LED light engines)  
**XA-BRDSPK120**  
(for use with 100 to 120 LED light engines)


### EXTERNAL BACKLIGHT SHIELD OPTIONS

**XA-XSLBLS30**  
(for use with 20 to 30 LED luminaires)  
**XA-XSLBLS60**  
(for use with 40 to 60 LED luminaires)  
**XA-XSLBLS90**  
(for use with 70 to 90 LED luminaires)  
**XA-XSLBLS120**  
(for use with 100 to 120 LED luminaires)


## Mounting Options

### POLE SPECIFICATION

Consult factory for more information.



**PS**  
Crown-Weld® Square  
Straight Steel Poles



**PSSR**  
Round Steel Poles



**PSRV**  
Round Tapered  
Steel Poles

### TENONS & BRACKETS



**PD-\*H4**  
Square Internal Mount Horizontal Tenons (Steel) - Mounts to 4" (102mm) square aluminum or steel poles



**PT-\*H**  
Round External Mount Horizontal Tenons (Aluminum) - Mounts to 2.375"-3" (60-76mm) O.D. round aluminum or steel poles or tenons; Mounts to square pole with PB-1A\* tenon



**WM-2L**  
Extended Horizontal Wall Mount Bracket - Mounts to wall, roof or side of wood pole



**XA-TMDA8**  
Direct Arm Pole Adaptor Bracket - Mounts to 3 - 6" (76 - 152mm) round or square aluminum or steel poles

\* Specify mounting configuration.

## You May Also Be Interested In:



**IG SERIES PARKING STRUCTURE**  
Parking Structure Solutions



**DPT SERIES POST-TOP LUMINAIRE**  
Easily Convert Decorative Street Lights to LED



**CREE EDGE™ TSP TRANSPORTATION MOUNT**  
Bridge, Overpass & Tunnel Lighting Solutions

## LEDway® Series High Output Street Lights



High Output - Single



High Output - Double



## MEETING DEMANDING ROADWAY APPLICATION REQUIREMENTS.

The LEDway® Series High Output street light with its unrivaled lumen output for roadway lighting expands the application range replacing up to 400W HPS. With industry-leading optimized optical control and adjustable output for versatility, the LEDway Series High Output street light significantly improves the economic value for the application.

### BENEFITS

- Improved illumination performance
- Significant energy and maintenance savings
- Eliminate the relamping cycle
- Standard 10-year limited warranty

### FEATURES

- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- Patented NanoOptic® Technology
- Exclusive Colorfast DeltaGuard® Finish
- UL wet listed
- Vibration standards
- 10K surge suppression protection tested in accordance with IEEE/ANSI C62.41.2
- Optional field adjustable power conditions
- Remote monitoring compatibility
- Scalable design

### APPLICATIONS

- Airports, auto dealerships, corporate & office, education, government & municipal, healthcare, pedestrian & recreation, petroleum & convenience store, restaurant & hospitality, retail & grocery, roadway

# LEDway® Series High Output Street Lights

## Ordering Information


Example: STR-LWY-2ME-HT-1-F-UL-SV-A-40K

| PRODUCT | OPTIC   | MOUNTING                      | MODULE   | SERIES   | VOLTAGE  | COLOR OPTIONS  | INPUT POWER DESIGNATOR   | CCT   | FACTORY INSTALLED OPTIONS   |
|---------|---|-------------------------------|--|----------|--|--|--|---|---|
| STR LWY | <b>2ME</b><br>Type II Medium<br><b>2LG</b><br>Type II Long<br><b>3ME</b><br>Type III Medium<br><b>4ME</b><br>Type IV Medium | <b>HT</b><br>Horizontal Tenon | <b>1</b><br>Single Module<br><b>2</b><br>Double Module | <b>F</b> | <b>UL</b><br>Universal 120-277V<br><b>UH</b><br>Universal 347-480V | <b>BK</b><br>Black<br><b>BZ</b><br>Bronze<br><b>SV</b><br>Silver<br><b>WH</b><br>White | <b>A</b><br>Single Module 136W<br><b>Double Module</b><br>274W | <b>30K</b><br>3000K<br><b>40K</b><br>4000K<br><b>57K</b><br>5700K | <b>DIM</b><br>0-10V Dimming<br><b>F</b><br>Fuse<br><b>N</b><br>No Quick Disconnect Harness or Leveling Bubble<br><b>PD</b><br>Power Door<br><b>Q</b><br>Field Adjustable Output<br><b>R</b><br>NEMA® Photocell Receptacle<br><b>SC</b><br>Door Safety Tether<br><b>UTL</b><br>Utility |


\*Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Mounting Options

### POLE SPECIFICATION



**PS**  
Crown-Weld® Square Straight Steel Poles



**PSR**  
Round Steel Poles



**PSRV**  
Round Tapered Steel Poles

### TENONS & BRACKETS



**PD-\*H4**  
Square Internal Mount Horizontal Tenons (Steel) - Mounts to 4" (102mm) square aluminum or steel poles



**PT-\*H**  
Round External Mount Horizontal Tenons (Aluminum) - Mounts to 2.375"-3" (60-76mm) O.D. round aluminum or steel poles or tenons; Mounts to square pole with PB-1A\* tenon



**WM-2L**  
Extended Horizontal Wall Mount Bracket - Mounts to wall, roof or side of wood pole





**XA-TMDA8**  
Direct Arm Pole Adaptor Bracket - Mounts to 3 - 6" (76 - 152mm) round or square aluminum or steel poles

\* Specify mounting configuration.

## Dimensions

### LEDWAY SERIES HIGH OUTPUT STREET LIGHT



| MODULES | DIMENSION | MEASUREMENTS  |
|---------|-----------|---------------|
| Single  | "A"       | 23.5" (597mm) |
| Double  | "A"       | 34.9" (886mm) |

## You May Also Be Interested In:



**OSQ SERIES AREA**  
Low-Profile Area Lighting Solutions



**XSP SERIES WALL PACK**  
Affordable Site Lighting Solutions




**CREE EDGE™ TSP TRANSPORTATION MOUNT**  
Bridge, Overpass & Tunnel Lighting Solutions

## Accessory Information

### BIRD SPIKE OPTIONS

**XA-BRDSPKHSG**  
Bird Spikes for Housing



## Cree Edge™ Series Transportation Luminaire



Cree Edge™ Transportation Mount

Cree Edge™ High Output Transportation Mount



## BRIDGES, OVERPASSES AND TUNNELS — NO PROBLEM.

The Cree Edge™ TSP Transportation Mount is designed for high vibration areas such as bridges, overpasses, roadways and tunnels and helps reduce costs associated with maintaining high-traveled areas. Visibility and safety for vehicular and pedestrian traffic can be dramatically increased with overall improvements in illumination performance.

### BENEFITS

- Increased visibility and safety for pedestrians and vehicles
- Lower maintenance costs

### FEATURES

- Mounting options: direct, catenary or pendant
- UL and cUL listed
- Through-wiring for easy installation
- 10kV surge suppression protection tested in accordance with IEEE/ANSI C62.41.2

### APPLICATIONS

- Government & municipal, roadway

# Cree Edge™ Series Transportation Luminaire

## Ordering Information


Example: TSP-EDG-2M-DM-06-E-UL-SV-525-DIM

| PRODUCT | OPTIC                 | MOUNTING                  | # OF LEDs (X10)            | VERSION | VOLTAGE | COLOR OPTIONS   | DRIVE CURRENT | FACTORY INSTALLED OPTIONS                       |
|---------|-----------------------|---------------------------|----------------------------|---------|---------|-----------------|---------------|---|
| TSP EDG | 1S<br>Type I Short    | PS<br>Petroleum Symmetric | DM<br>Direct Mount         | 04      | E       | UL<br>Universal | SV<br>Sliver  | 40K<br>4000K CCT                                |
|         | 2M<br>Type II Medium  | 15<br>15-degree Flood     | PD1<br>1-1/4 NPSM Mounting | 06      |         | 120-277V        | BZ<br>Bronze  | DIM<br>0-10V Dimming                            |
|         | 2S<br>Type II Short   | 25<br>25-degree Flood     | 10<br>System               | 08      |         | Universal       | BK<br>Black   | F<br>Fuse                                       |
|         | 3M<br>Type III Medium | 40<br>40-degree Flood     | 12<br>1-1/2 NPSM Mounting  | 10      |         | 347-480V        | WH<br>White   | HL<br>High/Low (175/350/525 Dual Circuit Input) |
|         | 4M<br>Type IV Medium  |                           | 14<br>System               | 12      |         | 250VDC          |               |   |
|         | 5M<br>Type V Medium   |                           | 16<br>CM Catenary Mount    | 14      |         |                 |               |   |
|         | 5S<br>Type V Short    |                           |                            | 16      |         |                 |               |   |
|         |                       |                           |                            | 24      |         |                 |               |   |
|         |                       |                           |                            |         |         |                 |               |   |
|         |                       |                           |                            |         |         |                 |               |   |
| PRODUCT | OPTIC                 | MOUNTING                  | # OF LEDs (X10)            | VERSION | VOLTAGE | COLOR OPTIONS   | DRIVE CURRENT | FACTORY INSTALLED OPTIONS                       |
| TSP EHO | 1S<br>Type I Short    | 5S<br>Type V Short        | DM<br>Direct Surface       | 12      | E       | UL<br>Universal | SV<br>Sliver  | 40K<br>4000K CCT                                |
|         | 2S<br>Type II Short   | N6<br>NEMA® 6             |                            | 24      |         | 120-277V        | BZ<br>Bronze  | 50K<br>5000K CCT                                |
|         | 3M<br>Type III Medium |                           |                            |         |         | Universal       | BK<br>Black   | DIM<br>0-10V Dimming                            |
|         |                       |                           |                            |         |         | 347-480V        | WH<br>White   | F<br>Fuse                                       |
|         |                       |                           |                            |         |         |                 |               | ML<br>Multi-Level                               |

\*Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Dimensions

### CREE EDGE™ TRANSPORTATION MOUNT

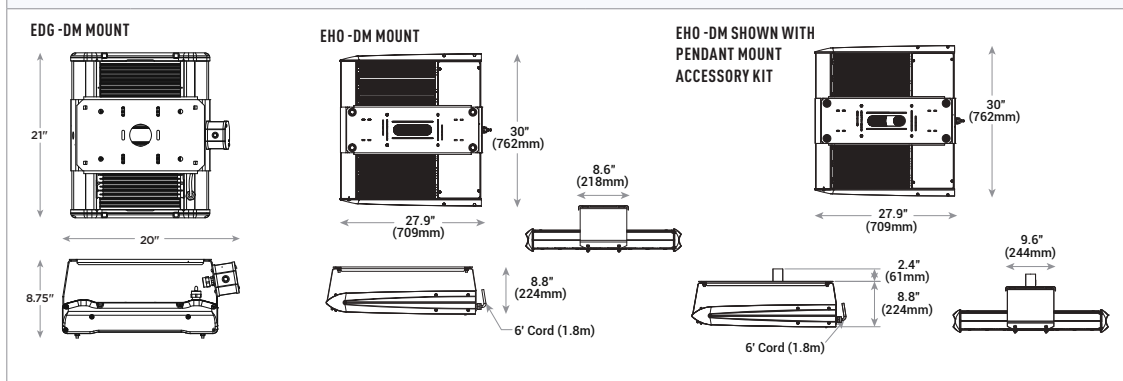

## Accessory Information

### ACCESSORIES FOR HIGH OUTPUT

- EHO-HC**  
Hook & Cord Mount Kit
- EHO-PD1**  
Pendant 1-1/4" NPSM Mount Kit
- EHO-PD2**  
Pendant 1-1/2" NPSM Mount Kit

## You May Also Be Interested In:



**VG SERIES PARKING STRUCTURE**  
Scalable, Versatile Parking Structure Solutions



**CREE EDGE™ SERIES WALL MOUNT**  
Wall Mount Lighting Solutions



**CREE EDGE™ SERIES FLOOD**  
Flood Lighting Solutions

## LED DECORATIVE STREET & ROADWAY

With the Cree® LED lighting solutions, there is no need to change the historical ambiance of the streetscape. You can simply transform existing inefficient metal halide, high pressure sodium and mercury vapor post-top luminaires into energy-efficient, low-maintenance LED luminaires. The result is improved optical control and target efficacy that combines a classic day-form style with a beautiful nightscape appearance.







### DPT Series LED Post-Top Luminaire

p.112

- Minimum 70 CRI
- CCT: 3000K (+/- 300K); 4000K (+/- 300K)
- Made with Cree® LED Technology
- Utilizes a standalone UL 1598 compliant light engine
- Suitable for damp locations
- 6kV surge suppression protection tested in accordance with IEEE/ANSI C62.41.2



### LED Upgrade Kit

p.114

- Minimum 70 CRI
  - CCT: 2700K (+/-300K), 4000K (+/-300K)
  - 0-10V dimming option
  - Field Adjustable Output for increased flexibility
  - Reuses most of existing luminaire for little waste
-

## DPT Series Post-Top Luminaire



DPT Series Post-Top Luminaire



## MAINTAIN YOUR DAY FORM. MODERNIZE THE POST-TOP WITH EASE.

Don't get fooled into purchasing new luminaires or losing compliance with other decorative post-top lighting solutions. With the DPT Series, you can have all the great benefits of performance, energy savings and reduced maintenance of a LED luminaire, because it's designed to be a "luminaire within a luminaire." Designed to replace up to 70W Metal Halide or High Pressure Sodium and up to 175W Mercury Vapor lamps, the DPT luminaire utilizes a standalone UL 1598 compliant light engine and a universal mounting base that can be mounted in new or existing installations with both medium and mogul base sockets. Preserve the historic look of the streetscape, maintain safety and eliminate compliance hurdles with the DPT Series.

### BENEFITS

- Improved illumination performance
- Significant energy and maintenance savings
- Eliminate compliance hurdles
- Reduce waste by using the existing luminaire
- Standard 10-year limited warranty

### FEATURES

- Minimum 70 CRI
- CCT: 3000K (+/- 300K); 4000K (+/- 300K)
- Made with Cree® LED Technology
- Utilizes a standalone UL 1598 compliant light engine
- Suitable for damp locations
- 6kV surge suppression protection tested in accordance with IEEE/ANSI C62.41.2

### APPLICATIONS

- Government, education, municipal, roadway

# DPT Series Post-Top Luminaire

## Ordering Information


Example: DPT-A-SB-FR-A-30K-UL-UF

| PRODUCT | VERSION | MOUNTING           | LENS                     | INPUT POWER DESIGNATOR | CCT                          | VOLTAGE                  | COLOR            |
|---------|---------|--------------------|--------------------------|------------------------|------------------------------|--------------------------|------------------|
| DPT     | A       | SB<br>Surface Base | FR<br>Frosted Glass Lens | A<br>34W               | 30K<br>3000K<br>40K<br>4000K | UL<br>Universal 120-277V | UF<br>Unfinished |

\*Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Dimensions

### LED DECORATIVE POST TOP LUMINAIRE

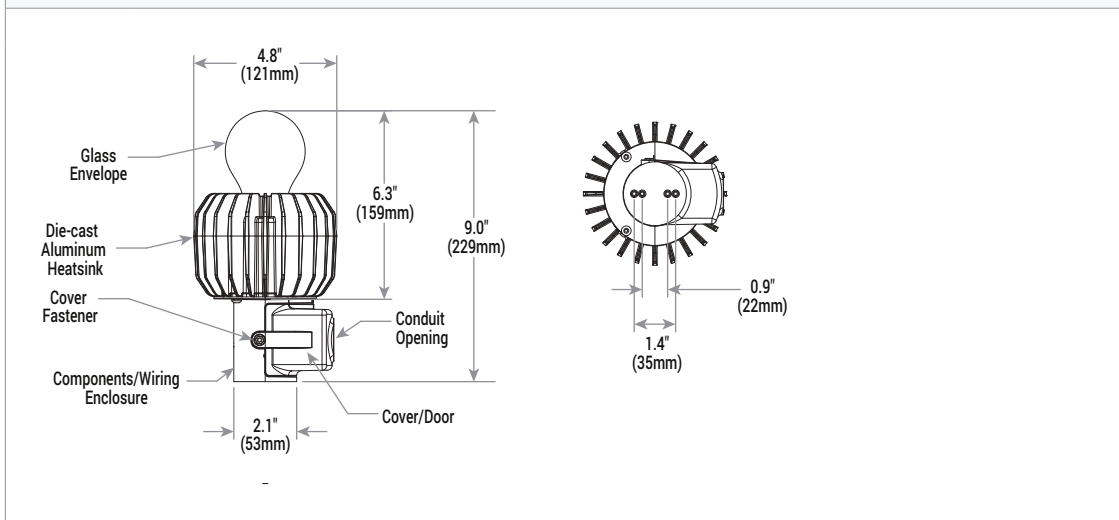

## Accessory Information

### EXTERNAL BACKLIGHT SHIELD OPTIONS

#### Backlight Control Shield

##### DPT-BLS

- No hardware required
- May not be used in combination with the uplight shield

#### Uplight Shield for Base-Down Applications

##### DPT-ULSBD

- Provides 65% cutoff
- Required for DLC qualification
- May not be used in combination with the backlight control shield

## You May Also Be Interested In:



**OSQ SERIES AREA**  
Low-Profile Area Lighting Solutions



**XSP SERIES WALL PACK**  
Affordable Site Lighting Solutions



**304 SERIES™ PARKING STRUCTURE**  
Low-Profile Parking Structure Lighting Solutions

## Traditional Post-Top Upgrade Kit



## YESTERDAY'S PRODUCTS, TODAY'S TECHNOLOGY.

The Cree® Traditional Post-Top Upgrade Kit allows owners to seamlessly transform their existing inefficient post-top luminaires with poor optical control into energy-efficient, low-maintenance LED luminaires. The result is improved optical control and target efficacy that combines a classic day-form style with a beautiful nightscape appearance. The easy-to-install upgrade kit uses most of the existing fixture, resulting in little waste while maintaining a consistent look — a seamless transition from yesterday to today.

### BENEFITS

- Improved illumination performance
- Significant energy and maintenance savings
- Eliminate the relamping cycle
- Reduce waste by using the existing luminaire
- Standard 10-year limited warranty

### FEATURES

- Minimum 70 CRI
- CCT: 2700K (+/-300K), 4000K (+/-300K)
- Patented NanoOptic® Technology
- UL wet listed
- 10K surge suppression protection tested in accordance with IEEE/ANSI C62.41.2

### APPLICATIONS

- Government & municipal, roadway

**BXRAAA**  
Kit for Holophane®  
Granville Acorn



**BXRAAB**  
Kit for Holophane®  
Washington PostLite® Acorn



**BXRAAD**  
Kit for King Luminaire  
Washington Acorn



**BXRAAE**  
Kit for Holophane®  
Esplanade® Teardrop



**BXRAAF**  
Kit for Lumec® New  
Westminster Globe



**BXRAAH**  
Kit for Holophane® Granville  
Utility Acorn w/ Hinged Door



**BXRAAK**  
Kit for Holophane® Granville  
Utility Acorn w/ Removable Door



# Traditional Post-Top Upgrade Kit

## Ordering Information


Example: BXRA-A-H-5-3-U-D-7-Y

| PRODUCT | VERSION | STYLE    | OPTIC                    | # OF SIDES | VOLTAGE  | INPUT POWER                            | COLOR TEMPERATURE                              | OPTIONS                      |
|---------|---------|----------|--------------------------|------------|--|--|--|------------------------------|
| BXRA    | A       | <b>A</b> | 5<br>Symmetric<br>Module | 3          | <b>U</b><br>Universal<br>120-277V<br><b>V</b><br>Universal<br>347-480V | <b>D</b><br>65W-68W<br><b>X</b><br>97W | <b>1</b><br>2700K CCT<br><b>7</b><br>4000K CCT | <b>Y</b><br>0-10V<br>Dimming |
|         |         | <b>B</b> |                          |            |  |  |  |                              |
|         |         | <b>D</b> |                          |            |  |  |  |                              |
|         |         | <b>E</b> |                          |            |  |  |  |                              |
|         |         | <b>F</b> |                          |            |  |  |  |                              |
|         |         | <b>H</b> |                          |            |  |  |  |                              |
|         |         | <b>K</b> |                          |            |  |  |  |                              |

\*Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Dimensions

### TRADITIONAL POST-TOP UPGRADE KITS

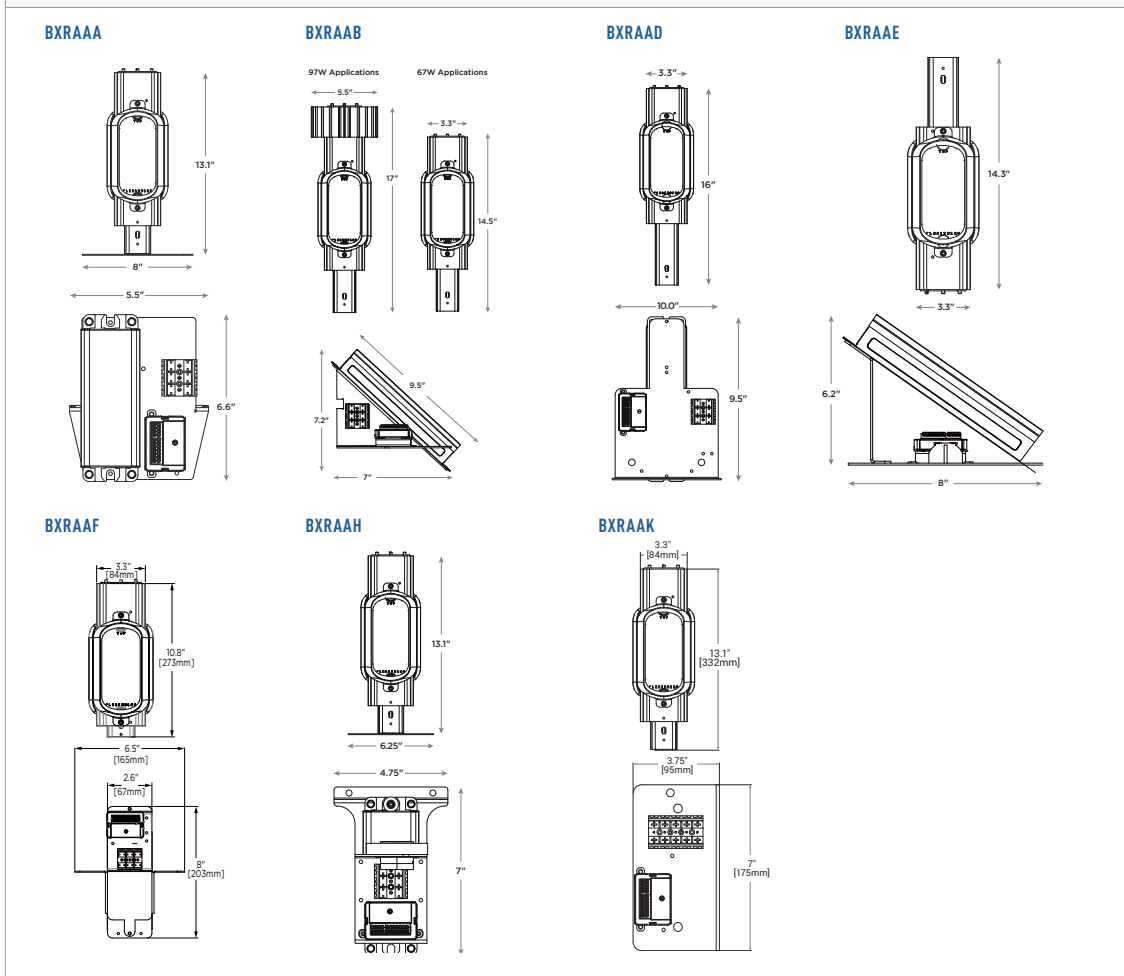

## You May Also Be Interested In:



**CREE EDGE™ SERIES WALL MOUNT**  
Wall Mount Lighting Solutions



**CREE EDGE™ SERIES AREA**  
Steak, Modular Area Lighting Solutions



**CREE EDGE™ SERIES FLOOD**  
Flood Lighting Solutions

## LED CANOPY & SOFFIT

Commercial and retail canopy lighting plays a vital role in the appearance and perception of a business. Traditional lighting products can leave businesses looking unsafe and uninviting due to reduced light levels and random lamp outages over time. Cree® LED products can offer a better approach resulting in significant energy and maintenance savings while improving illumination performance and appearance of a business during nighttime hours.



**CPY Series**

p.118



- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- Direct and pendant mounts
- Flat or drop lenses available
- Upgrade kit options
- Slim, low-profile design

**228 Series™**

p.120



- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- UL wet listed
- Multi-Level options
- Upgrade kit options
- Modular, low-profile design

**304 Series™**

p.122



- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- UL wet listed
- Driver centrally located
- Convenient electrical inspection access from below
- Modular, low-profile design

**Cree Edge™ Series**

p.124



- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- UL wet listed
- Two-Level options
- Modular, low-profile design

## CPY Series Canopy & Soffit



## "BEST IN CLASS" PERFORMANCE STANDARD.

The CPY250™ fixture delivers up to 20,784 lumens under the canopy while consuming less power than traditional sources. Available in both flat and 1" prismatic drop lens, the CPY250™ fixture provides two illumination aesthetics to meet both the visual, as well as the vertical and horizontal illumination performance needs of a typical canopy/soffit application.

### BENEFITS

- Superior illumination performance
- Quick and easy installation
- Low total cost of ownership
- Standard 10-year limited warranty

### FEATURES

- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- UL listed
- Flat or drop lens option
- 0-10V dimming option (120W, 140W & 145W)
- Direct surface mount or pendant mount
- Slim, low-profile design
- Exclusive Colorfast DeltaGuard® Finish
- Class I, Division II Hazardous Location for select models

### APPLICATIONS

- Airport, auto dealership, corporate & office, education, government & municipal, healthcare, petroleum & convenience store, restaurant & hospitality, retail & grocery

CPY Series - Flat Lens



CPY Series - Drop Lens





## CPY Series Canopy &amp; Soffit

## Ordering Information

Example: CPY250-A-DM-D-A-UL-WH-DIM

| PRODUCT | VERSION | MOUNTING                                    | OPTIC  | INPUT POWER DESIGNATOR   | VOLTAGE  | COLOR OPTIONS   | FACTORY INSTALLED OPTIONS   |
|---------|---------|---|--|--|--|---|---|
| CPY250  | A       | <b>DM</b><br>Direct<br><b>PD</b><br>Pendant | <b>D</b><br>0.91" (23mm)<br>Drop Lens<br><b>F</b><br>Flat Lens | <b>A</b><br>82W<br><b>B</b><br>120W<br><b>C</b><br>43W<br><b>D</b><br>140W<br><b>E</b><br>145W | <b>UL</b><br>Universal<br>120-277V<br><b>UH</b><br>Universal<br>347-480V | <b>BK</b><br>Black<br><b>BZ</b><br>Bronze<br><b>SV</b><br>Silver<br><b>WH</b><br>Whit | <b>DIM</b><br>0-10V Dimming<br><b>ML</b><br>Multi-Level<br><b>PML</b><br>Programmable<br>Multi-Level<br><b>40K</b><br>4000K |

\* Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Accessory Information

## DIRECT MOUNT - CANOPY UPGRADE KITS

Used when replacing HID luminaires in existing open canopies.

- XA-BXCCMW** - for use with Jet-Phillips canopy luminaires
- XA-BXCCNW** - for use with ElSCO Franciscan canopy luminaires
- XA-BXCCPW** - for use with LSI Dakota or Masters canopy luminaires
- XA-BXCCQW** - for use with Whiteway Riviera or Rig-A-Lite canopy luminaires
- XA-BXCCRW** - for use with ElSCO Merrit canopy luminaires
- XA-BXCCSW** - for use with LSI Richmond or Whiteway Civic canopy luminaires



## DIRECT MOUNT - JUNCTION BOX / STEM KIT

**XA-BXCCJBOX** - 6.0" (152mm) H x 3/4" (19mm) NPT Stem



## DIRECT MOUNT - BEAUTY PLATE

Metal plate used when replacing surface-mounted HID luminaires.  
Painted Colorfast DeltaGuard® white.

- XA-BXCCBPW** - Square 26"
- XA-BXCCBPB12W** - Beauty Plate w/ 12" (305mm) Backer
- XA-BXCCBPB16W** - Beauty Plate w/ 16" (406mm) Backer



## PENDANT MOUNT KITS

Pendant height from ceiling surface to bottom of fixture; mounting accessories or surface boxes will add to overall height


- XA-PS22KIT\*** - 22" (559mm)
- XA-PS12KIT\*** - 12" (305mm)
- XA-PS18KIT\*** - 18" (457mm)

## HAND-HELD REMOTE


**XA-SENSREM** - For successful implementation of the programmable multi-level option, a minimum of one hand-held remote is required

## Dimensions

## DIRECT MOUNT

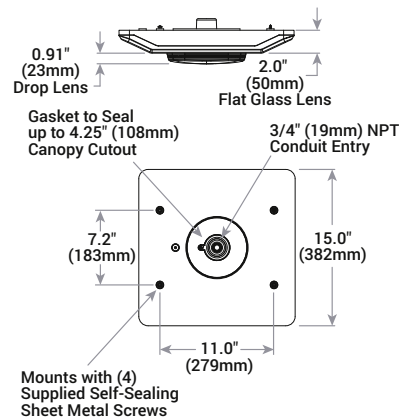

## PENDANT MOUNT

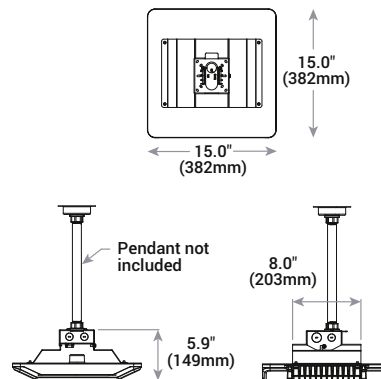

## You May Also Be Interested In:



**OSQ SERIES AREA**  
Low-Profile Area Lighting Solutions



**XSP SERIES WALL PACK**  
Affordable Site Lighting Solutions



**LEDWAY® SERIES**  
**STREET LIGHTS**  
Versatile Street Light Solutions

## 228 Series™ Recessed Canopy and Soffit



## INNOVATIVE MODULAR DESIGN AND EASY INSTALLATION.

228 Series™ luminaires dramatically improve site appearance while substantially reducing energy and maintenance costs. The 228 Series™ luminaires are designed for multi-purpose use in exterior canopies such as petroleum stations, drive-thru banks and restaurants, and indoor retail or industrial spaces. The flexible 30- to 90-LED configurations allow for increased visibility and safety below canopies and around building perimeters. The 90-LED luminaires are ideal for areas requiring high illuminance levels.

### BENEFITS

- Improved illumination performance
- Significant energy and maintenance savings
- Eliminate the relamping cycle
- Standard 10-year limited warranty
- Designed for easy installation
- Suitable for use in single or double skin canopies with 12" or 16" panels
- Serviceable from below the canopy deck

### FEATURES

- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- UL wet listed
- Field adjustable drive current
- Modular, low-profile design

### APPLICATIONS

- Airport, auto dealership, corporate & office, education, government & municipal, healthcare, petroleum & convenience store, restaurant & hospitality, retail & grocery

228 Series™ Recessed Canopy



228 Series™ Recessed Soffit



## 228 Series™ Recessed Canopy and Soffit

## Ordering Information

Example: CAN-228-PS-RM-06-E-UL-WH-700-ML

| FAMILY  | PRODUCT | OPTIC                  | MOUNTING   | # OF LEADS (X10)   | LED SERIES | VOLTAGE | COLOR OPTIONS               | DRIVE CURRENT | FACTORY INSTALLED OPTIONS |                             |             |              |                |              |                   |
|---------|---------|------------------------|--|--|------------|---------|-----------------------------|---------------|---------------------------|-----------------------------|-------------|--------------|----------------|--------------|-------------------|
| CAN SFT | 228     | 5M<br>Type V<br>Medium | RM<br>Recessed   | RT4<br>Upgrade for                                       | 03         | E       | UL<br>Universal<br>120-277V | 350<br>350mA  | 40K<br>4000K CCT          |                             |             |              |                |              |                   |
|         |         |                        | RR<br>Recessed Remodel                                     | RT5<br>Elsco Merritt Series                              | 06         |         |                             |               |                           |                             |             |              |                |              |                   |
|         |         |                        | PS<br>Petroleum  | RT1<br>Upgrade for Elsco Franciscan Series               | 09         |         |                             |               |                           |                             |             |              |                |              |                   |
|         |         | SL<br>Symmetric        | RT2<br>Upgrade for Elsco Dakota or Masters Series          | RT6<br>Upgrade for LSI Richmond or Whiteway Civic Series |            |         |                             |               |                           | UH<br>Universal<br>347-480V | WH<br>White | 700<br>700mA | IC<br>IC Rated |              |                   |
|         |         |                        | RT3<br>Upgrade for Whiteway Riviera 2 or Rig-A-Lite Series |  | 12<br>120V |         |                             |               |                           |                             |             |              |                | 900<br>900mA | ML<br>Multi-Level |
|         |         |                        |  |  |            |         |                             |               |                           |                             |             |              |                |              |                   |
|         |         | Sparkle<br>Petroleum   |  |  |            |         |                             |               |                           |                             |             |              |                |              |                   |

\* Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Accessory Information

## UPGRADE PLATE KIT (CAN-228 MODELS ONLY)

Used when replacing recessed HID luminaires in existing open canopies.

For use with canopies that are greater than 2-1/2" in height:

XA-CT30F021W - for use with 30-LED canopy lights

XA-CT60F021W - for use with 60-LED canopy lights

XA-CT90F021W - for use with 90-LED canopy lights

For use with shallow canopies that are less than 2-1/2" in height:

XA-CT30F021WS - for use with 30-LED canopy lights

XA-CT60F021WS - for use with 60-LED canopy lights

XA-CT90F021WS - for use with 90-LED canopy lights

## UPGRADE PLATE KIT - PLASTIC (CAN-228 MODELS ONLY)

Kits without backer plates—for use with canopies that have maximum of 7" diameter cut hole:

XA-CT30B047W - for use with 30-LED canopy lights

XA-CT60B047W - for use with 60-LED canopy lights

XA-CT90B047W - for use with 90-LED canopy lights

Kits without backer plates—for use with 12" or 16" canopies that have maximum of 10" x 10" diameter cut hole:

XA-CT30C241W - for use with 30-LED canopy lights

XA-CT60C241W - for use with 60-LED canopy lights

XA-CT90C241W - for use with 90-LED canopy lights

Kits without backer plates—for use with 16" canopies that have maximum of 12" diameter or 12" x 12" cut hole:

XA-CT30C642W - for use with 30-LED canopy lights

XA-CT60C642W - for use with 60-LED canopy lights

XA-CT90C642W - for use with 90-LED canopy lights

## UPGRADE PLATE KIT - METAL (CAN-228 MODELS ONLY)

Metal plate used when replacing surface-mounted HID luminaires. Painted DeltaGuard® white. Must be field cut to match luminaire opening.

XA-CTP26X24WT - Spans two 12" deck panels

XA-CTP26X32WT - Spans two 16" deck panels

## Accessory Information

## HAND-HELD REMOTE

## XA-SENSREM

-For successful implementation of programmable multi-level option, a minimum of one hand-held remote is required

## MOUNTING C CHANNELS (SFT-228 MODELS ONLY)

XA-MC14 Mounting C Channel - 14" (356mm) Long

XA-MC22 Mounting C Channel - 22" (559mm) Long


XA-MC30 Mounting C Channel - 30" (762mm) Long

## MOUNTING BRACKETS (SFT-228 MODELS ONLY)


XA-MB4 - Kit contains 4

## Dimensions

## 228 SERIES™ RECESSED CANOPY



## 228 SERIES™ RECESSED SOFFIT

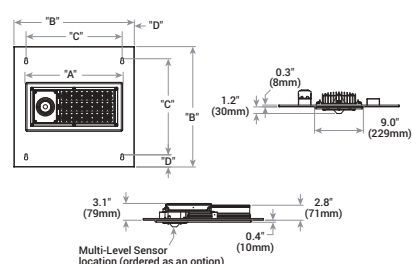

## You May Also Be Interested In:



CREE EDGE™ SERIES AREA  
Steek, Modular Area Lighting Solutions



XSP SERIES WALL PACK  
Affordable Site Lighting Solutions



LEDWAY® SERIES  
STREET LIGHTS  
Versatile Street Light Solutions

## 304 Series™ Recessed Canopy and Soffit



304 Series™ Recessed Canopy



304 Series™ Recessed Soffit



## AN INVESTMENT IN SAVINGS THAT LOOKS GREAT FOR YEARS.

The 304 Series™ canopy luminaire can dramatically improve illumination performance while saving significant energy consumption. In addition, since it is designed to operate nearly maintenance-free for more than a decade, routine service calls and disruptions required of traditional technologies can be a thing of the past. Available in 40- or 60-LED configurations, multiple optical distributions, drive currents and mounting options, the CAN-304 is an affordable solution that's not short on performance.

### BENEFITS

- Improved illumination performance
- Significant energy and maintenance savings
- Eliminate the relamping cycle
- Standard 10-year limited warranty

### FEATURES

- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- UL wet listed
- International Dark Sky Association approved
- Centrally-located driver provides ease of installation and through-wiring (daisy chaining luminaires)
- Convenient electrical inspection access from below the luminaire

### APPLICATIONS

- Airport, auto dealership, corporate & office, education, government & municipal, healthcare, industrial & warehouse, petroleum & convenience store, restaurant & hospitality, retail & grocery

# 304 Series™ Recessed Canopy and Soffit

Example: CAN-304-5M-RD-04-E-UL-WH-700-ML

| PRODUCT            | OPTIC                        | MOUNTING   | # OF LEDS (X10) | LED SERIES | VOLTAGE                     | COLOR OPTIONS | DRIVE CURRENT  | FACTORY INSTALLED OPTIONS       |
|--------------------|------------------------------|--|-----------------|------------|-----------------------------|---------------|----------------|---------------------------------|
| CAN 304<br>SFT 304 | 5M<br>Type V<br>Medium       | RM<br>Recessed   | 04              | E          | UL<br>Universal<br>120-277V | WH<br>White   | 350<br>350mA   | 40K<br>4000K CCT                |
|                    | 5S<br>Type V Short           | RS<br>Recessed Single Skin                                 | 06              |            | UH<br>Universal<br>347-480V | SV<br>Silver  | 525<br>525mA   | DIM<br>0-10V Dimming            |
|                    | PS<br>Petroleum<br>Symmetric | RD<br>Recessed Double Skin                                 |                 |            | 12<br>120V                  | BZ<br>Bronze  | 700<br>700mA   | F<br>Fuse                       |
|                    | SL<br>Sparkle<br>Petroleum   | RT1<br>Upgrade for ElSCO Franciscan Series                 |                 |            | 27<br>277V                  | BK<br>Black   |                | ML<br>Multi-Level               |
|                    |                              | RT2<br>Upgrade for LSI Dakota or Masters Series            |                 |            |                             |               |                | PML<br>Programmable Multi-Level |
|                    |                              | RT3<br>Upgrade for Whiteway Riviera 2 or Rig-A-Lite Series |                 |            |                             |               | IC<br>IC Rated |                                 |
|                    |                              | RT4<br>Upgrade for ElSCO Merritt Series                    |                 |            |                             |               |                |                                 |
|                    |                              | RT5<br>Upgrade for Jet-Philips Series                      |                 |            |                             |               |                |                                 |

\* Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Accessory Information

### HANGER BAR - MOUNTING BRACKETS

**XA-MB4**  
- Kit contains 4

### HANGER BAR - MOUNTING C-CHANNEL

**XA-MC14**  
- Pair of 14" (356mm) rigid 3/4" x 1/2" (19mm x 13mm) galvanized C-Channel bars

**XA-MC22**  
- Pair of 22" (559mm) rigid 3/4" x 1/2" (19mm x 13mm) galvanized C-Channel bars

**XA-MC30**  
- Pair of 30" (762mm) rigid 3/4" x 1/2" (19mm x 13mm) galvanized C-Channel bars

### HAND-HELD REMOTE

**XA-SENSREM**  
- For successful implementation of programmable multi-level option, a minimum of one hand-held remote is required

## You May Also Be Interested In:



**304 SERIES™ FLOOD**  
Low-Profile Flood Lighting Solutions




**304 SERIES™ PARKING STRUCTURE**  
Low-Profile Parking Structure Lighting Solutions



**304 SERIES™ INTERIOR**  
High-Performance Interior Lighting Solutions


## Dimensions

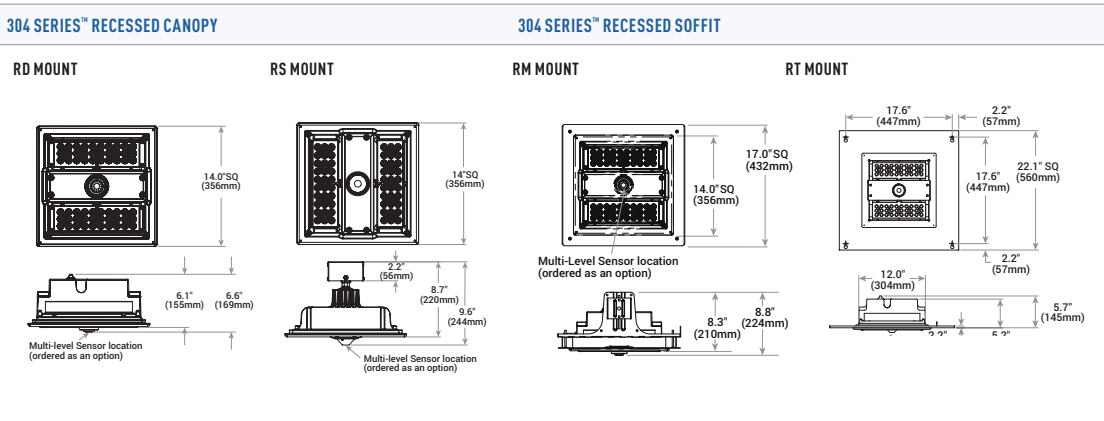

## Cree Edge™ Series Surface Mount Canopy



Cree Edge™ Surface Mount Canopy



## THE PRODUCT THAT HELPED START A REVOLUTION.

Successfully launched in 2007, Cree Edge™ canopy products helped set the standard for performance and value. Available in a variety of LED counts, multiple drive currents and optical distributions, Cree Edge™ canopy luminaires offer a scalable solution that provides exacting illumination performance. Cree Edge™ canopy luminaires have continued to advance over the years and offer more value today than ever before.

### BENEFITS

- Improved illumination performance
- Significant energy and maintenance savings
- Eliminate the relamping cycle
- Standard 10-year limited warranty

### FEATURES

- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- UL wet listed
- Compliance IES BUG ratings available
- Photometric testing to IESNA-79-08 standards
- Two-Level options
- Modular, low-profile design

### APPLICATIONS

- Airport, auto dealership, corporate & office, education, government & municipal, healthcare, industrial & warehouse, petroleum & convenience store, restaurant & hospitality, retail & grocery

## Cree Edge™ Series Surface Mount Canopy


## Ordering Information

Example: CAN-EDG-3M-DM-06-E-UL-SV-525-ML

| FAMILY | PRODUCT | OPTIC |                 | MOUNTING | # OF LEDS (X10) | LED SERIES | VOLTAGE      | COLOR OPTIONS | DRIVE CURRENT | FACTORY INSTALLED OPTIONS         |
|--------|---------|-------|-----------------|----------|-----------------|------------|--------------|---------------|---------------|-----------------------------------|
| CAN    | EDG     | 1S    | 15° Flood       | DM       | 04              | E          | UL           | WH            | 350           | 40K                               |
|        |         |       | Type I Short    |          | 06              |            |              |               | 40K CCT       |                                   |
|        |         | 3M    | 25° Flood       | PD       | 08              |            | Universal    | SV            | 525           | DIM                               |
|        |         |       | Type III Medium |          | 10              |            | 120-277V     |               | 0-10V Dimming |                                   |
|        |         | 5M    | 40° Flood       | UP       | 12              |            | Universal    | BZ            | 700           | F                                 |
|        |         |       | Type V Medium   |          | 14              |            | 347-480V     |               | Fuse          |                                   |
|        |         | 5S    | 70° Flood       |          | 16              |            | 34           | BK            | 700mA         | HL                                |
|        |         |       | Type V Short    |          | 20              |            | 340V         |               |               |                                   |
|        |         | PS    | 70° Flood       |          | 24              |            |              |               |               | (175/350/525, Dual Circuit Input) |
|        |         |       | Petroleum       |          |                 |            |              |               |               | ML                                |
|        |         |       | Symmetric       |          |                 |            |              |               |               | Multi-Level                       |
|        |         |       | SL              |          |                 |            |              |               |               | P                                 |
|        |         |       | Sparkle         |          |                 |            |              |               |               | Photocell                         |
|        |         |       | Petroleum       |          |                 |            |              |               |               | PML                               |
|        |         |       |                 |          |                 |            | Programmable |               |               |                                   |
|        |         |       |                 |          |                 |            | Multi-Level  |               |               |                                   |

\* Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.


## Accessory Information

| BIRD SPIKE OPTION (DM AND PD MOUNTS ONLY)   | ADAPTOR PLATE KIT (DM MODELS ONLY)                          | LEVELER (PD MODELS ONLY)               | PENDANT KIT OPTIONS (PD MODELS ONLY)  | PENDANT FITTING (PD MODELS ONLY)             | HAND-HELD REMOTE   |
|---|---|--|---|--|--|
| <br>XA-BRDSPK | XA-CLSB16 - For use when mounting fixture to solid surfaces | XA-PNDTLVL - For 0-13° sloped ceilings | XA-CL12KIT - 12" (305mm)*<br>XA-CL18KIT - 18" (457mm)*<br>XA-CL22KIT - 22" (559mm)*<br>* Pendant height to bottom of fixture; mounting accessories or surface boxes will add to overall height. | XA-PSFTG<br>XA-CLHOOK<br>- 3/4" hook adaptor | XA-SENSREM<br>-For successful implementation of the programmable multi-level option, a minimum of one hand-held remote is required |

## Dimensions

## CREE EDGE™ SURFACE MOUNT CANOPY

## DM MOUNT

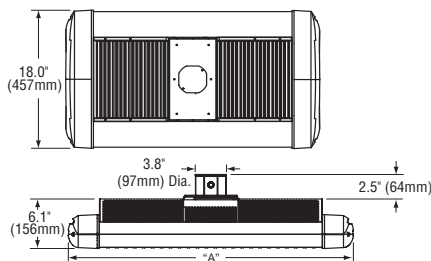

| LED Count (x10) | DIM. "A"      |
|-----------------|---------------|
| 04              | 16.1" (408mm) |
| 06              | 18.1" (459mm) |
| 08              | 16.1" (408mm) |
| 10              | 18.1" (459mm) |
| 12              | 20.1" (510mm) |
| 14              | 22.1" (560mm) |
| 16              | 24.1" (611mm) |
| 20              | 28.1" (713mm) |
| 24              | 32.1" (814mm) |

## You May Also Be Interested In:



## VG SERIES PARKING STRUCTURE

Scalable, Versatile Parking Structure Solutions



## CREE EDGE™ SERIES WALL MOUNT

Wall Mount Lighting Solutions



## CREE EDGE™ SERIES FLOOD

Flood Lighting Solutions

## LED PARKING STRUCTURE

There are few better opportunities for LED lighting than parking structures. Typical parking structures operate 24 hours a day, seven days a week. That's a lot of wasted energy and maintenance costs when using traditional light sources. Cree® LED solutions in this space can provide significant energy and maintenance savings, as well as improved illumination performance and reliability.





**IG Series**

p.128

- Minimum 80 CRI
- CCT: 4000K (+/- 300K), 5700K (+/- 500K)
- Utilizes WaveMax™ Technology
- Acrylic Lenses with DiamondFacet™ optical elements
- Technology driven design
- 6% Uplight
- UL wet listed
- IP66 rated

**304 Series**

p.130

- Minimum 70 CRI
- CCT: 4000K, 5700K
- UL wet listed
- IP66 rated
- Multi-Level options, integrated occupancy sensor
- Modular, low-profile design

**VG Series**

p.132

- Minimum 70 CRI
  - CCT: 4000K, 5700K
  - UL wet listed
  - IP66 rated
  - Multi-Level options, integrated occupancy sensor
  - Compact low-profile design
-

## IG Series Parking Structure



IG Series



## LOW-GLARE ILLUMINATION WITH HIGH-ENERGY EFFICIENCY

Lighting the parking garage presents particular challenges, and the IG Series with WaveMax™ Technology is built for the job. WaveMax™ Technology provides unmatched low-glare comfort and decreased LED source luminance to cast rich illumination that maximizes detail and defeats shadows. The IG Series delivers unprecedented low-glare illumination, exceptional energy efficiency and fast payback, redefining how you think about parking garage lighting.

### BENEFITS

- Low-glare illumination
- Low energy consumption
- Easy installation
- Standard 10-year limited warranty on luminaire

### FEATURES

- Minimum 80 CRI
- CCT: 4000K (+/- 300K), 5700K (+/- 500K)
- Initial Delivered Lumens: 3,910 or 7,500 lumens
- Efficacy: Up to 118 LPW
- Utilizes WaveMax™ Technology
- Acrylic Lenses with DiamondFacet™ optical elements
- Low profile, lightweight design
- 6% Uplight
- IP66 rated

### APPLICATIONS

- Airport, education, government, healthcare and retail

## IG Series Parking Structure

### Ordering Information

Example: **Mount:** IG-JBWH + **Luminaire:** IG-A-NM-5S-A-40K-UL-WH

Fully assembled luminaire is composed of two components that must be ordered separately

#### MOUNT (Luminaire must be ordered separately)

|                                     |             |
|-------------------------------------|-------------|
| IG-JB Junction Box<br>IG-PD Pendant | WH<br>White |
|-------------------------------------|-------------|

#### LUMINAIRE (LUMINAIRE MUST BE ORDERED SEPARATELY)

| PRODUCT | MOUNTING       | OPTIC              | INPUT POWER DESIGNATOR  | CCT                          | VOLTAGE                      | COLOR       | OPTIONS  |
|---------|----------------|--------------------|---|------------------------------|------------------------------|-------------|--|
| IG      | NM<br>No Mount | 5S<br>Type V Short | A<br>33W, 3,910 lumens - 118 LPW<br>J<br>66W, 7,500 lumens -114 LPW | 40K<br>4000K<br>57K<br>5700K | UL<br>120-277V<br>34<br>347V | WH<br>White | PML<br>Programmable Multi-Level<br>- Refer to PML spec sheet for details |

\* Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

### Accessory Information

#### FIELD-INSTALLED

##### Hand-Held Remote


XA-SENSREM

- For successful implementation of the programmable multi-level option, a minimum of one hand-held remote is required

### Dimensions


#### IG SERIES PARKING STRUCTURE

##### BOX MOUNT

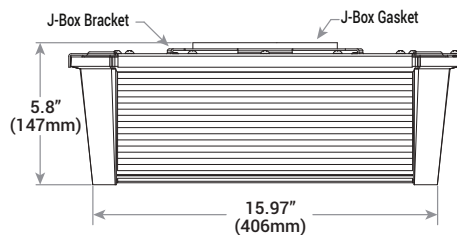

Weight: 10 lbs. (4.5kg)

##### PENDANT MOUNT

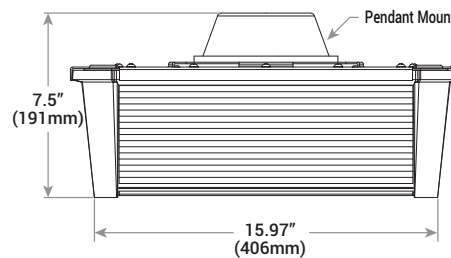

Weight: 10 lbs. (4.5kg)

### You May Also Be Interested In:



#### OSQ SERIES AREA

Sleek, Modular Area Lighting Solutions



#### CPY SERIES CANOPY

Outdoor Canopy Solutions




#### CREE EDGE™ SERIES FLOOD

Flood Lighting Solutions

## 304 Series™ Parking Structure



304 Series™ Parking Structure



## AN OPERATING BUDGET'S NEW BEST FRIEND.

Although LED solutions are well-suited for many applications today, few have the potential to match the opportunity parking structures offer in terms of energy and maintenance savings. Our 304 Series™ luminaire is uniquely qualified to meet the needs in this space, providing improved illumination performance while significantly reducing energy and maintenance costs. Available in 40- or 60-LED configurations, three power conditions and multiple optical distributions, the 304 Series Parking Structure luminaire is an affordable solution that's not short on performance. Add our optional integrated occupancy sensor and make a great energy savings story even better.

### BENEFITS

- Improved illumination performance
- Significant energy and maintenance savings
- Eliminate the relamping cycle
- Standard 10-year limited warranty

### FEATURES

- Minimum 70 CRI
- CCT: 4000K (+/- 300K), 5700K (+/- 500K)
- Exclusive Colorfast DeltaGuard® Finish
- UL wet listed
- Multi-Level options
- Integrated occupancy sensor
- Low-profile design

### APPLICATIONS

- Airport, corporate & office, education, healthcare and retail

## 304 Series™ Parking Structure

## Ordering Information

Example: PKG-304-5M-HC-04-E-UL-SV-525-ML

| PRODUCT | OPTIC                        | MOUNTING            | # OF LEDS (X10) | LED SERIES | VOLTAGE                     | COLOR OPTIONS | DRIVE CURRENT              | OPTIONS                         |
|---------|------------------------------|---------------------|-----------------|------------|-----------------------------|---------------|----------------------------|---------------------------------|
| PKG-304 | 5M<br>Type V Medium          | DM<br>Direct Mount  | 04              | E          | UL<br>Universal<br>120-277V | SV<br>Silver  | 350<br>350mA               | 40K<br>4000K CCT                |
|         | 5S<br>Type V Short           | HC<br>Hook and Cord | 06              |            | UH<br>Universal<br>347-480V | BZ<br>Bronze  | 525<br>525mA               | DIM<br>0-10V Dimming            |
|         | PS<br>Petroleum<br>Symmetric | PD<br>Pendant Mount |                 |            |                             | BK<br>Black   | 700<br>700mA<br>(Standard) | F<br>Fuse                       |
|         | SL<br>Sparkle<br>Petroleum   |                     |                 |            |                             | WH<br>White   |                            | J<br>Alternate Junction Box     |
|         | 40<br>40-degree              |                     |                 |            |                             |               |                            | ML<br>Multi-Level (75/525)      |
|         |                              |                     |                 |            |                             |               |                            | PML<br>Programmable Multi-Level |

\* Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.


## Accessory Information

| FIELD-INSTALLED  |  |   |
|--|--|---|
| <b>Pendant Mount Kits</b><br>Pendant height from ceiling surface to bottom of the luminaire; mounting accessories or surface boxes will add to overall height<br><b>XA-PS12KIT</b> – 12" (305mm)<br><b>XA-PS18KIT</b> – 18" (457mm)<br><b>XA-PS22KIT</b> – 22" (559mm)<br><b>Pendant Mount Fitting</b><br><b>XA-PSFTG**</b> – Pendant Fitting<br><b>Pendant Mount Leveler</b><br><b>XA-PNDTLVL</b> – Leveler for 0-13° Sloped Ceilings<br><b>Bird Guard</b><br><b>XA-XCPBRDGRD</b> – For Pendant or Hook & Cord Mount Only<br><br>**Must specify color | <b>Hook &amp; Cord Mount Locking Type Plug</b><br><b>XA-L515P</b> – 120V<br><b>XA-L615P</b> – 208/240V<br><b>XA-L715P</b> – 277V<br><b>XA-L3720P</b> – 347V<br><br><b>Hook &amp; Cord Mount Locking Type Receptacle</b><br><b>XA-L515R</b> – 120V<br><b>XA-L615R</b> – 208/240V<br><b>XA-L715R</b> – 277V<br><b>XA-L720R</b> – 347V<br><br><b>Hook &amp; Cord Mount Steady Lock</b><br><b>SL-C</b> – Steady Lock for Eyebolt | <b>Hand-Held Remote</b><br><b>XA-SENSREM</b><br>For successful implementation of the programmable multi-level option, a minimum of one hand-held remote is required |

## Dimensions

## 304 SERIES™ PARKING STRUCTURE

## DM MOUNT

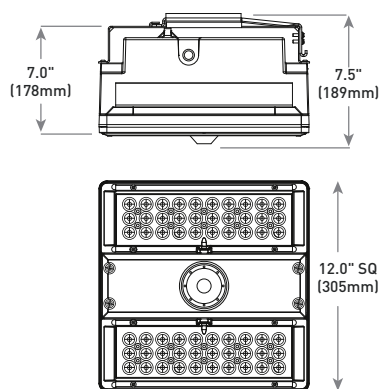

## You May Also Be Interested In:



**CREE EDGE™ SERIES CANOPY**  
Low-Profile, Easy-Mount Canopy Lighting Solutions



**CPY SERIES CANOPY**  
Outdoor Canopy Solutions



**CREE EDGE™ SERIES FLOOD**  
Flood Lighting Solutions

## VG Series Vehicle Garage



VG Series



## REIMAGINE PARKING STRUCTURES WITH UNIFORM LED LIGHTING.

The VG Series parking structure luminaire delivers optimal, low-glare illumination by intelligently eliminating direct view of the LEDs with a revolutionary optical system. The state-of-the-art optical system combines the use of indirect view LEDs, an internal reflector and a precision designed lens to distribute illumination at key angles with low glare, exceptional uniformity and desirable uplight. Whether it's an existing parking structure or new construction, the VG Series with its high-performance optical system, architectural aesthetic design and low initial cost delivers where it matters.

### BENEFITS

- Indirect view optical system
- Low glare and exceptional uniform lighting
- Easy and quick installation
- Standard 10-year limited warranty

### FEATURES

- Minimum 70 CRI
- CCT: 4000K (+/- 300K), 5700K (+/- 500K)
- UL wet listed, IP66 rated
- Multi-Level options, integrated occupancy sensor
- Modular, low-profile design

### APPLICATIONS

- Airport, corporate & office, education, healthcare, and retail

# VG Series Vehicle Garage

## Ordering Information

Example: VG-A-DM-5M-A-40K-UL-SV

| PRODUCT | VERSION | MOUNTING   | OPTIC                                    | INPUT POWER DESIGNATOR | CCT                          | VOLTAGE                     | COLOR OPTIONS  | OPTIONS  |
|---------|---------|--|--|------------------------|------------------------------|-----------------------------|--|--|
| VG      | A       | DM<br>Surface Direct<br>JB<br>J-Box<br>PD<br>Pendant | 5M<br>Type V Medium<br>5W<br>Type V Wide | A<br>50W               | 40K<br>4000K<br>57K<br>5700K | UL<br>Universal<br>120-277V | BK<br>Black<br>BZ<br>Bronze<br>SV<br>Silver<br>WH<br>White | ML<br>Multi-Level<br>PML<br>Programmable Multi-Level |

\* Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Accessory Information

### PERIMETER SHROUD

VG-PSSV



### BIRD SHROUD

VG-BS

Must specify finish color. Not available with JB Mount



### HAND-HELD REMOTE


XA-SENSREM

For successful implementation of the programmable multi-level option, a minimum of one hand-held remote is required


## Dimensions

### VG SERIES PARKING STRUCTURE


#### DM MOUNT



#### JB MOUNT



#### PD MOUNT



## You May Also Be Interested In:



**OSO SERIES AREA**  
Steek, Modular Area Lighting Solutions



**CPY SERIES CANOPY**  
Outdoor Canopy Solutions



**CREE EDGE™ SERIES FLOOD**  
Flood Lighting Solutions

## LED FLOOD

The term flood lighting seems to imply limited optical control. Not from a Cree® lighting solution. Cree LED Flood products provide exacting control to meet a wide range of applications. From general illumination for parking lots to tight beams of light that precisely accent architecture and flags, Cree has the optical choices and control needed to effectively illuminate most any application.







### OSQ Series

p.136

- Minimum 70 CRI (4000K, 5700K), 80 CRI (3000K)
- CCT: 3000K (+/- 300K), 4000K (+/- 300K), 5700K (+/- 500K)
- Utilizes NanoOptic® Technology
- Lumen Range: 7,644 - 25,000
- cULus Listed



### Cree Edge™ Series

p.138

- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- UL wet listed
- Modular, low-profile design



### 304 Series™

p.140

- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- UL wet listed
- Low-profile design



### OL Series™

p.142

- Minimum 70 CRI
- CCT: 3500K (+/-100K), 4000K (+/-100K), 5700K (+/-500K)
- UL wet listed
- Step and continuous dimming options
- 360° adjustability in 5° increments
- Available in 2-, 4- and 8-foot lengths

## OSQ Series Flood



## FAÇADES THAT INVITE AND IMPRESS.

Improve the overall look of your facades and signage with the OSQ™ LED luminaire. The slim, low profile design adds architectural appeal to any general flood lighting application with crisp uniform white light. With remarkable color quality and smooth white light, buildings and signage will stand out in the crowd.

### BENEFITS

- Suitable upgrade for HID applications up to 750 Watts
- Simple installation and angle adjustment
- Slim, low-profile design
- Improved energy and maintenance savings
- Standard 10-year limited warranty

### FEATURES

- Minimum 70 CRI (4000K & 5700K); 80 CRI (3000K)
- CCT: 4000K (+/- 300K), 5700K (+/- 500K)
- Exclusive Colorfast DeltaGuard® Finish
- Utilizes NanoOptic® Technology
- cULus Listed

### APPLICATIONS

- Airport, Auto Dealership, Corporate & Office, Education, Government, Healthcare, Industrial & Warehouse, Municipal, Pedestrian, Petroleum & Convenience Stores, Recreation & Public Venues, Restaurants & Hospitality, Retail & Grocery, Roadway

OSQ™ Flood



OSQ™ Flood Utility



# OSQ Series Flood


## Ordering Information

Example: **Mount:** OSQ-AA-SV + **Luminaire:** OSQ-A-NM-WSN-A-40K-UL-SV

| MOUNT                    |         | COLOR OPTIONS      |  |   |   |  |  |  |  |
|--------------------------|---------|--------------------|--|---|---|--|--|--|--|
| OSQ-AA<br>Adjustable Arm |         | <b>BK</b><br>Black |  | <b>SV</b><br>Silver   |   | <b>BZ</b><br>Bronze  |  | <b>WH</b><br>White   |  |
| PRODUCT                  | VERSION | MOUNTING           | OPTIC  | INPUT POWER DESIGNATOR  | CCT   | VOLTAGE  | COLOR OPTIONS  | OPTIONS  |  |
| OSQ                      | A       | NM<br>No Mount     | <b>ASYMMETRIC:</b><br><b>2ME</b><br>Type II Medium<br><b>3ME</b><br>Type III Medium<br><b>4ME</b><br>Type IV Medium<br><br><b>SYMMETRIC:</b><br><b>5ME</b><br>Type V Medium<br><b>5SH</b><br>Type V Short<br><b>WSN</b><br>Wide Sign<br><b>15D</b><br>15" Flood<br><b>25D</b><br>25" Flood<br><b>40D</b><br>40" Flood<br><b>60D</b><br>60" Flood | <b>A</b><br>112W<br><b>J</b><br>168W<br><b>S</b><br>223W<br><b>U</b><br>215W<br><br><b>B</b><br>86W<br><b>K</b><br>130W<br><b>T</b><br>171W<br><b>U</b><br>215W | <b>30K</b><br>3000K<br><b>40K</b><br>4000K<br><b>57K</b><br>5700K | <b>UL</b><br>Universal<br>120-277V<br><b>UH</b><br>Universal<br>347-480V | <b>BK</b><br>Black<br><b>BZ</b><br>Bronze<br><b>SV</b><br>Silver<br><b>WH</b><br>White | <b>DIM</b><br><b>0-10V Dimming</b><br>- Control by others<br>- Refer to Dimming spec sheet for details<br>- Can't exceed Wattage of specified input power designator<br><br><b>F</b><br><b>Fuse</b><br>When code dictates fusing, use time delay fuse<br><br><b>ML</b><br><b>Multi-Level</b><br>- Refer to ML spec sheet for details<br>- High: 100%, Low: 30%<br>- Intended for downlight applications at 0° tilt<br><br><b>PML</b><br><b>Programmable Multi-Level, 20-40' Mounting Height</b><br>- Refer to PML spec sheet for details<br>- Intended for downlight applications at 0° tilt<br><br><b>PML2</b><br><b>Programmable Multi-Level, 10-30' Mounting Height</b><br>- Refer to PML spec sheet for details<br>- Intended for downlight applications at 0° tilt<br><br><b>Q9</b><br><b>Field Adjustable Output</b><br>- Refer to Field Adjustable Output spec sheet for details<br><br><b>R</b><br><b>NEMA® Photocell Receptacle</b><br>- Intended for downlight applications with maximum 45° tilt<br>- 3-pin receptacle per ANSI C136.10<br>- Photocell and shorting cap by others<br><br><b>RL</b><br><b>Rotate Left</b><br>- LED and optic are rotated to the left<br><br><b>RR</b><br><b>Rotate Right</b><br>- LED and optic are rotated to the right |  |

\*Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Dimensions

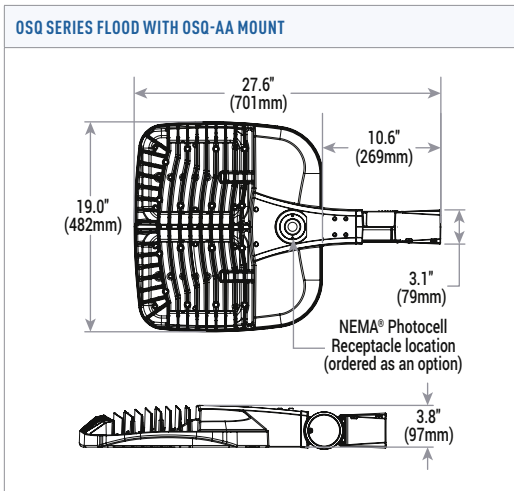

## Accessory Information

### BACKLIGHT SHIELD

OSQ-BLSMF – Front facing optics  
OSQ-BLSMR – Rotated optics

### HAND-HELD REMOTE

XA-SENSREM for PML Option

## You May Also Be Interested In:



**IG SERIES PARKING STRUCTURE**  
Parking Structure Solutions



**XSP SERIES WALL PACK**  
Affordable Site Lighting Solutions



**OSQ SERIES AREA**  
Low-Profile Area Lighting Solutions

## Cree Edge™ Series Flood



## A FLOOD LIGHTING SOLUTION WITH PRECISE OPTICAL CONTROL.

Cree Edge™ Flood products offer precise optical control that is not typically synonymous with flood lighting solutions. Available in multiple optical distributions as well as LED counts and power conditions, Cree Edge™ Flood luminaires offer exacting illumination performance that also maximizes energy savings.

### BENEFITS

- Improved illumination performance
- Significant energy and maintenance savings
- Eliminate the relamping cycle
- Standard 10-year limited warranty

### FEATURES

- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- Exclusive Colorfast DeltaGuard® Finish
- UL wet listed
- Two-Level options
- Modular, low-profile design

### APPLICATIONS

- Airport, auto dealership, corporate & office, education, government & municipal, healthcare, industrial & warehouse, pedestrian & recreation, petroleum & convenience store, restaurant & hospitality, retail & grocery

Cree Edge™ High Output Flood



Cree Edge™ Flood Square



# Cree Edge™ Series Flood


## Ordering Information

Example: FLD-EDG-15-AA-12-E-UL-SV-525-40K




| PRODUCT            | OPTIC   | MOUNTING  | # OF LEDS (x10)                                    | LED SERIES | VOLTAGE  | COLOR OPTIONS  | DRIVE CURRENT  | FACTORY INSTALLED OPTIONS   |
|--------------------|---|---|--|------------|--|--|--|---|
| FLD-EHO<br>FLD-EDG | N6<br>NEMA® 6<br>SN<br>Sign<br>15<br>15°<br>25<br>25°<br>40<br>40°<br>70<br>70° | AA<br>Adjustable Arm<br>SA<br>Side Arm Mount<br>HV<br>Horizontal/Vertical Tenon | 02<br>04<br>06<br>08<br>10<br>12<br>14<br>16<br>24 | E          | UL<br>Universal 120-277V<br>UH<br>Universal 347-480V | BK<br>Black<br>BZ<br>Bronze<br>SV<br>Silver<br>WH<br>White | 350<br>350mA<br>525<br>525mA<br>700<br>700mA<br>1000<br>1000mA | 40K<br>4000K CCT<br>50K<br>5000K CCT<br>DIM<br>0-10V Dimming<br>F<br>Fuse<br>HL<br>High/Low (175/350/525 Dual Circuit Input)<br>P<br>Photocell<br>R<br>NEMA® Photocell Receptacle<br>ML<br>Multi-Level (75/525) |

\* Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Accessory Information

| BIRD SPIKE OPTIONS   | BACKLIGHT CONTROL SHIELDS  |
|--|--|
|  <p><b>XA-BRDSPK</b><br/>(EDG model only)<br/><b>XA-BRDSPKXAK12</b><br/>(EHO models only for 120 LED luminaires)<br/><b>XA-BRDSPKXAK24</b><br/>(EHO models only for 240 LED luminaires)</p> | <p><b>XA-20BLS-4</b><br/>(EDG models only)<br/><b>XA-30BLS-4</b><br/>(EHO models only for 120 luminaires)<br/><b>XA-30BLS-8</b><br/>(EHO models only for 240 luminaires)</p> |

## Dimensions
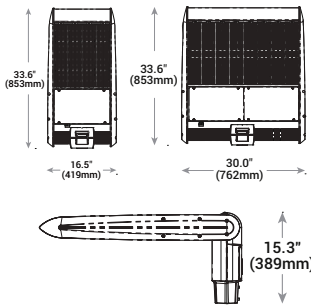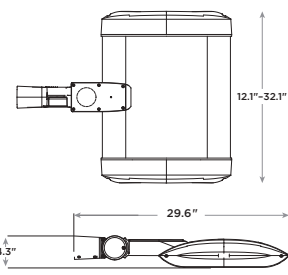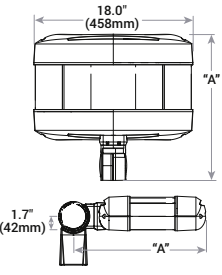
| CREE EDGE™ HIGH OUTPUT FLOOD  | CREE EDGE™ FLOOD SQUARE  | SA MOUNT LINE   |        |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |  |   |                 |          |        |    |               |                |    |               |                |    |               |                |
|---|--|---|--------|----|---------------|----------------|----|---------------|----------------|----|---------------|----------------|----|---------------|----------------|----|---------------|----------------|----|---------------|----------------|----|---------------|----------------|----|---------------|----------------|--|---|-----------------|----------|--------|----|---------------|----------------|----|---------------|----------------|----|---------------|----------------|
| <p><b>HV MOUNT</b></p>  <p>HV Mount (shown in vertical position)</p>   | <p><b>AA MOUNT</b></p>  | <p><b>SA MOUNT</b></p>  |        |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |  |   |                 |          |        |    |               |                |    |               |                |    |               |                |
| <table border="1"> <thead> <tr> <th>LED Count (x10)</th> <th>Dim. "A"</th> <th>Weight</th> </tr> </thead> <tbody> <tr><td>02</td><td>12.1" (306mm)</td><td>21 lbs. (10kg)</td></tr> <tr><td>04</td><td>12.1" (306mm)</td><td>24 lbs. (11kg)</td></tr> <tr><td>06</td><td>14.1" (357mm)</td><td>27 lbs. (12kg)</td></tr> <tr><td>08</td><td>16.1" (408mm)</td><td>28 lbs. (13kg)</td></tr> <tr><td>10</td><td>18.1" (459mm)</td><td>32 lbs. (15kg)</td></tr> <tr><td>12</td><td>20.1" (510mm)</td><td>34 lbs. (15kg)</td></tr> <tr><td>14</td><td>22.1" (560mm)</td><td>37 lbs. (17kg)</td></tr> <tr><td>16</td><td>24.1" (611mm)</td><td>41 lbs. (19kg)</td></tr> </tbody> </table> | LED Count (x10)  | Dim. "A"  | Weight | 02 | 12.1" (306mm) | 21 lbs. (10kg) | 04 | 12.1" (306mm) | 24 lbs. (11kg) | 06 | 14.1" (357mm) | 27 lbs. (12kg) | 08 | 16.1" (408mm) | 28 lbs. (13kg) | 10 | 18.1" (459mm) | 32 lbs. (15kg) | 12 | 20.1" (510mm) | 34 lbs. (15kg) | 14 | 22.1" (560mm) | 37 lbs. (17kg) | 16 | 24.1" (611mm) | 41 lbs. (19kg) |  | <table border="1"> <thead> <tr> <th>LED Count (x10)</th> <th>Dim. "A"</th> <th>Weight</th> </tr> </thead> <tbody> <tr><td>02</td><td>16.0" (406mm)</td><td>25 lbs. (11kg)</td></tr> <tr><td>04</td><td>18.0" (457mm)</td><td>26 lbs. (12kg)</td></tr> <tr><td>06</td><td>20.0" (508mm)</td><td>28 lbs. (13kg)</td></tr> </tbody> </table> | LED Count (x10) | Dim. "A" | Weight | 02 | 16.0" (406mm) | 25 lbs. (11kg) | 04 | 18.0" (457mm) | 26 lbs. (12kg) | 06 | 20.0" (508mm) | 28 lbs. (13kg) |
| LED Count (x10)   | Dim. "A"   | Weight  |        |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |  |   |                 |          |        |    |               |                |    |               |                |    |               |                |
| 02  | 12.1" (306mm)  | 21 lbs. (10kg)  |        |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |  |   |                 |          |        |    |               |                |    |               |                |    |               |                |
| 04  | 12.1" (306mm)  | 24 lbs. (11kg)  |        |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |  |   |                 |          |        |    |               |                |    |               |                |    |               |                |
| 06  | 14.1" (357mm)  | 27 lbs. (12kg)  |        |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |  |   |                 |          |        |    |               |                |    |               |                |    |               |                |
| 08  | 16.1" (408mm)  | 28 lbs. (13kg)  |        |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |  |   |                 |          |        |    |               |                |    |               |                |    |               |                |
| 10  | 18.1" (459mm)  | 32 lbs. (15kg)  |        |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |  |   |                 |          |        |    |               |                |    |               |                |    |               |                |
| 12  | 20.1" (510mm)  | 34 lbs. (15kg)  |        |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |  |   |                 |          |        |    |               |                |    |               |                |    |               |                |
| 14  | 22.1" (560mm)  | 37 lbs. (17kg)  |        |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |  |   |                 |          |        |    |               |                |    |               |                |    |               |                |
| 16  | 24.1" (611mm)  | 41 lbs. (19kg)  |        |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |  |   |                 |          |        |    |               |                |    |               |                |    |               |                |
| LED Count (x10)   | Dim. "A"   | Weight  |        |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |  |   |                 |          |        |    |               |                |    |               |                |    |               |                |
| 02  | 16.0" (406mm)  | 25 lbs. (11kg)  |        |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |  |   |                 |          |        |    |               |                |    |               |                |    |               |                |
| 04  | 18.0" (457mm)  | 26 lbs. (12kg)  |        |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |  |   |                 |          |        |    |               |                |    |               |                |    |               |                |
| 06  | 20.0" (508mm)  | 28 lbs. (13kg)  |        |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |    |               |                |  |   |                 |          |        |    |               |                |    |               |                |    |               |                |

## You May Also Be Interested In:



**VG SERIES PARKING STRUCTURE**  
Scalable, Versatile Parking Structure Solutions



**CREE EDGE™ SERIES WALL MOUNT**  
Wall Mount Lighting Solutions



**CREE EDGE™ AREA**  
Sleek, Modular Area Lighting Solutions

## 304 Series™ Flood



304 Series™ Flood



## A VERSATILE LED FLOOD SOLUTION THAT'S ALSO AFFORDABLE.

The Cree 304 Series™ Flood luminaire provides precise optical control with nearly a dozen cataloged distributions to select from to effectively illuminate a wide range of projects. Combined with a yoke mount, our 304 Series Flood luminaire is both versatile and an affordable LED solution that doesn't sacrifice performance.

### BENEFITS

- Improved illumination performance
- Significant energy and maintenance savings
- Eliminate the relamping cycle
- Standard 10-year limited warranty

### FEATURES

- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- Exclusive Colorfast DeltaGuard® Finish
- UL wet listed
- Low-profile design

### APPLICATIONS

- Airport, auto dealership, corporate & office, education, government & municipal, healthcare, industrial & warehouse, pedestrian & recreation, petroleum & convenience store, restaurant & hospitality, retail & grocery, roadway

# 304 Series™ Flood

## Ordering Information

Example: FLD-304-2M-YM-04-E-UL-SV-350

| PRODUCT   | OPTIC          | MOUNTING         | # OF LEDS (X10)        | LED SERIES | VOLTAGE  | COLOR OPTIONS  | DRIVE CURRENT  | FACTORY INSTALLED OPTIONS  |           |
|-----------|----------------|------------------|------------------------|------------|--|--|--|--|-----------|
| FLD-304   | <b>2M</b>      | YM<br>Yoke Mount | <b>04</b><br><b>06</b> | E          | UL<br>Universal<br>120-277V<br><br>UH<br>Universal<br>347-480V | BK<br>Black<br><br>BZ<br>Bronze<br><br>SV<br>Silver<br><br>WH<br>White | 350<br>350mA<br><br>525<br>525mA<br><br>700<br>700mA | 40K<br>4000K CCT<br><br>DIM<br>0-10V Dimming<br><br>F<br>Fuse<br><br>ML<br>Multi-Level<br><br>PML<br>Programmable<br>Multi-Level |           |
|           | Type II Medium |                  |                        |            |  |  |  |  | 15°       |
|           | <b>3M</b>      |                  |                        |            |  |  |  |  | Flood     |
|           | Type III       |                  |                        |            |  |  |  |  | <b>25</b> |
|           | Medium         |                  |                        |            |  |  |  |  | 25°       |
|           | <b>5M</b>      |                  |                        |            |  |  |  |  | Flood     |
|           | Type V Medium  |                  |                        |            |  |  |  |  | <b>40</b> |
|           | <b>5S</b>      |                  |                        |            |  |  |  |  | 40°       |
|           | Type V Short   |                  |                        |            |  |  |  |  | Flood     |
|           | <b>N6</b>      |                  |                        |            |  |  |  |  | <b>70</b> |
|           | NEMA® 6        |                  |                        |            |  |  |  |  | 70°       |
|           | <b>SL</b>      |                  |                        |            |  |  |  |  | Flood     |
|           | Sparkle        |                  |                        |            |  |  |  |  |           |
|           | Petroleum      |                  |                        |            |  |  |  |  |           |
| <b>SN</b> |                |                  |                        |            |  |  |  |  |           |
| Sign      |                |                  |                        |            |  |  |  |  |           |

\* Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Accessory Information

### FIELD-INSTALLED


#### Hand-Held Remote

XA-SENSREM

- For successful implementation of the programmable multi-level option, a minimum of one hand-held remote is required

## Dimensions

### 304 SERIES™ FLOOD

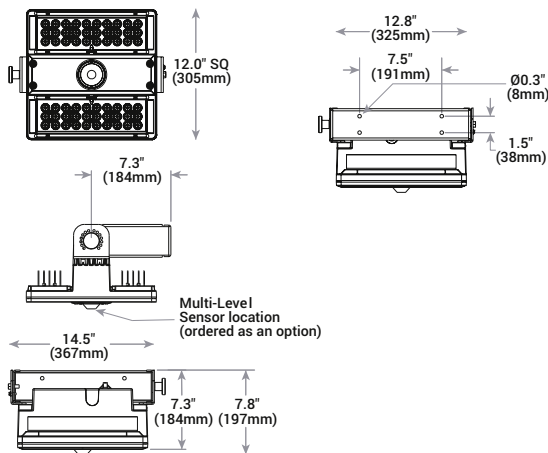

| LED Count (x10) | WEIGHT          |
|-----------------|-----------------|
| 04              | 23 lbs (10.4kg) |
| 06              | 23 lbs (10.4kg) |

## You May Also Be Interested In:



**304 SERIES™ CANOPY**  
Canopy Lighting Solutions



**304 SERIES™ PARKING STRUCTURE**  
Low-Profile Parking Structure Lighting Solutions



**304 SERIES™ INTERIOR**  
High-Performance Interior Lighting Solutions

## OL Series™ Linear Flood



OL Series™ Linear Flood



## AN OUTSIDE-THE-BOX APPROACH TO FLOOD LIGHTING.

Who says floodlights can't be elegant? Our OL Series™ takes the floodlight away from the old "shoe box" design and into an aesthetically pleasing form that doesn't sacrifice performance. Available in 2-, 4- and 8-foot lengths, the OL Series is durably built for outdoor applications, but with an architectural appeal not found in many solutions today. With multiple optical distributions, LED counts and power conditions, the OL Series is versatile enough for both accent lighting or general illumination needs.

### BENEFITS

- Improved illumination performance
- Significant energy and maintenance savings
- Eliminate the relamping cycle
- Standard 10-year limited warranty

### FEATURES

- Minimum 70 CRI
- CCT: 3500K (+/- 100K), 4000K (+/- 100K), 5700K (+/- 500K)
- Exclusive Colorfast DeltaGuard® Finish
- UL wet listed
- Modular, low-profile design
- Rotatable luminaire for proper aiming and uniform illumination

### APPLICATIONS

- Airport, auto dealership, corporate & office, education, government & municipal, healthcare, industrial & warehouse, pedestrian & recreation, petroleum & convenience store, restaurant & hospitality, retail & grocery



## OL Series™ Linear Flood

## Ordering Information

Example: FLD-OL-25-D4-07-E-UL-WH-700-40K

| PRODUCT           | OPTIC                       | MOUNTING                                  | LED COUNT PER FOOT | LED SERIES | VOLTAGE                            | COLOR OPTIONS      | DRIVE CURRENT       | FACTORY INSTALLED OPTIONS |                                    |                     |                                   |                             |
|-------------------|-----------------------------|---|--------------------|------------|------------------------------------|--------------------|---------------------|---------------------------|------------------------------------|---------------------|-----------------------------------|-----------------------------|
| FLD-OL            | <b>2M</b><br>Type II Medium | <b>D2</b><br>Direct Rotatable - 2' (.6m)  | <b>07</b>          | <b>E</b>   | <b>UL</b><br>Universal<br>120-277V | <b>BK</b><br>Black | <b>350</b><br>350mA | <b>35K</b><br>3500K CCT   |                                    |                     |                                   |                             |
|                   | <b>15</b><br>15° Flood      | <b>D4</b><br>Direct Rotatable - 4' (1.2m) | <b>14</b>          |            |                                    |                    |                     |                           | <b>BZ</b><br>Bronze                | <b>525</b><br>525mA | <b>40K</b><br>4000K CCT           |                             |
|                   | <b>25</b><br>25° Flood      | <b>D8</b><br>Direct Rotatable - 8' (2.4m) |                    |            |                                    |                    |                     |                           | <b>UH</b><br>Universal<br>347-480V | <b>SV</b><br>Silver | <b>700</b><br>700mA<br>(Standard) | <b>DIM</b><br>0-10V Dimming |
|                   | <b>40</b><br>40° Flood      |   |                    |            |                                    |                    |                     |                           | <b>WH</b><br>White                 |                     |                                   |                             |
|                   | <b>N6</b><br>NEMA® 6        |   |                    |            |                                    |                    |                     |                           |                                    |                     |                                   |                             |
| <b>SN</b><br>Sign |                             |   |                    |            |                                    |                    |                     |                           |                                    |                     |                                   |                             |

\* Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Field Installed Accessories

| 9" (229MM) EXTENSION ARM  | 12" (305MM) EXTENSION ARM  | 18" (457MM) EXTENSION ARM  |
|---|--|--|
| Spaces luminaire center 9" (229mm) away from the mounting surface<br><b>XA-XFR9SV</b><br><b>XA-XFR9WH</b><br><b>XA-XFR9BK</b><br><b>XA-XFR9BZ</b> | Spaces luminaire center 12" (305mm) away from the mounting surface<br><b>XA-XFR12SV</b><br><b>XA-XFR12WH</b><br><b>XA-XFR12BK</b><br><b>XA-XFR12BZ</b> | Spaces luminaire center 18" (457mm) away from the mounting surface<br><b>XA-XFR18SV</b><br><b>XA-XFR18WH</b><br><b>XA-XFR18BK</b><br><b>XA-XFR18BZ</b> |

## Dimensions

| OL SERIES™ FLOOD   |
|--|
| <p>25.3" (0.64mm) for 2'<br/>48.5" (1.2mm) for 4'<br/>95.9" (2.4mm) for 8'</p> <p>6.5" (165mm)</p> <p>4" (102mm)</p> |

## You May Also Be Interested In:



**CREE EDGE™ SERIES FLOOD**  
Flood Lighting Solutions



**304 SERIES™ FLOOD**  
Low-Profile Flood Lighting Solutions



**304 SERIES™ INTERIOR**  
High-Performance Interior Lighting Solutions

## LED WALL MOUNT

Nothing speaks to security like reliability. Cree® LED products were created utilizing a from-the-ground-up design philosophy that incorporates exceptional thermal management with high-quality components and an unmatched paint finish, making Cree LED solutions highly reliable. The result is an LED system capable of providing more than a decade of near maintenance-free service.



---

**XSP Series**

p.146



- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- Up to 100 lumens per watt
- Two light outputs
- XSP family aesthetics

---

**Cree Edge™ Series**

p.148



- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- UL wet listed
- Multi-Level options
- Modular, low-profile design

## XSP Series Wall Pack



XSPW™



## SITE SAFETY WITH LOW COST OF OWNERSHIP.

The XSPW™ LED Wall Pack leverages Cree's innovative technology, developed for the industry-leading XSP Series street lights, offering customers a premier site lighting solution that incorporates exceptional thermal management with high-quality components and an unmatched paint finish, making Cree® LED solutions highly reliable. The result is an LED system capable of providing more than a decade of near maintenance-free service.

### BENEFITS

- Upgrade existing wall packs with ease
- High-quality, even illumination that is virtually maintenance free
- Up to 65% energy savings compared to Metal Halide
- Eliminate the relamping cycle
- Combine with the XSP Area for a complete site lighting solution

### FEATURES

- Minimum 70 CRI
- CCT: 4000K (+/- 300K), 5700K (+/- 500K)
- NanoOptic® Precision Delivery Grid™ optic
- Exclusive Colorfast DeltaGuard® Finish
- Photocell, Dimming and Multi-Level options available
- Suitable for wet locations

### APPLICATIONS

- Airport, auto dealership, corporate & office, education, government, healthcare, industrial & warehouse, municipal, parking, petroleum & convenience stores, recreation & public venues, restaurants & hospitality, retail & grocery

## XSP Series Wall Pack

## Ordering Information

Example: XSPW-A-0-3-F-C-U-S

| PRODUCT | VERSION | MOUNTING        | OPTIC   | MODULES                                | INPUT POWER DESIGNATOR | VOLTAGE  | COLOR OPTIONS  | FACTORY INSTALLED OPTIONS                                |
|---------|---------|-----------------|---|--|------------------------|--|--|--|
| XSPW    | A       | 0<br>Wall Mount | 2<br>Type II<br>Medium<br>3<br>Type III<br>Medium | F<br>Module 4000K<br>M<br>Module 5700K | C<br>42W<br>G<br>25W   | U<br>Universal<br>120-277V<br>1<br>120V<br>2<br>208-277V | Z<br>Bronze<br>T<br>Black<br>S<br>Silver<br>W<br>White | Y<br>0-10V Dimming<br>P<br>Photocell<br>K<br>Multi-Level |

\* Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Accessories


## FIELD -INSTALLED

## Beauty Plate

WM-PLT12\*\* - 12" (305mm) Square  
WM-PMT14\*\* - 14" (356mm) Square  
- Covers holes left by incumbent wall packs

## Dimensions

## XSPW" WALL PACK

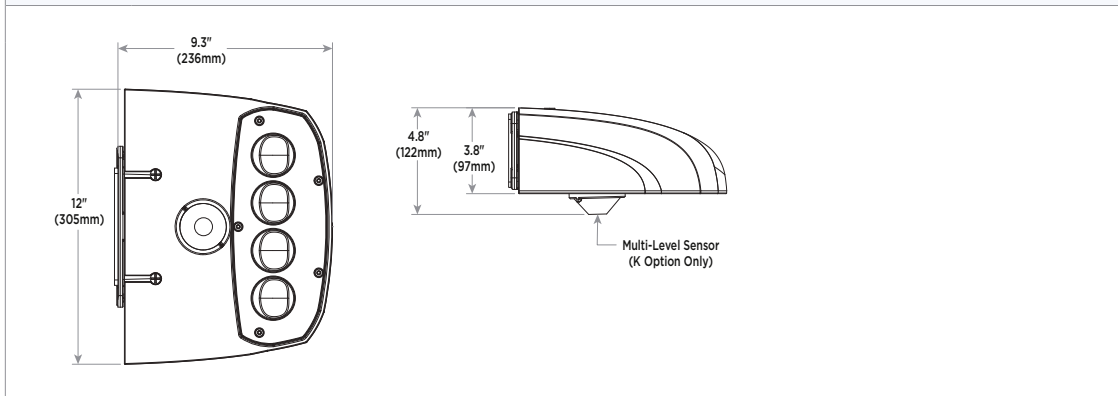

## You May Also Be Interested In:



**OSQ SERIES FLOOD**  
Flood Lighting Solutions



**XSP SERIES AREA**  
Aesthetic Area Lighting Solutions



**IG SERIES PARKING STRUCTURE**  
Parking Structure Solutions

## Cree Edge™ Series Security



Cree Edge™ Security



## BEING SAFE DOESN'T MEAN YOU HAVE TO SACRIFICE STYLE.

Successfully launched in 2007, Cree Edge™ security luminaires helped set the standard for performance and value. Available in 20-LED increments (20 to 120 LEDs), multiple power conditions and optical distributions, Cree Edge™ security luminaires offer a scalable solution that provides precise illumination performance. Cree Edge™ Security luminaires have continued to advance over the years and offer more value today than ever before.

### BENEFITS

- Improved illumination performance
- Significant energy and maintenance savings
- Eliminate the relamping cycle
- Standard 10-year limited warranty

### FEATURES

- Minimum 70 CRI
- CCT: 4000K (+/-300K), 5700K (+/-500K)
- Exclusive Colorfast DeltaGuard® Finish
- Utilizes BetaLED® Technology
- UL wet listed
- International Dark Sky Association approved
- Multi-Level options
- Modular, low-profile design

### APPLICATIONS

- Airport, auto dealership, corporate & office, education, government & municipal, healthcare, industrial & warehouse, pedestrian & recreation, petroleum & convenience store, restaurant & hospitality, retail & grocery

## Cree Edge™ Series Security

## Ordering Information

Example: SEC-EDG-2M-WM-06-E-UL-SV-525-DIM


| PRODUCT | OPTIC                      |                             | MOUNTING         | # OF LEDs (X10) | LED SERIES | VOLTAGE                     | COLOR OPTIONS | DRIVE CURRENT | FACTORY INSTALLED OPTIONS |                          |
|---------|----------------------------|-----------------------------|------------------|-----------------|------------|-----------------------------|---------------|---------------|---------------------------|--------------------------|
| SEC-EDG | <b>2M</b>                  | <b>3M</b>                   | WM<br>Wall Mount | <b>02</b>       | E          | UL<br>Universal<br>120-277V | BK<br>Black   | 350<br>350mA  | 40K<br>4000K CCT          |                          |
|         | Type II Medium             | Type III Medium             |                  | <b>04</b>       |            |                             |               |               |                           | <b>DIM</b>               |
|         | <b>2MB</b>                 | <b>3MB</b>                  |                  | <b>06</b>       |            |                             |               |               |                           | 0-10V Dimming            |
|         | Type II Medium w/Backlight | Type III Medium w/Backlight |                  | <b>08</b>       |            |                             |               |               |                           | <b>F</b>                 |
|         | Shield                     | Shield                      |                  | <b>10</b>       |            |                             |               |               |                           | Fuse                     |
|         | <b>2S</b>                  | <b>4M</b>                   |                  | <b>12</b>       |            |                             |               |               |                           | <b>ML</b>                |
|         | Type II Short              | Type IV Medium              |                  |                 |            |                             |               |               |                           | Multi-Level (75/525)     |
|         | <b>2SB</b>                 | <b>4MB</b>                  |                  |                 |            |                             |               |               |                           | <b>P</b>                 |
|         | Type II Short w/Backlight  | Type IV Medium w/Backlight  |                  |                 |            |                             |               |               |                           | Photocell                |
|         | Shield                     | Shield                      |                  |                 |            |                             |               |               |                           | <b>PML</b>               |
|         |                            |                             |                  |                 |            |                             |               |               |                           | Programmable Multi-Level |

\* Ordering information is for reference only. Some product configurations are not available. Please consult spec sheets for specific product availability and for further details.

## Accessory Information

## BIRD SPIKE OPTION

XA-BRDSPK




## HAND-HELD REMOTE

XA-SENSREM for PML Option

## Dimensions

## CREE EDGE™ SECURITY

## WM MOUNT

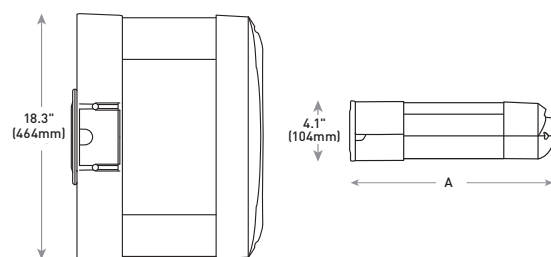

| LED Count (x10) | DIM. "A"      | WEIGHT          |
|-----------------|---------------|-----------------|
| 02              | 9.9" (251mm)  | 20 lbs (9.1kg)  |
| 04              | 11.9" (303mm) | 22 lbs (10.0kg) |
| 06              | 13.9" (353mm) | 25 lbs (11.3kg) |
| 08              | 15.9" (404mm) | 27 lbs (12.2kg) |
| 10              | 17.9" (455mm) | 31 lbs (14.1kg) |
| 12              | 19.9" (505mm) | 32 lbs (14.5kg) |

## You May Also Be Interested In:



## VG SERIES PARKING STRUCTURE

Scalable, Versatile Parking Structure Solutions



## CREE EDGE™ AREA

Sleek, Modular Area Lighting Solutions



## CREE EDGE™ SERIES PATHWAY

Pathway Lighting Solutions





**Notes** \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

# FAST COMPANY 2015 MOST INNOVATIVE COMPANIES

**It's Official: We're #1 in Energy Innovation.**

Each year, Fast Company recognizes companies and products that transform how we consume energy, and for 2015, Cree was #1 in the Energy Innovation sector and #19 in Overall Innovation.

#### **CREE, INC. HEADQUARTERS**

4600 Silicon Drive  
Durham, NC, USA 27703  
**Main:** (919) 313-5300  
**US Toll Free:** (800) 533-2583  
**Fax:** (919) 313-5558

#### **CREE CUSTOMER SERVICE**

9201 Washington Avenue  
Racine, WI, USA 53406  
**Main:** (800) 236-6800  
**Fax:** (262) 504-5415  
info@cree.com

#### **Customer Service Hours**

7am-5pm CST

#### **CREE CANADA**

6889 Rexwood Rd., Unit 3  
Mississauga, ON, L4V 1R2 Canada  
**Main:** (800) 473-1234  
**Fax:** (800) 890-7507  
CreeLightingCanada@cree.com

#### **Customer Service Hours**

7am-5pm CST

#### **CREE ASIA PACIFIC SALES**

6/F, Green 18  
18 Science Park East Avenue  
Hong Kong Science Park  
Shatin, Hong Kong  
**Main:** +852 2424 8228  
CreeLightingAsia@cree.com

#### **CREE AUSTRALIA SALES**

PO Box 470  
Moorebank NSW 2170  
Sydney, Australia  
**Main:** +61 401 496363  
CreeLightingAustralia@cree.com

#### **CREE EUROPE, MIDDLE EAST & AFRICA SALES**

Via San Mirocle 7  
20138 Milano, Italy  
**Main:** +39 346 8260676  
CreeLightingEurope@cree.com

Visit [lighting.cree.com](http://lighting.cree.com) or contact a Cree lighting representative to learn more.

© 2016 Cree, Inc. All rights reserved. For informational purposes only. Not a warranty or specification. See [www.cree.com/lighting](http://www.cree.com/lighting) for warranty and specifications. Cree®, TrueWhite®, Cree TrueWhite®, the Cree TrueWhite Technology logo, SmartCast®, Colorfast DeltaGuard®, NanoOptic®, Essentia®, LEDway® and Crown-Weld® are registered trademarks and CR4™, CR6™, LR6™, CR80™, CR100™, CR150™, LR150™, LR200™, CR14™, CR22™, CR24™, CS14™, CS18™, DiamondFacet™, KR4™, KR6™, KR8™, OneButton™, OSQ™, Precision Delivery Grid™, RSW™, RUL™, UR2-24™, UR2-48™, UR3-24™, WS4™, Cree Edge™, XSP1™, XSP2™, XSPR™, XSPW™, WaveMax™, ZR14™, ZR22™, ZR24™, the Cree logo, OL Series™, CPY250™, 228 Series™, and 304 Series™ are trademarks of Cree, Inc. Lutron®, EcoSystem®, Hi-Lume® and the Lutron Ecosystem Enabled logo are registered trademarks of Lutron Electronics Co., Inc. Lumec® is a registered trademark of Lumec Inc. Holophane, Esplanade and Washington PostLite are registered trademarks of ABL IP Holding LLC. The UL logo is a registered trademark of UL LLC. The Energy Star logo is a registered trademark of the U.S. EPA.  
CAT/CREE-0513 Rev. Date: 07/07/2016

