



L.H.

LIK HUNG



東莞力雄五金電器塑膠制品有限公司

DONG GUAN LIK HUNG METAL ELECTRON & PLASTIC PRODUCTS CO., LTD.

LIK HUNG



V箱系列
V-series



K箱系列
K-series



T箱系列
T-series

常用KTV箱型號 / 規格表

Specification For K. T. V. Panel

L.H.
LIK HUNG



	編號 Model	分巴合計 No of ways	可配蘇位 No of sockets/ switchs	X (MM)	Y (MM)
<p>165mm</p> <p>60A-100A總制箱</p>	K9	9位	4個	650	625
	K13	13位	4個	650	740
	K17	17位	4個	650	840
	K21	21位	4個	650	940
<p>165mm</p> <p>60A-100A總制箱</p>	V9	9位	2個	965	400
	V13	13位	4個	965	500
	V17	17位	6個	965	600
	V21	21位	8個	965	710
<p>165mm</p> <p>60A-100A總制箱</p>	T13	13位	12個	890	710
	T17	17位	14個	890	810
	T21	21位	16個	890	900
	T25	25位	18個	890	1000



全自動補償櫃功能

所有電容能抵禦以下情況：

- 1、10%超額電壓
- 2、30%超載電流
- 3、35%超出額定值輸出

Function:

All capacitor can resist the following:

1. 10% over voltage
2. 30% over current
3. 35% over rated output

當有故障時，電容器自動切斷電源，及自動放電。

During disorder, the capacitor will cut the electrical supply and discharge AUTOMATICALLY.


多級數調節器有以下設備：

- 1、電源指示燈；
- 2、功率因素顯示；
- 3、手動/自動控制及指示燈；
- 4、延時裝置；
- 5、級數接連指示燈。

RPCR has the following function:

1. current indicator
2. power factor indicator
3. manual/automatic control and indicator
4. time relay
5. stage indicator



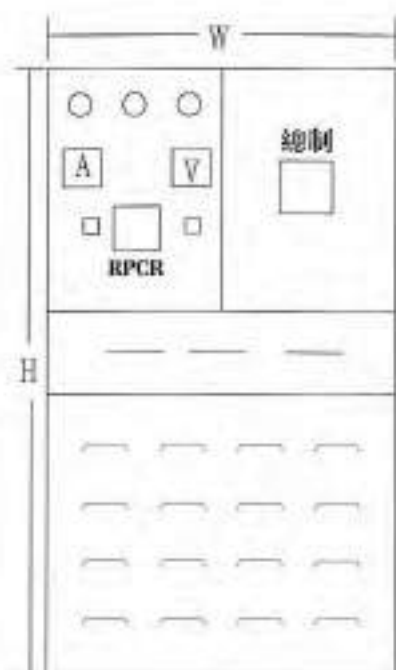

平面圖
Front View



側面圖
Side View

	型號 Model	補償數值 kvar	級數 Stage	櫃外型尺寸 Size(WXHXD)
1	T060	60kvar	6	1000x1730x600
2	T090	90kvar	6	1000x1730x600
3	T120	120kvar	6	1000x1730x600
4	T180	180kvar	6	1000x1730x600
5	T240	240kvar	12	1220x2185x900
6	T360	360kvar	12	1220x2185x900
7	T480	480kvar	12	1220x2185x1065
8	T600	600kvar	12	1220x2185x1065

為提高整個用戶所有設備的功率因數，其中一個有效的方法是在總電源處加上適當的電容，而電容必須與設備并聯連接，因為此接法可加強穩定供應用電設備的電壓。

To increase the power factor of all facilities, one of the effective method is to add suitable capacitors connect with the main power supply. The capacitors must connect to the loading facility and make the voltage of the circuit stable.

低壓配電櫃

Low Voltage Power Supply Panel

L.H.
LIK HUNG




工廠車間總配電櫃(加裝自動補償器)

Main Power Supply Panel(With Capacitor Bank)

L.H.
LIK HUNG



工廠車間總配電櫃 (加裝自動補償器)
Main Power Supply Panel(With Capacitor Bank)

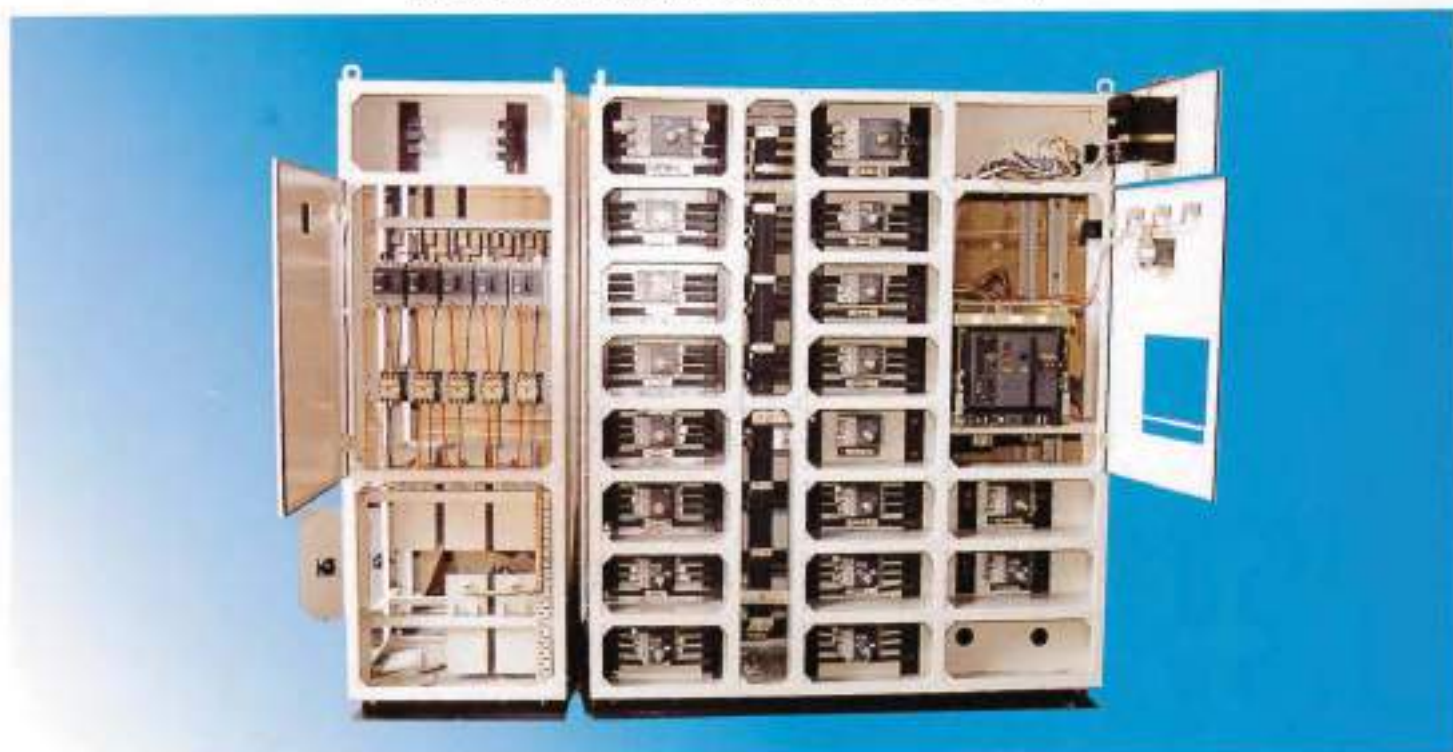

此櫃外表美觀大方，使用安全方便（加裝水氣表），總制與分制連接採用紅銅排（經電鍍處理），銅排套用絕緣伸縮膠，使電流通流更穩定，使用更安全。另加裝電容自動補償，對照明、機械、器材更具保護作用。

This panel is attractive, with a save and convenient usage (Earth-Fault Relay). Main swith is connected to branch switches with galvanized copper bar. Copper bar is covered with isolate plastic tube. This will make the current more stable and save. After adding capacitors, the facilities for lighting and mechanics will be more protected.

低壓配電櫃

Low Voltage Power Supply Panel

L.H.
LIK HUNG



全部開關制之間選用銅排（日本進口銅）連接，使電流過流更平穩。

All switches are connected with import copper bar, which will make circuit more stable.



工廠電房2500A配電櫃，市電、發電轉換。
A factory-used 2500Amps electrical supply panel, with city power / self-generated current manual-changed switch.



選用厚絕緣電木板封面，使用更安全、保險。
Thick insulated laminated sheets are used inside the panel, making it more safe and insured.


常用配電櫃型號 / 規格一覽表

Standard Power Supply Panel/Specification

L.H.
LIK HUNG



	型號 Model	總制A數 Amps of Main Current	可裝分制 NO of Branch Switches	外型尺寸 (W×H×D) Size
1	LH0400A	300A 400A	100A×3個	1117x1524x600
			60A×3個	
			30A×3個	
	LH0600A	500A 600A	150A×3個	
			100A×3個	
			60A×3個	
3	LH0800A	800A	300A×3個	1220x1830x760
			200A×3個	
			100A×3個	
	LH1000A	1000A	400A×3個	
			200A×4個	
			100A×4個	
5	LH1200A	1200A	500A×2個	1320x1980x950
			400A×2個	
			200A×3個	
			100A×3個	

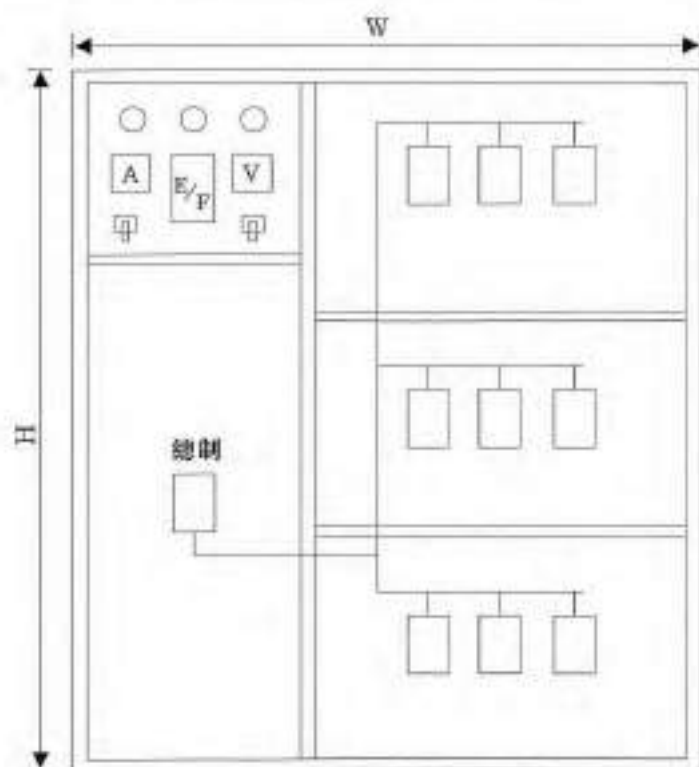



材料： 全部選用鋁合金，主要功能特點：四面掩門，每頁門裝有防水膠邊，櫃頂有防水疏氣孔，內置溫控器，能自動降溫，自動抽氣。

Material: produce with aluminium alloy, 4 side with doors, each door is equipped with gasket. Waterproof ventilation hole is found at the top of the cabinet. This cabinet is equipped with a temperature controller to cool down with ventilation automatically.


主要用途： 露天式電訊機櫃。

Main usage: outdoor type telecommunication cable cabinet.



琴式控制臺
Piano-type control tower

支掌式櫃蓋, 使用方便
Top cover with supporter, convenient to use

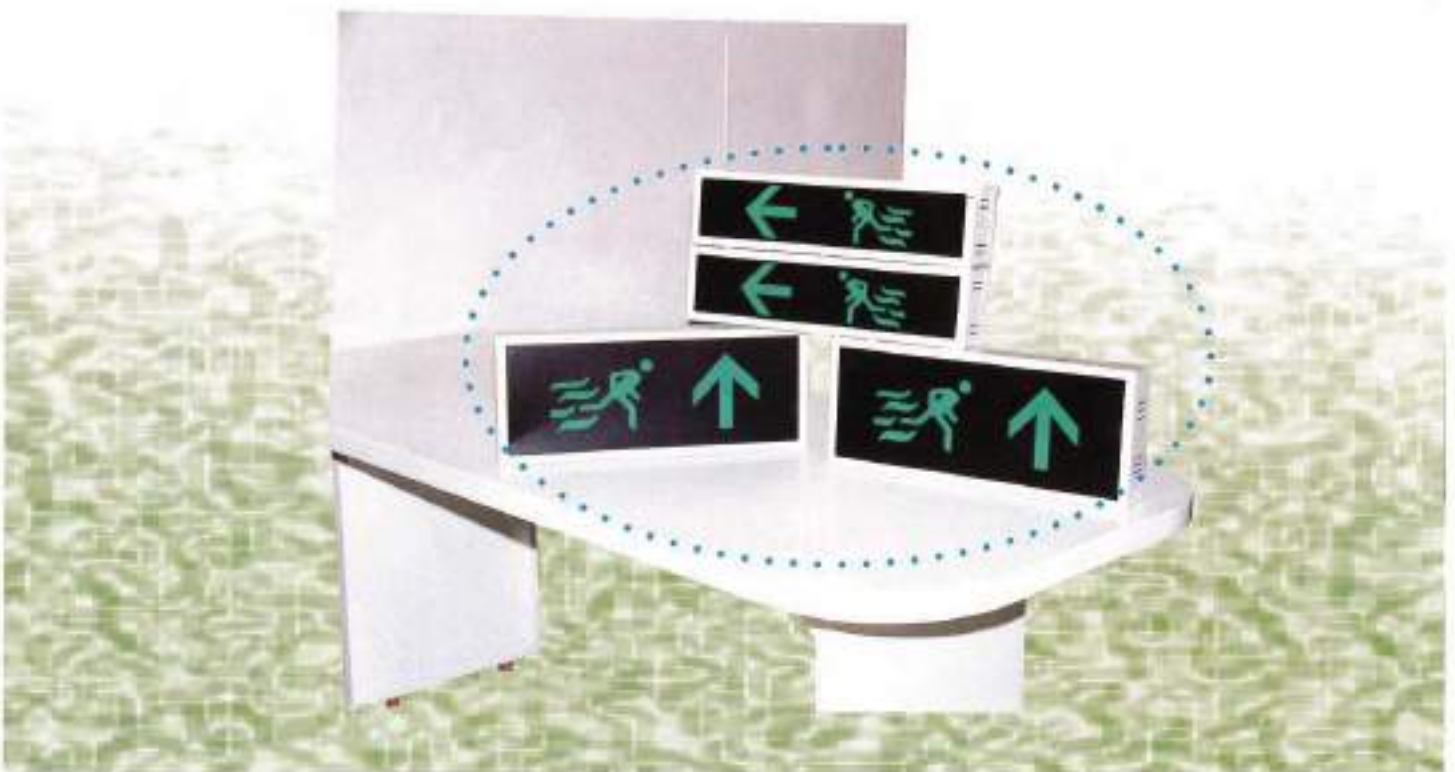

出路燈箱
Road-sign luminous

并車櫃 轉換制櫃

Panels For Join-Generators Power Supply and Change-Over Switches

L.H.
LIK HUNG



并車櫃
Panels for power supply from several
generators join together



轉換制櫃
Panels for change-over switches



選用電木封面

Cover with isolated laminated sheet



採用梯級式排巴，接綫方便安全

Bus-bar arranged in stairs type, easy for connection and safety

常用巴箱型號、規格表

型號 Model	可過載電流 Amps of Main Current	規格WxHxD Size
BX100200	100A - 200A	400x400x200 600x400x200 900x400x200
BX300400	300A - 400A	400x500x250 600x500x250 900x500x250
BX500600	500A - 600A	400x600x300 600x600x300 900x600x300
BX8001000	800A - 1000A	400x700x350 600x700x350 900x700x350



LH 牌排骨箱是我們公司的主要產品，它具有設計合理、安全、外表美觀、方便使用、易裝置。更具有如下特點和功能：

標準規格：

主巴電流：200A

分巴電流：60A

電壓：240 / 415V 50Hz

可裝置：1P 2P 3P MCB

LH distribution board is our company's main product. It has an attractive and safe design with a convenient usage, easy to install. It has the following function:

Standard Specification:

Main current: 200A

Branch Current: 60A


Voltage: 240/415V 50Hz

Suitable Installation: 1p, 2p, 3p MCB



歐式MCB 排骨巴

Rib-shape Busbar Connector for MG, Hager, ABB MCB.

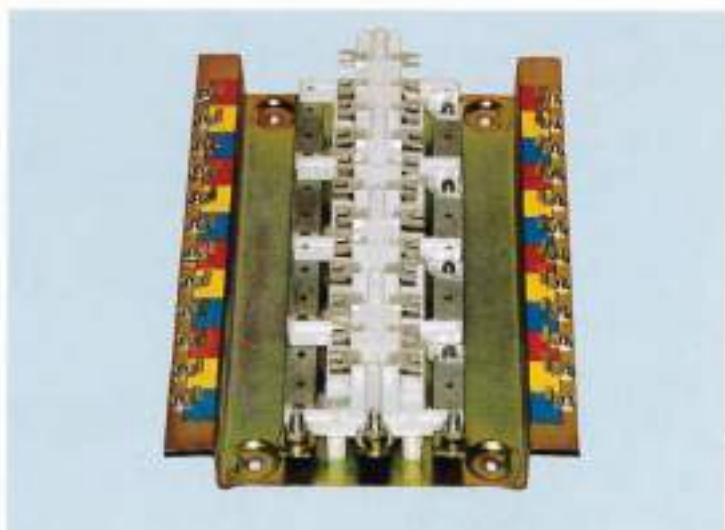

三菱 BH M3 排骨巴


Rib-shape Busbar Connector for BH M3 MCB





型號 Model	位數 No of Ways	規格Size (mm) 寬(W)x深(D)x高(H)
CSM-02	2 W/O	380x110x338
CSM-04	4 W/O	380x110x366
CSM-06	6 W/O	380x110x418
CSM-08	8 W/O	380x110x467
CSM-10	10 W/O	380x110x546
CSM-12	12 W/O	380x110x586
CSM-14	14 W/O	380x110x656
CSM-16	16 W/O	380x110x716
CSM-18	18 W/O	380x110x766
CSM-20	20 W/O	380x110x816
CSM-22	22 W/O	380x110x866

CSM-102	2 C/W	380x110x450
CSM-104	4 C/W	380x110x480
CSM-106	6 C/W	380x110x530
CSM-108	8 C/W	380x110x580
CSM-110	10 C/W	380x110x660
CSM-112	12 C/W	380x110x700
CSM-114	14 C/W	380x110x770
CSM-116	16 C/W	380x110x830
CSM-118	18 C/W	380x110x 880
CSM-120	20 C/W	380x110x930
CSM-122	22 C/W	380x110x980

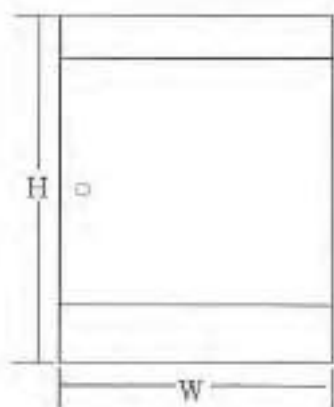

鋼質通訊機櫃

Steel Telecommunication Panel

L.H.
LIK HUNG




材料:

選用優質鋼板，再經靜電噴塗。

Material: using high quality steel sheet and epoxy powder coating outside

主要功能: 四面生動蓋掩門，配置手挽抽，有鑰匙，通風式頂蓋設計，可配抽拉式內橫板。

Main functions: 4 sides with doors, each door is equipped with handle and key lock. Ventilational type top cover, accessory with sliding type decks.

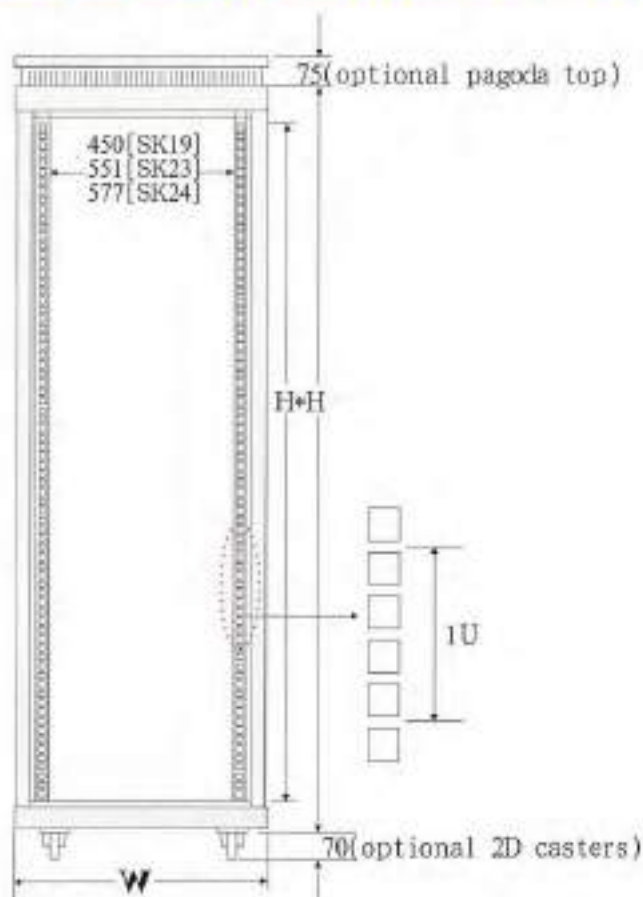

系列 Series	櫃內尺寸 Panel Width	櫃外尺寸 W(External Width)
Sk19	482.6mm	600mm
Sk23	584.2mm	702mm
Sk24	609.6mm	727mm

櫃內深度 Nominal Depths	外計深度 D (External Depth)	D*	
		Max	Min
600	619mm	482mm	102mm
900	770mm	634mm	102mm

型號 Model	櫃內高度 H*(Usable Height)	外計高度 H(External Height)
24U	1067mm	1214mm
32u	1422mm	1569mm
36U	1600mm	1747mm
39U	1734mm	1881mm
42U	1867mm	2014mm
45U	2000mm	2147mm

露天防風雨電表箱

Outdoor Waterproof Watt-Meters Panel

L.H.
LIK HUNG






組合式露天用避水箱型號規格一覽表
Specification of outdoor waterproof panel

	型號 Model	規格HxWxD Size	配腳架 Stand model
1	WP5448	1220x1370x350	L54
2	WP4848	1220x1220x350	L48
3	WP4836	1220x900x300	L36
4	WP3636	900x900x300	L36
5	WP3624	900x600x300	L24
6	WP2424	600x600x300	L24
7	L54腳架	600x1370x350	
8	L48腳架	600x1220x350	
9	L36腳架	600x900x300	
10	L24腳架	600x600x300	

露天用避水箱結構圖
Structural diagram of outdoor waterproof panel

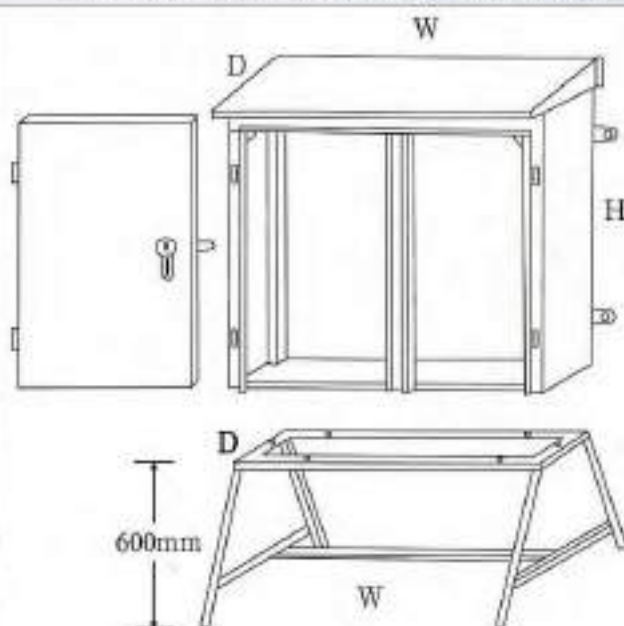



力雄五金制品有限公司
LIK HUNG METAL WORKS LTD.

總行：九龍長沙灣長順街5號地下

5, CHEUNG SHUN ST., G/F, CHEUNG SHA WAN, KLN.

TEL: 2743 7827, 2743 6362 FAX: 2785 7655

分行：九龍彌敦道西街1037號匯華工業大廈6樓C座

6/F, WUI WAH FACTORY BUILDING, WORKSHOP C,

1037, YEE KUK WEST ST., KLN.

TEL: 2785 2633, 2785 4783

東莞力雄五金電器塑膠制品有限公司
DONG GUAN LIK HUNG METAL ELECTRON & PLASTIC PRODUCTS CO., LTD.

地址：東莞市鳳崗鎮雁田崗興路

TEL: (0769)7771159

FAX: (0769)7772637

DONG GUAN LIK HUNG METAL ELECTRON & PLASTIC PRODUCTS CO., LTD.