

HDL6SP Residual Current Operated Circuit Breaker

Standard: IEC61009-1
 Breaking Capacity: 6000A
 Sensitivity: 30mA

Function

HDL6SP Single phase residual current operated circuit breaker can offer earth leakage protection. Usually it can be used with HDB6S.

Order Information




| Poles | Rating (A) | Sensitivity | Reference | |
|-------|------------|-------------|--------------|--------------|
| | | | B Curve | C Curve |
| 1P+N | 6 | 30mA | HDL6SPN5B6S | HDL6SPN5C6S |
| | 10 | 30mA | HDL6SPN5B10S | HDL6SPN5C10S |
| | 16 | 30mA | HDL6SPN5B16S | HDL6SPN5C16S |
| | 20 | 30mA | HDL6SPN5B20S | HDL6SPN5C20S |
| | 25 | 30mA | HDL6SPN5B25S | HDL6SPN5C25S |
| | 32 | 30mA | HDL6SPN5B32S | HDL6SPN5C32S |
| | 40 | 30mA | HDL6SPN5B40S | HDL6SPN5C40S |

Technical information

| | |
|---------------------------|--------------------------------------|
| Standard | IEC61009 |
| Breaking Capacity | 6KA |
| Poles | 1P+N |
| Rated Current | 6, 10, 16, 20, 25, 32, 40A |
| Rated Voltage | 230VAC |
| Rated Tripping Current | 10mA |
| Residual Current off time | ≤0.1s |
| Characteristic | B.C |
| Electrical endurance | 10000 |
| Mechanical endurance | 20000 |
| Protection degree | - 25°C ~ 40°C |
| Connection terminal | Flexible conductor 16mm ² |
| | Rigid conductor 25mm ² |
| Type of terminal | Lug type and Pin type |

Overall Dimensions

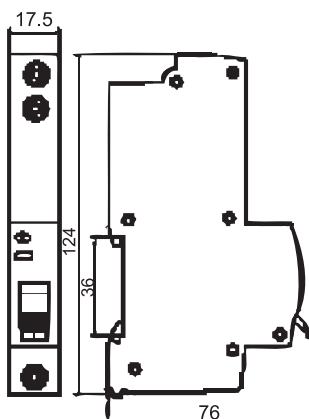

SUPERMOON
 Powering modern work and life

Order at 訂貨熱線：
 香港批發/分銷 T (852) 2781 2855
 澳門批發/分銷 T (853) 2822 2751
 工程/商業項目 T (852) 2691 9166
 E enquiry@supermoon.hk
 www.supermoon.hk